
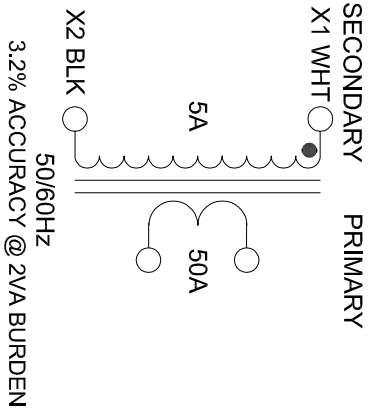


DIMENSIONS:	
A	3.75" ±0.063
B	1.35" ±0.130
C	3.25" ±0.063
D	3.00" ±0.063
E	0.870" MIN.
F	2.87" ±0.063
G	0.220" X 0.375" ±0.015

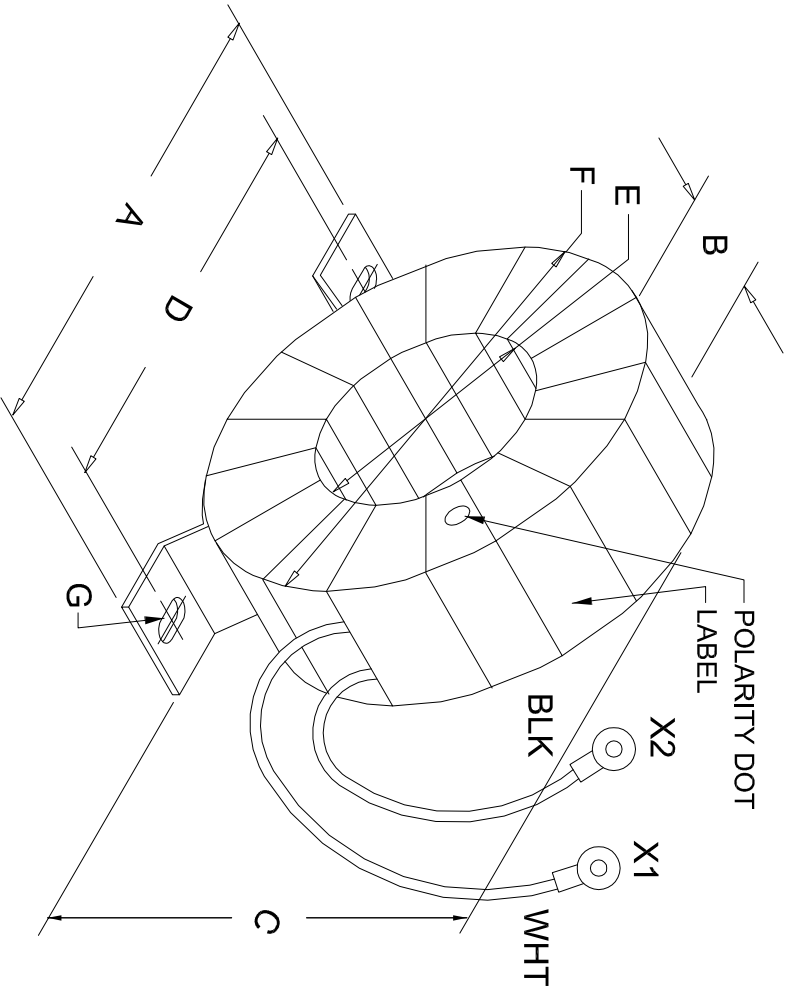

NOTE: ALL LEADS 24" OUT MIN.

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 1.0V, 60Hz, WHT - BLK	250mA Max.
DCR	@ 20°C, WHT - BLK =	0.019 Ω ±20%
HIPOT	WINDING - GROUND	2500V, 60Hz, 1 SEC
	WINDING - WINDOW	4000V, 60Hz, 1 SEC

REV.#	REVISION	DATE
0	RELEASED.	C.I. 11/05/15

HAMMOND MANUFACTURING

ELECTRONIC DIVISION

52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5

PH # (519) 886-6181
FAX # (519) 886-9540

DWG. BY: C. ILIE

DATE: 11/05/15

CHK'D BY:

APP'D. BY:

DIMENSIONS: IN(X) MM()

TITLE: CURRENT TRANSFORMER

DWG. NO. CT50A