



(DC input side)



(AC output side)



■ Features

- Compact size and light weight
- True sine wave output (THD<3%)
- High surge power up to 800W
- 250W convection, 400W forced air
- AC output voltage and frequency selectable by DIP S.W
- No load dissipation <1.5W max. at standby saving mode
- -20°C ~+70°C wide operating temperature
- Power ON-OFF remote control
- Protections :

Input : Reverse polarity / DC low alarm / DC low shutdown / Over voltage

Output : Short circuit / Overload / Over temp.

- Battery over discharge protection (Low voltage disconnect)
- Suitable for lead-acid or li-ion batteries
- Support Tx/Rx for monitoring power inverter status
- Conformal coating
- 3 years warranty

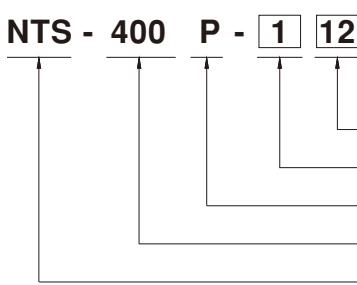
■ Applications

- Mobile device
- Home and office appliance
- Portable equipment
- Vehicle
- Yacht
- Off-grid solar power system
- Wireless network
- Telecom or datacom system

■ Description

NTS-400P is a 400W highly reliable built-in type off-grid true sine wave DC-AC power inverter. Its key features include: digital design with MCU control, streamlined control circuitry that quickly responds to environmental changes and improves reliability, compact size, light weight, 800W peak power, adjustable AC output voltage and frequency, -20~+70°C wide operating temperature range, built-in remote ON/OFF control, low no-load power consumption (energy saving mode < 1.5W max.), complete protection features, and etc. Combined with batteries, the NTS-400P is suitable for use in residential, commercial, marine, automobile, and remote areas with no access to utility power, and the output can be used to power fans, TV, radio, phone charger, PC/laptop, lighting, outdoor camping equipment, marine AC power, and etc.

■ Model Encoding



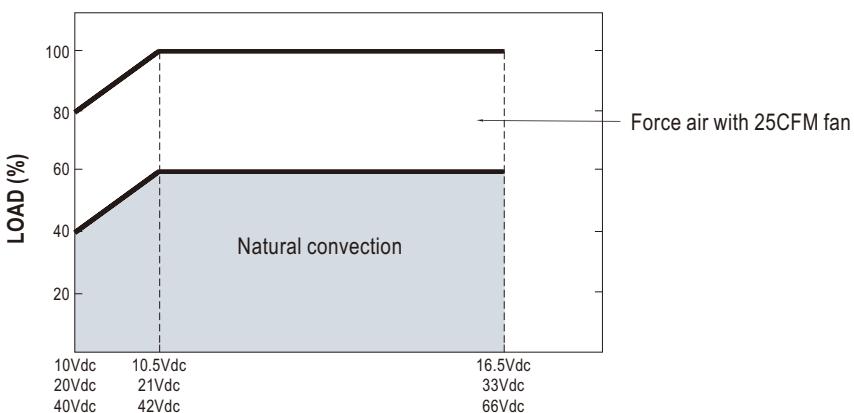
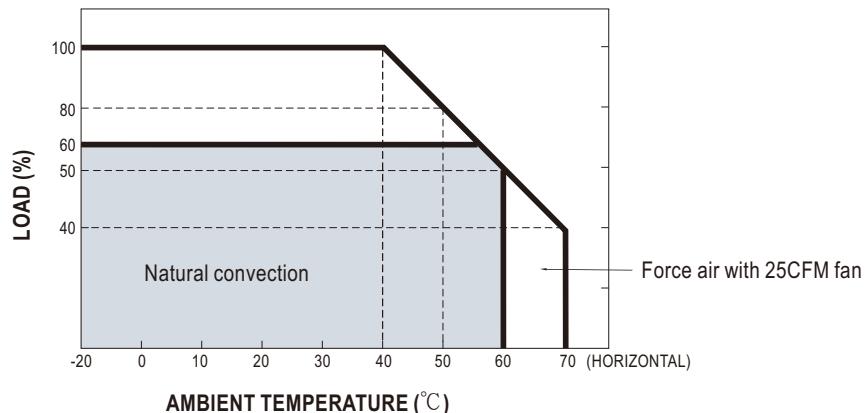
- DC input voltage (12: 12Vdc, 24: 24Vdc, 48: 48Vdc)
- AC output voltage (1: 100/110/115/120Vac, 2:200/220/230/240Vac)
- PCB Built-in type
- Rated wattage
- Series name



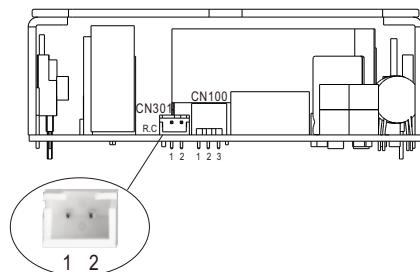
400W High Reliable Built-in Type True Sine Wave DC-AC Power Inverter NTS-400P series

SPECIFICATION

MODEL NO.		NTS-400P-112	NTS-400P-124	NTS-400P-148	NTS-400P-212	NTS-400P-224	NTS-400P-248												
AC OUTPUT	RATED POWER(Continuous)	400W																	
	OVER RATED POWER(3 Min.)	460W																	
	PEAK POWER(10 Sec.)	600W																	
	SURGE POWER(30 Cycles)	800W																	
	AC VOLTAGE	Default setting set at 110VAC		Default setting set at 230VAC															
		100 / 110 / 115 / 120Vac selectable by DIP S.W		200 / 220 / 230 / 240Vac selectable by DIP S.W															
	FREQUENCY	Default setting set at 60Hz±0.1Hz		Default setting set at 50Hz±0.1Hz															
		50/60Hz selectable by DIP S.W		50/60Hz selectable by DIP S.W															
	WAVEFORM	Note.1 True sine wave (THD<3%)																	
AC REGULATION		±3.0% at rated input voltage																	
LED STATUS		Please refer to page3																	
DC INPUT	DC VOLTAGE	12V	24V	48V	12V	24V	48V												
	VOLTAGE RANGE (Typ.)	10 ~ 16.5Vdc	20 ~ 33Vdc	40 ~ 66Vdc	10 ~ 16.5Vdc	20 ~ 33Vdc	40 ~ 66Vdc												
	DC CURRENT (Typ.)	40A	20A	10A	40A	20A	10A												
	NO LOAD DISSIPATION (Typ.)	10W	10W	12W	10W	10W	12W												
	Non-Saving mode																		
	Saving mode	Default disable, ≤1.2W ~ 1.5W by models @ auto detec AC output load ≤10W will be changed to saving mode																	
		1.2W	1.3W	1.5W	1.2W	1.3W	1.5W												
OFF MODE CURRENT DRAW		<1mA at battery ~DC input must be disconnected																	
EFFICIENCY (Typ.)		Note.1 89%	91%	91%	91%	93%	93%												
BATTERY TYPES		Lead Acid or Li-ion																	
PROTECTION	DC INPUT	FUSE(Internal)	40A*2	30A*2	10A*2	40A*2	30A*2	10A*2											
		ALARM	11±0.3Vdc	22±0.5Vdc	44±1Vdc	11±0.3Vdc	22±0.5Vdc	44±1Vdc											
		LOW SHUTDOWN	10±0.3Vdc	20±0.5Vdc	40±1Vdc	10±0.3Vdc	20±0.5Vdc	40±1Vdc											
		RESTART	12.5±0.3Vdc	25±0.5Vdc	50±1Vdc	12.5±0.3Vdc	25±0.5Vdc	50±1Vdc											
		HIGH ALARM	15.5±0.3Vdc	31±0.5Vdc	62±1Vdc	15.5±0.3Vdc	31±0.5Vdc	62±1Vdc											
		SHUTDOWN	16.5±0.3Vdc	33±0.5Vdc	66±1Vdc	16.5±0.3Vdc	33±0.5Vdc	66±1Vdc											
	AC OUTPUT	RESTART	15±0.3Vdc	30±0.5Vdc	60±1Vdc	15±0.3Vdc	30±0.5Vdc	60±1Vdc											
		BAT. POLARITY	By internal fuse open																
		OVER TEMPERATURE	Protection type : Shut down o/p voltage, re-power on to recover																
FUNCTION		OUTPUT SHORT	Protection type : Shut down o/p voltage, re-power on to recover																
ENVIRONMENT	OVER LOAD (Typ.)		105 ~ 115% load for 180 sec., 115% ~ 150% load for 10 sec.																
	REMOTE CONTROL		Power ON-OFF remote control by front panel dry contact connector (by RELAY), Open : Normal work ; Short : Remote off																
	Tx/Rx		Support Tx/Rx for monitoring power inverter status																
	WORKING TEMP.		-20 ~ +70°C (Refer to "Derating curve")																
WORKING HUMIDITY		20% ~ 90% RH non-condensing																	
STORAGE TEMP., HUMIDITY		-30 ~ +70°C / -22 ~ +158°F, 10 ~ 95% RH non-condensing																	
VIBRATION		10 ~ 500Hz, 3G 10min./1cycle, 60min. each along X, Y, Z axes																	
SAFETY & EMC (Note.3)	SAFETY STANDARDS		CB IEC62368-1 for all models																
	WITHSTAND VOLTAGE		E13, EAC TPTC004, AS/NZS 62368.1 for NTS-400P-212/224/248																
	EMC EMISSION	Parameter		Standard		Test Level / Note													
		Radiated		FCC for 112,124,148 only		Class A													
		Harmonic Current		BS EN/EN55032(CISPR32) for 212,224,248 only		Class A													
		Voltage Flicker		BS EN/EN61000-3-3		----													
	EMC IMMUNITY	Parameter		Standard		Test Level / Note													
		ESD		BS EN/EN61000-4-2		Level 4, 15KV air ; Level 4, 8KV contact													
		Radiated		BS EN/EN61000-4-3		Level 3, 10V/m													
		Magnetic Field		BS EN/EN61000-4-8		Level 4, 30A/m													
OTHERS	MTBF		278.7K hrs min. Telcordia TR/SR-332 (Bellcore) ; 84K hrs min. MIL-HDBK-217F (25°C)																
	DIMENSION		186*100.5*32mm (L*W*H)																
	PACKING		0.75Kg; 18pcs/ 14.5Kg/ 1.01CUFT																
NOTE	1. Efficiency, AC regulation and THD are tested by 400W, linear load at 12.5Vdc/25Vdc/50Vdc input voltage. 2. All parameters not specified above are measured at rated load, 25°C of ambient temperature and set to factory setting. 3. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)																		
	※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx																		

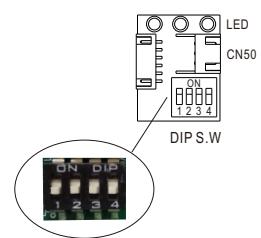
■ DERATING CURVE

■ Remote ON-OFF Control

Remote ON-OFF (CN301 PIN1,2)	AC Output Status
Open	power inverter ON
Short	power inverter OFF


■ AC output voltage, Frequency, Power saving mode selectable by DIP SW

Output Voltage and Frequency Setting Factory settings are either 110Vac/60Hz or 230Vac/50Hz, users are able to adjust the voltage and frequency, through the DIP switch of position 1,2,3,4.

AC Output Voltage, Frequency, Power saving mode selectable by DIP SW			
SW1	SW2	SW3	SW4
OFF	OFF: 100Vac or 200Vac	ON : 50Hz	ON : Saving mode
OFF	ON : 110Vac or 220Vac		
ON	OFF: 115Vac or 230Vac	OFF: 60Hz	OFF: Non-Saving mode
ON	ON : 120Vac or 240Vac		


■ Support Tx/Rx for monitoring power inverter status

Users can monitor the status of the power inverter through Tx/Rx, and can modify the input and output parameters set internally.

■ LED STATUS

Normal work:

Status	Green	Orange	Red
	 Inverter OK	 Remote off  Saving mode	 Abnormal Status (See below table)

DC Input	Green	Orange	Red
	 12.5~15.5Vdc  25~31Vdc  50~62Vdc	 11~12.5Vdc  22~25Vdc  44~50Vdc	 <11Vdc or >15.5Vdc  <22Vdc or >31Vdc  <44Vdc or >62Vdc

Load	Green	Orange	Red
	 <40% load	 40~80% load	 >80% load

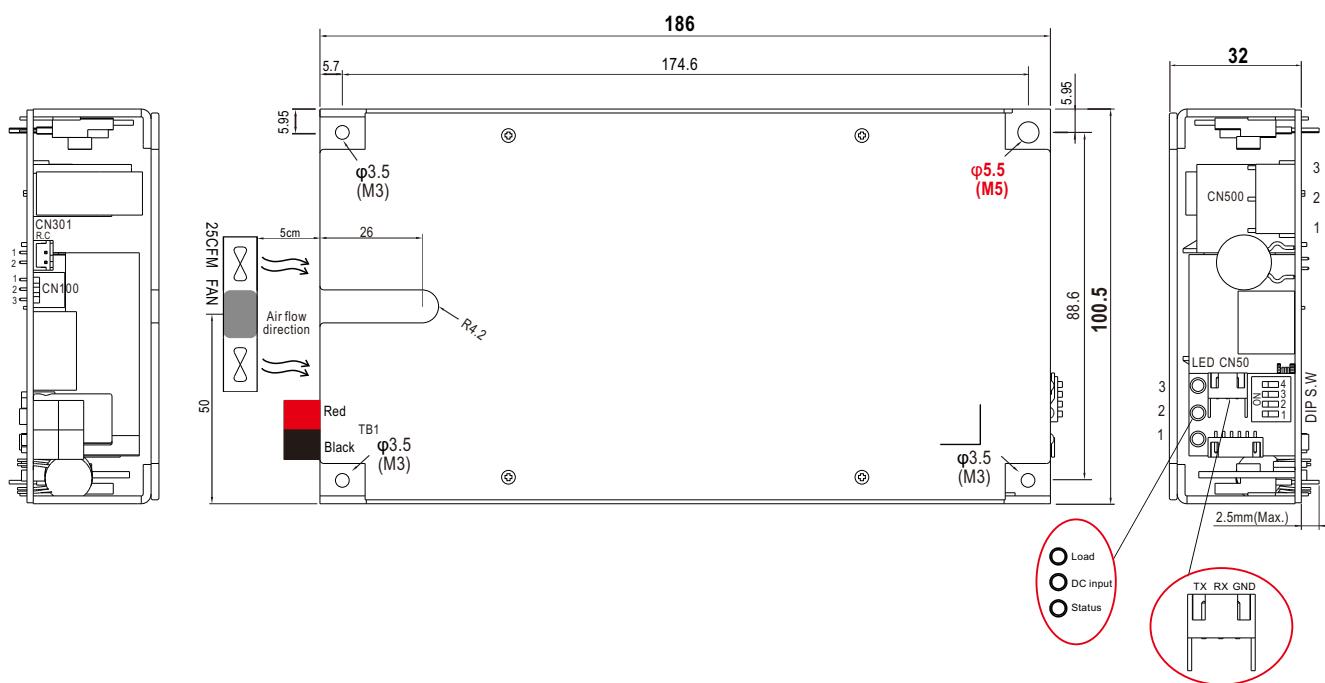
Abnormal status :

LED Indicator	Abnormal Indication
Status  DC Input  Load 	Output overload or AC output short circuit
Status  DC Input  Load 	Abnormal DC voltage
Status  DC Input  Load 	Over temperature or Fan lock
Status  DC Input  Load 	Inverter fail


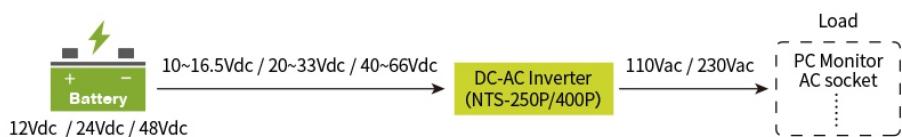
-  Light
-  Light off
-  Flash

MECHANICAL SPECIFICATION

Unit:mm



Pin	Pin No.	Description	Terminal	Mating Housing
TB1	Red	Connect to +	261G2-LPBK or equivalent	1327FP or equivalent
	Black	Connect to -		1327G6FP or equivalent
CN500	1	Output AC/L	JST SVH-21T-P1.1 or equivalent	JST VHR or equivalent
	2	Output AC/N		
	3	FG		
CN301	1	Pin 1,2 Open: Inverter Normal work	JST SXH-001T or equivalent	JST XHP or equivalent
	2	Pin 1,2 Short: Inverter Remote off		
CN50	1	Signal GND	CHYAO SHIUNN JS-2001-TX or equivalent	CHYAO SHIUNN JS-2001 or equivalent
	2	UART-RX		
	3	UART-TX		
CN100	1	+	CHYAO SHIUNN JS-2001-TX or equivalent	CHYAO SHIUNN JS-2001 or equivalent
	2	-		
	3	PWM		
DIP SW		Please refer to page3 for more detail		

■ TYPICAL APPLICATION

■ INSTALLATION MANUAL

Please refer to : <http://www.meanwell.com/manual.html>