
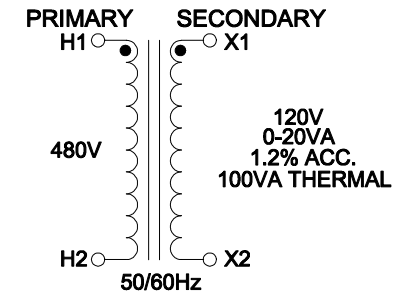


DIMENSIONS:

A	3.750" ±0.063
B	4.400" ±0.125
C	3.125" ±0.063
D	3.125" ±0.063
E	3.032" ±0.063
F	4.063" ±0.063
G	0.219" x 0.750" ±0.015

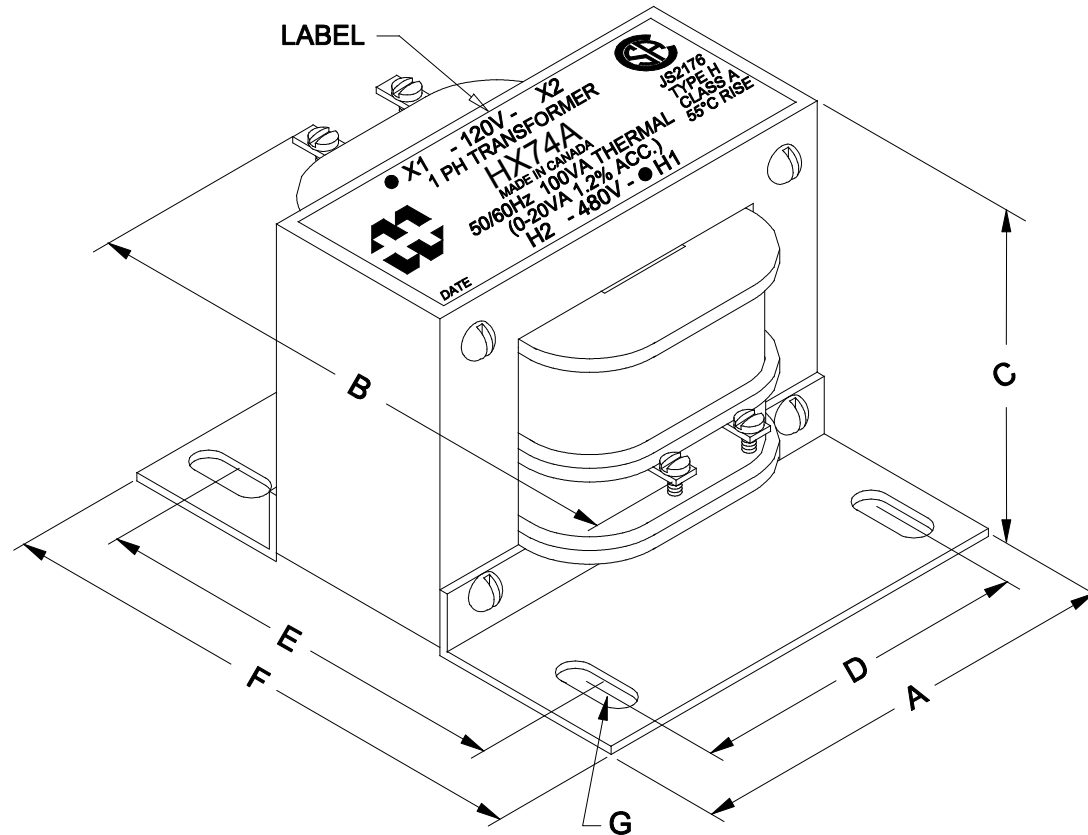

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 240V, 60Hz, H1 - H2	9.60 mA	Max.
Sec. N.L.V	@ 480V, 60Hz, H1 - H2		
	X1 - X2 =	121.4V	±1.2%
DCR	@ 20°C, H1 - H2 =	48.042 Ω	±20%
	@ 20°C, X1 - X2 =	3.015 Ω	±20%
HIPOT	PRIMARY - SECONDARY	4000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	ELECTRONIC DIVISION			
0	RELEASED.	C. I. 04/14/16	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181 FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POTENTIAL TRANSFORMER	DWG. NO. HX74A
			DATE: 04/14/16	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		

HAMMOND
MANUFACTURING™