
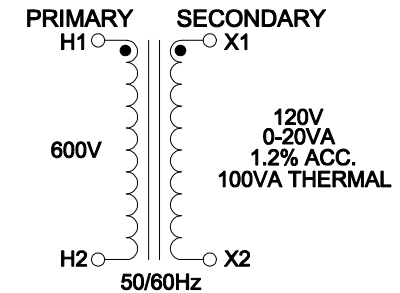


DIMENSIONS:

A	3.750" ±0.063
B	4.400" ±0.125
C	3.125" ±0.063
D	3.125" ±0.063
E	3.032" ±0.063
F	4.063" ±0.063
G	0.219" x 0.750" ±0.015

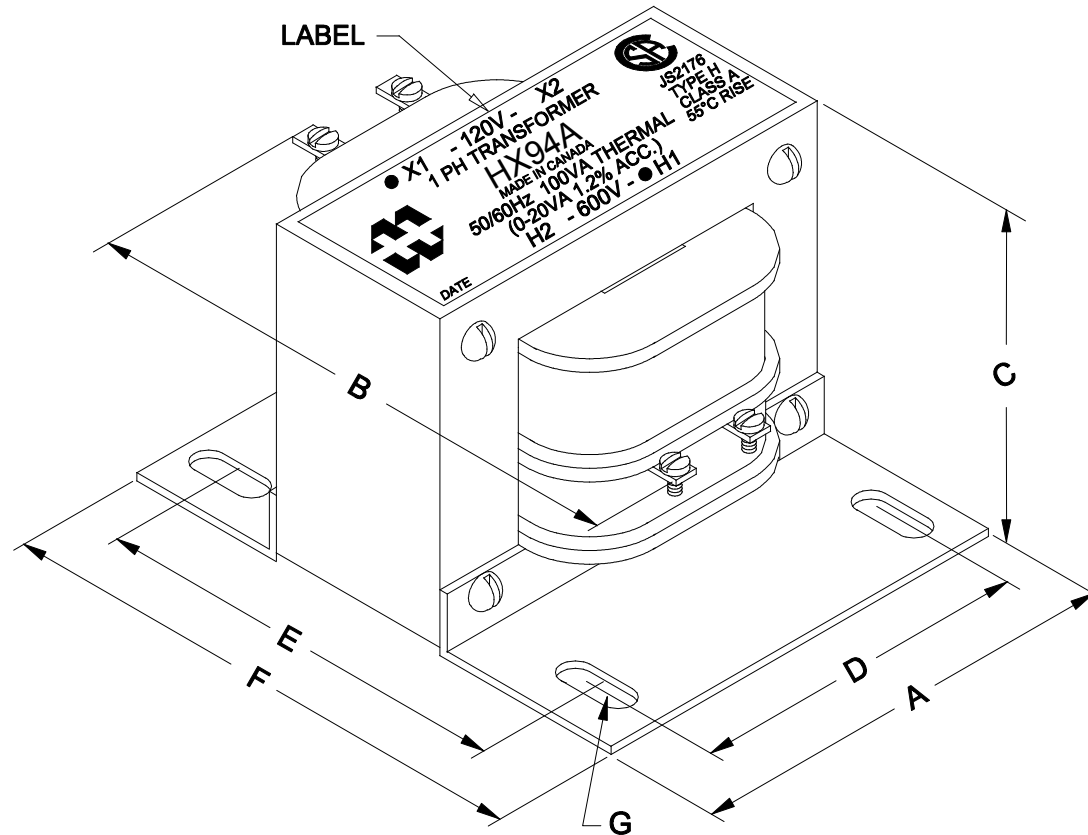

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 600V, 60Hz, H1 - H2	21.6mA	Max.
Sec. N.L.V	@ 600V, 60Hz, H1 - H2		
	X1 - X2 =	121.4V	±1.2%
DCR	@ 20°C, H1 - H2 =	75.29 Ω	±20%
	@ 20°C, X1 - X2 =	3.015 Ω	±20%
HIPOT	PRIMARY - SECONDARY	4000V, 60Hz, 1 SEC	

REV.#	REVISION		DATE	 HAMMOND MANUFACTURING™		ELECTRONIC DIVISION	
0	RELEASED.	C. I.	04/14/16	 MANUFACTURING™		52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5	
						PH # (519) 886-6181 FAX # (519) 886-9540	
				DWG. BY: C. ILIE	CHK'D BY:	TITLE: POTENTIAL TRANSFORMER	DWG. NO. HX94A
				DATE: 04/14/16	APP'D. BY: DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540