



DIMENSIONS:	
A	3.688" ± 0.063
B	1.850" ± 0.125
C	2.308" ± 0.063
D	3.125" ± 0.063
E	0.826" ± 0.063
F	2.701" ± 0.063
G	0.187" ± 0.015

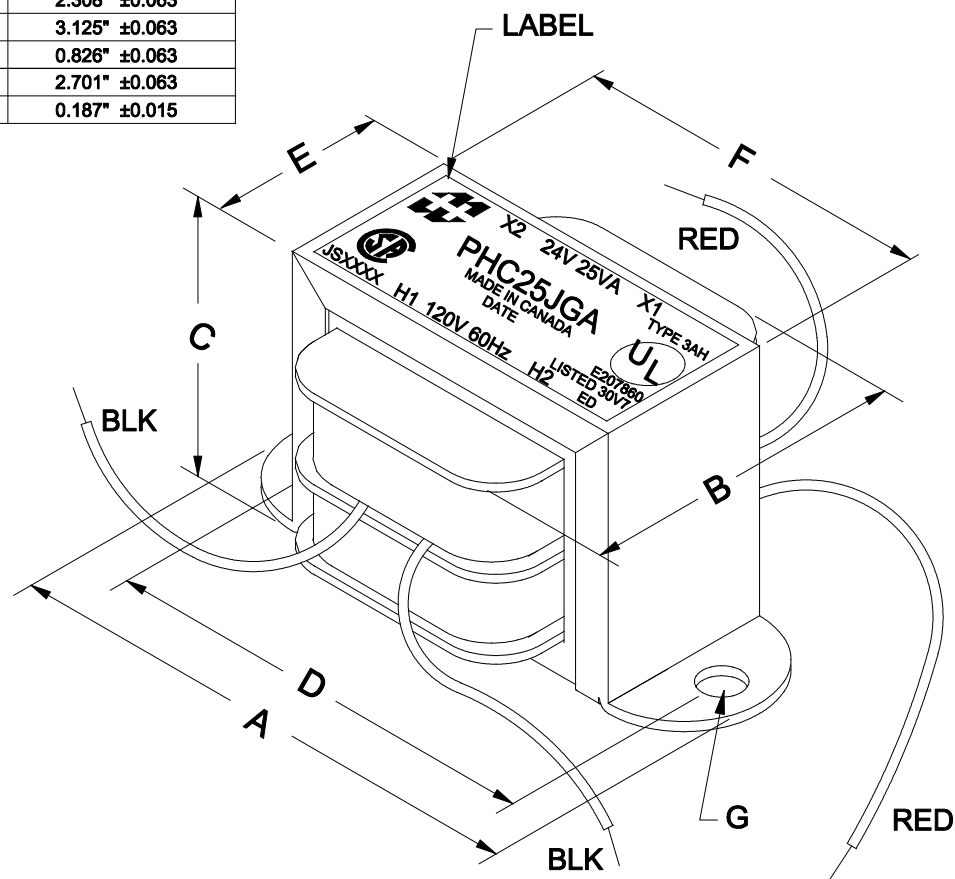

NOTE: ALL LEADS 10" OUT MIN. STRIPPED 0.5"

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 120V, 60Hz, BLK - BLK	216mA Max.
Sec. N.L.V	@ 120V, 60Hz, BLK - BLK	
	RED - RED =	26.97V $\pm 2\%$
DCR	@ 20°C, BLK - BLK =	21.00 Ω $\pm 20\%$
	@ 20°C, RED - RED =	0.950 Ω $\pm 20\%$
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION		
0	RELEASED. C.I.	07/18/19	MANUFACTURING™ 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: CONTROL TRANSFORMER
			DATE: 07/18/19	APP'D. BY:	DWG. NO. PHC25JGA
				DIMENSIONS: IN(X) MM()	

PH # (519) 886-6181
FAX # (519) 886-9540