

IEC62368-1



EN62368-1


UL458
cUL us


TPTC004



AS/NZS 62368.1

Please refer to page 3 for more details.



■ Features

- Built-in UPS function (AC by-pass)
- True sine wave output (THD<3%)
- High surge power up to 6400W
- Temperature controlled cooling fan
- AC output voltage and frequency selectable by DIP S.W
- -25°C~+70°C wide operating temperature
- Power ON-OFF remote control
- Front panel indicator for operation status
- Protections :

Input : Reverse polarity / DC. low alarm / DC low shutdown / Over voltage

Output : Short circuit / Overload / Over temp.

- Battery over discharge protection (low voltage disconnect)
- Suitable for lead-acid or li-ion batteries
- Remote controller
(IRC1, IRC2, IRC3 accessory sold separately, please refer to: <https://www.meanwell.com/webapp/product/search.aspx?prod=IRC1>)
- Support RS-232 communication(Communication cable order No.: RJ11-RS232, sold separately)
- **Carry handle accessory available**(Order NO.: Carry handle, sold separately)
- Conformal coating
- 3 years warranty

■ Applications

- Home and office appliance
- Power tools
- Portable equipment
- Vehicle
- Yacht
- Off-grid solar power system

■ GTIN CODE


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

NTU-3200 is a 3200W highly reliable off-grid true sine wave DC-AC power inverter with built-in UPS function. Its key features include: digital design with MCU control, streamlined control circuitry that quickly responds to environmental changes and improves reliability, high quality fan with low acoustic noise, 6400W peak power, adjustable AC output voltage and frequency, -25~+70°C wide operating temperature range, complete protection features, and etc. Combined with batteries, the NTU-3200 is suitable for use in residential, commercial, marine, automobile, mine, construction site, and remote areas with no access to utility power, and the output can be used to power fans, TV, radio, phone charger, PC/laptop, lighting, induction stove, air conditioner, electromechanical tool, communication equipment, power distribution cabinet, outdoor camping equipment, marine AC power, factory equipment, and etc.

■ Model Encoding

NTU - 3200 - **1** **12** **US**

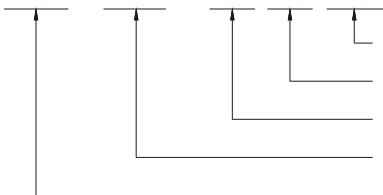

AC output socket (Type US, EU, CN, AU, UK, UN, TB outlet)

DC input voltage (12: 12Vdc, 24: 24Vdc, 48: 48Vdc)

AC output voltage (1: 100/110/115/120Vac, 2:200/220/230/240Vac)




Rated wattage




Series name



SPECIFICATION

MODEL NO.		NTU-3200-112□	NTU-3200-124□	NTU-3200-148□	NTU-3200-212□	NTU-3200-224□	NTU-3200-248□			
		□ = US, UN, TB		□ = EU, CN, AU, UK, UN, TB						
AC OUTPUT	RATED POWER(Continuous)	3000W		3200W						
	OVER RATED POWER(3 Min.)	3500W		3680W						
	PEAK POWER(10 Sec.)	4500W		4800W						
	SURGE POWER(30 Cycles)	6000W		6400W						
	AC VOLTAGE	Factory setting set at 110VAC		Factory setting set at 230VAC						
		100 / 110 / 115 / 120Vac selectable by DIP S.W		200 / 220 / 230 / 240Vac selectable by DIP S.W						
	FREQUENCY	Factory setting set at 60±0.1Hz		Factory setting set at 50±0.1Hz						
		50/60Hz selectable by DIP S.W		50/60Hz selectable by DIP S.W						
	WAVEFORM <small>Note.1</small>	True sine wave (THD<3%)								
DC INPUT	AC REGULATION	±3.0% at rated output voltage								
	FRONT PANEL LED	Please see page 5								
	DC VOLTAGE	12Vdc	24Vdc	48Vdc	12Vdc	24Vdc	48Vdc			
	VOLTAGE RANGE (Typ.)	10 ~ 16.5Vdc	20 ~ 33Vdc	40 ~ 66Vdc	10 ~ 16.5Vdc	20 ~ 33Vdc	40 ~ 66Vdc			
	DC CURRENT (Typ.)	300A	150A	75A	320A	160A	80A			
	NO LOAD DISSIPATION (SAVING MODE)(Typ.) <small>Note.2</small>	Default disable, auto detect AC output load≤10W will be changed to saving mode								
	OFF MODE CURRENT DRAW	≤2mA								
	EFFICIENCY (Typ.) <small>Note.1</small>	89%	90%	91%	90%	92%	93%			
	BATTERY TYPES	Lead Acid or li-ion								
PROTECTION	DC INPUT	FUSE (INTERNAL)	40A*12	40A*6	25A*6	40A*12	40A*6	25A*6		
		LOW	ALARM	11±0.3Vdc	22±0.5Vdc	44±1Vdc	11±0.3Vdc	22±0.5Vdc		
		SHUTDOWN	10±0.3Vdc	20±0.5Vdc	40±1Vdc	10±0.3Vdc	20±0.5Vdc	40±1Vdc		
		RESTART	12.5±0.3Vdc	25±0.5Vdc	50±1Vdc	12.5±0.3Vdc	25±0.5Vdc	50±1Vdc		
		HIGH	ALARM	15.5±0.3Vdc	31±0.5Vdc	62±1Vdc	15.5±0.3Vdc	31±0.5Vdc		
		SHUTDOWN	16.5±0.3Vdc	33±0.5Vdc	66±1Vdc	16.5±0.3Vdc	33±0.5Vdc	66±1Vdc		
	AC OUTPUT	RESTART	15±0.3Vdc	30±0.5Vdc	60±1Vdc	15±0.3Vdc	30±0.5Vdc	60±1Vdc		
		BAT. POLARITY	By internal fuse open							
		OVER TEMPERATURE	Protection type : Shut down o/p voltage, re-power on to recover							
		OUTPUT SHORT	Protection type : Shut down o/p voltage, re-power on to recover							
FUNCTION	RS-232 COMMUNICATION	105 ~ 115% load for 180 sec., 115% ~ 150% load for 10 sec.								
		PROTECTION		Protection type : Shut down o/p voltage, re-power on to recover						
	AC INPUT RANGE	100/110/115/120Vac±16%, recover±13%		200/220/230/240Vac±16%, recover±13%						
	FREQUENCY RANGE	45 ~ 65Hz								
	TRASFER TIME(Typ.)	10ms inverter ← AC by pass								
ENVIRONMENT	WORKING TEMP.	-25 ~ +70°C (Refer to "Derating curve")								
	WORKING HUMIDITY	20% ~ 90% RH non-condensing								
	STORAGE TEMP., HUMIDITY	-30 ~ +70°C / -22 ~ +158°F, 10 ~ 95% RH non-condensing								
	VIBRATION	10 ~ 500Hz, 3G 10min./1cycle, 60min. each along X, Y, Z axes								
SAFETY & EMC (Note.5)	SAFETY STANDARDS	CB IEC62368-1,Dekra Seal BS EN/EN62368-1,UL458, E13,EAC TP TC 004,AS/NZS 62368.1 approved (Please refer to next page "AC output socket" table for more details)								
	WITHSTAND VOLTAGE	DC I/P - AC I/P:3.0KVAC DC I/P - AC O/P:3.0KVAC AC O/P - FG:1.5KVAC								
	EMC EMISSION	Parameter	Standard		Test Level / Note					
		Radiated	FCC for 112,124,148 only(expect for Type-UN)		Class A					
		Conducted	BS EN/EN55032(CISPR32) for 212,224,248 only(expect for Type-UN)		Class A					
		Harmonic Current	FCC for 112,124,148 only(expect for Type-UN)		Class A					
		Voltage Flicker	BS EN/EN61000-3-2		Class A					
	EMC IMMUNITY	Parameter	Standard		Test Level / Note					
		ESD	BS EN/EN61000-4-2		Level 3, 8KV air ; Level 2, 4KV contact					
		Radiated	BS EN/EN61000-4-3		Level 2					
		EFT / Burst	BS EN/EN61000-4-4		Level 2, 1KV					
		Surge	BS EN/EN61000-4-5		Level 3, 1KV/Line-Line 2KV/Line-Earth					
		Conducted	BS EN/EN61000-4-6		Level 2					
		Magnetic Field	BS EN/EN61000-4-8		Level 1					
		Voltage Dips and Interruptions	BS EN/EN61000-4-11		>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods					
OTHERS	MTBF	319.3K hrs min. Telcordia TR/SR-332 (Bellcore) ; 30.3K hrs min. MIL-HDBK-217F (25°C)								
	DIMENSION	420*270*98mm (L*W*H)								
	PACKING	8.6Kg; 1pcs/ 10.4Kg/ 1.39CUFT								
NOTE	1.Efficiency, AC regulation and THD are tested by 2400W load, linear load at 12.5Vdc/25Vdc/50Vdc input voltage.									
	2.No load dissipation at non-saving mode(Typ.); 112/124/148 for 25W, 212/224/248 for 55W.									
	3.All parameters not specified above are measured at rated load, 25°C of ambient temperature and set to factory setting.									
	4.Internal pre-start circuit, the setup time is 8s.									
	5.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf)									
	※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx									

■ AC Output Socket

MODEL NO.	NTU-3200-112 <input type="checkbox"/>	NTU-3200-124 <input type="checkbox"/>	NTU-3200-148 <input type="checkbox"/>
Socket type			
	TYPE-US	TYPE-UN	TYPE-TB
	In Stock	In Stock	In Stock
Country	USA	UNIVERSAL	UNIVERSAL
Certificate	CB  FC	None	CB   FC


MODEL NO.	NTU-3200-212 <input type="checkbox"/>	NTU-3200-224 <input type="checkbox"/>	NTU-3200-248 <input type="checkbox"/>
Socket type			
	TYPE-EU	TYPE-CN	TYPE-UK
	In Stock	In Stock	By request
Country	EUROPE	CHINA	U.K
Certificate	CB     	CB     	 

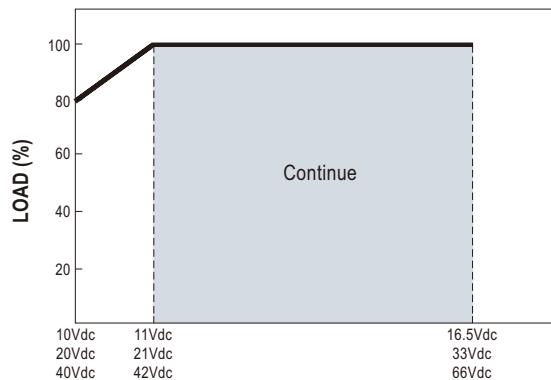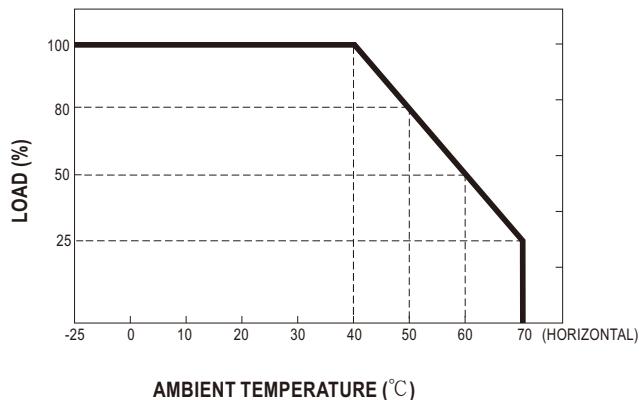■ DERATING CURVE


■ IRC1/2/3 Remote Controller (Accessory sold separately)

- IRC1/IRC2/IRC3 is the monitoring and control unit.
- IRC1/IRC2/IRC3 can decode the RS-232 signals sent by the inverter series and display through digital meters.


Note: Part of the control signals will not function properly due to different compliance of each model.

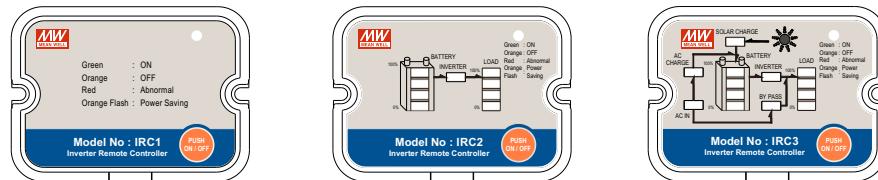

※ Please refer to for more detail: <https://www.meanwell.com/webapp/product/search.aspx?prod=IRC1>

■ Support RS-232 Communication

- The internal data of single NTU-3200 can read through RS-232.

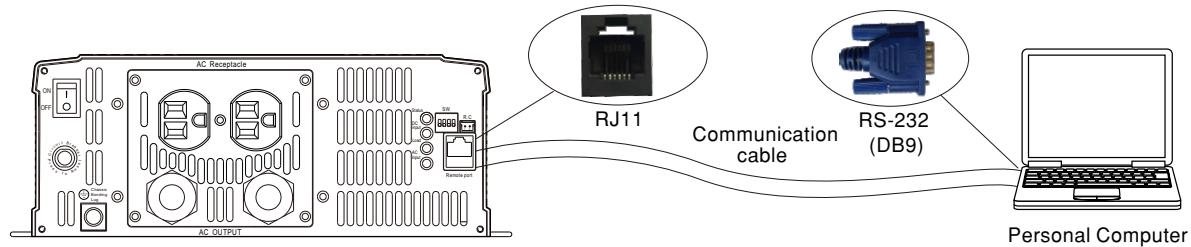

※ Please refer to for more detail: <http://www.meanwell.com/manual.html>


※ RJ11-RS232 Communication cable should be ordered separately, Order No.: RJ11-RS232

■ Remote ON-OFF Control (Built-in)

Remote ON-OFF	AC Output Status
Open	power inverter ON
Short	power inverter OFF

■ AC Output Voltage, Frequency, Power saving mode selectable by DIP SW

Output voltage and frequency setting factory settings are either 110Vac/60Hz or 230Vac/50Hz, users are able to adjust the voltage and frequency, through the DIP switch of position 1,2,3,4 on the panel.

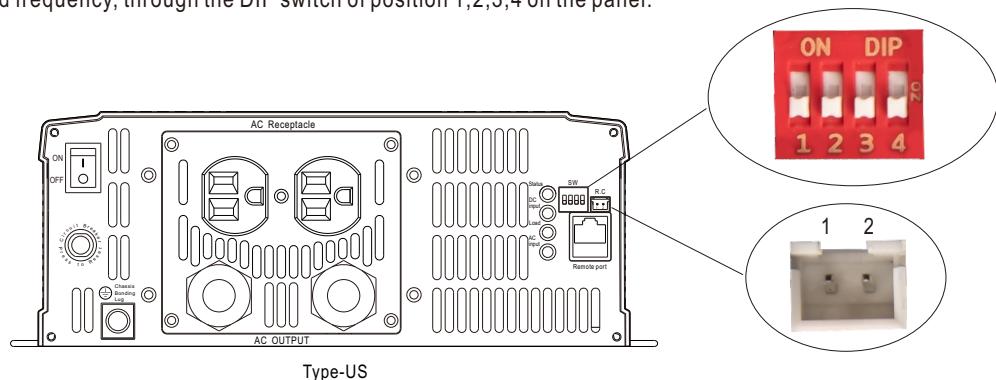

AC Output Voltage, Frequency, Power saving mode selectable by DIP SW			
SW1	SW2	SW3	SW4
OFF	OFF : 100Vac or 200Vac	ON : 50Hz	ON : Saving mode
OFF	ON : 110Vac or 220Vac		
ON	OFF : 115Vac or 230Vac	OFF: 60Hz	OFF: Non-Saving mode
ON	ON : 120Vac or 240Vac		

■ LED STATUS

Normal work:

Status	Green	Orange	Red
	 System check  Inverter OK	 Remote off  Saving mode	 Abnormal Status (See below table)

DC Input	Green	Orange	Red
	 12.5~15.5Vdc  25~31Vdc  50~62Vdc	 11~12.5Vdc  22~25Vdc  44~50Vdc	 <11Vdc or >15.5Vdc  <22Vdc or >31Vdc  <44Vdc or >62Vdc

Load	Green	Orange	Red
	 <40% load	 40~80% load	 >80% load

Abnormal status :



LED Indicator	Abnormal Indication
Status 	
DC Input 	Output overload or AC output short circuit
Load 	
Status 	
DC Input 	Abnormal DC voltage
Load 	
Status 	
DC Input 	Over temperature or Fan lock
Load 	
Status 	
DC Input 	Inverter fail
Load 	

 Light


 Light off

 Flash


■ MECHANICAL SPECIFICATION

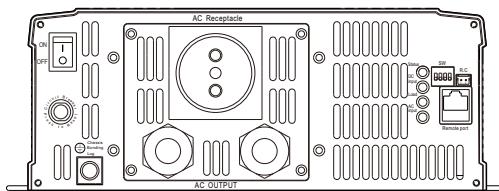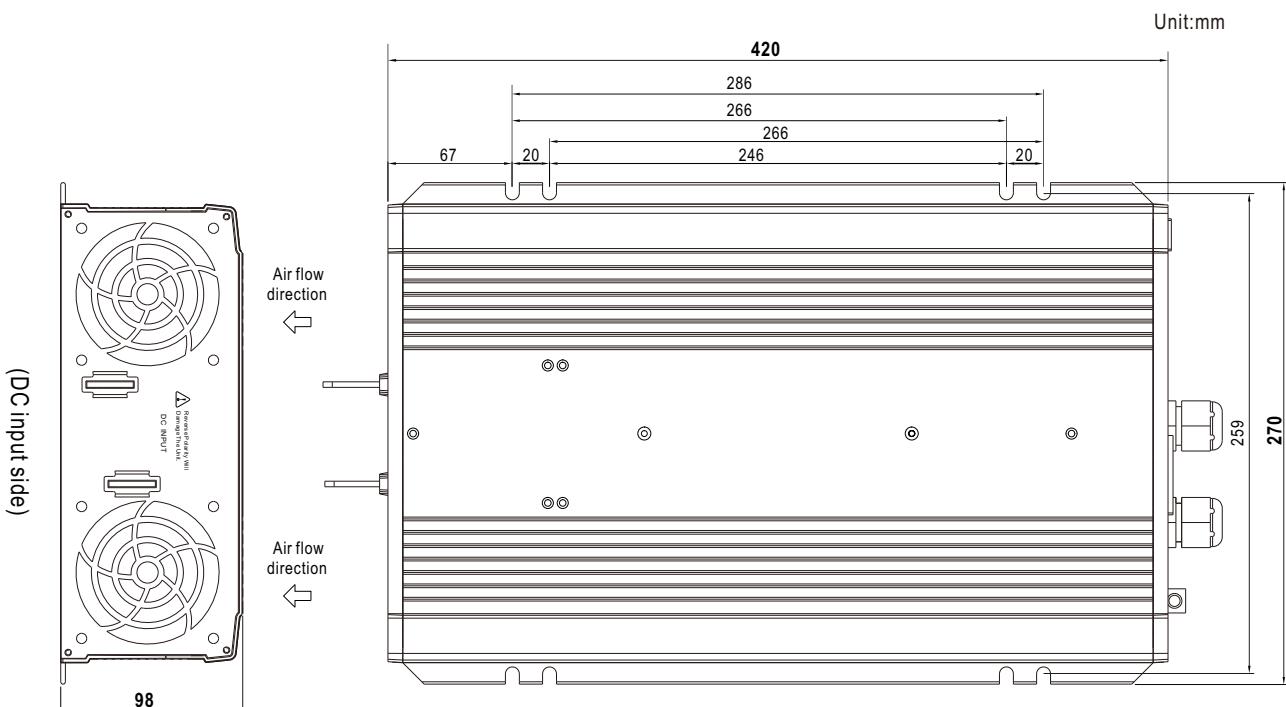


Type-EU

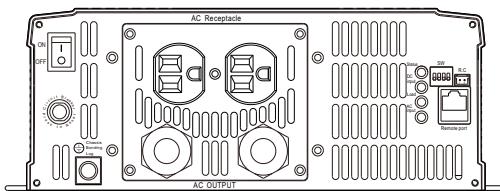


Type-US

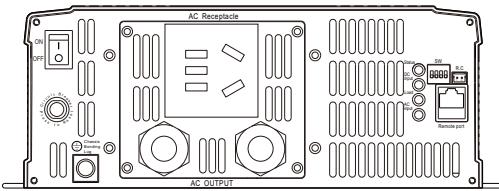

Type-CN

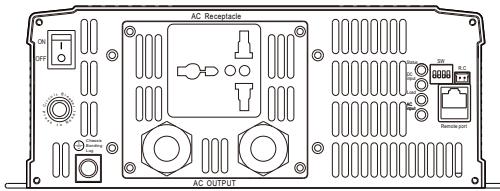

Type-UN

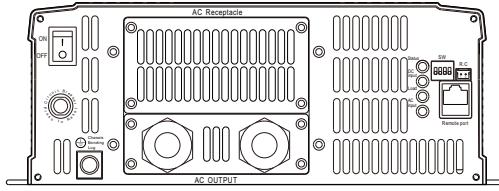

Type-TB

(AC output side)

R.C Connector : JST B-XH or equivalent

Remote Control	Mating Housing	Terminal
Pin 1,2 Open: Normal work	JST XHP	JST SXH-001T
Pin 1,2 Short: Remote off	or equivalent	or equivalent

Remote port connector (RJ11)



Assignment	Rx	GND	Tx
Remote port	2	3	4
DB9	3	5	2

Directions for use TB socket


Socket type	Withstand Current	Note
US	15A	When the load current is over withstand current, must use output terminal connection which can be found inside the AC output panel of the inverter.
EU	16A	
CN	10A	
UN	16A	
UK	13A	
AU	10A	

■ Accessory List


※ Communication cable (Optional accessory, Power inverter and Communication cable should ordered seperately)

MW's Order No.	Item	Quantity
RJ11-RS232		1


※ Carry handle (Optional accessory, Power inverter and Pull handle should ordered seperately)

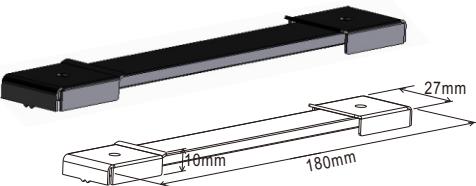MW's Order No.	Item	Quantity
Carry Handle	① Handle 	1
	② Foot pad 	4
	③ Screw 	2



① Handle

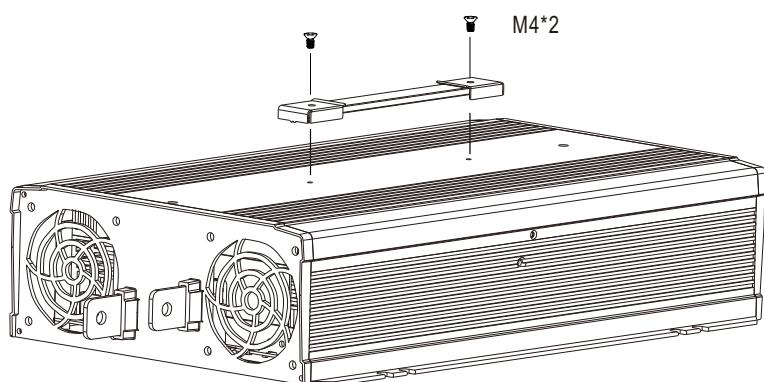



② Foot pad

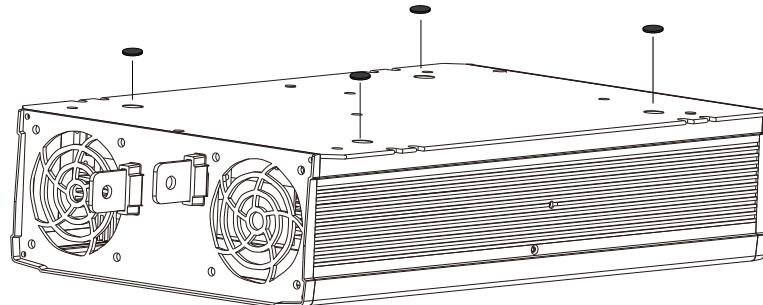

※ Terminal protector mating along with NTU-3200 (Standard accessory)

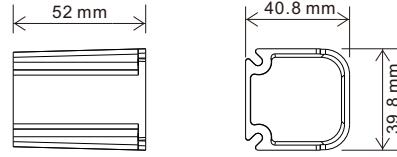Item			Quantity
①			1
②			1
③			4

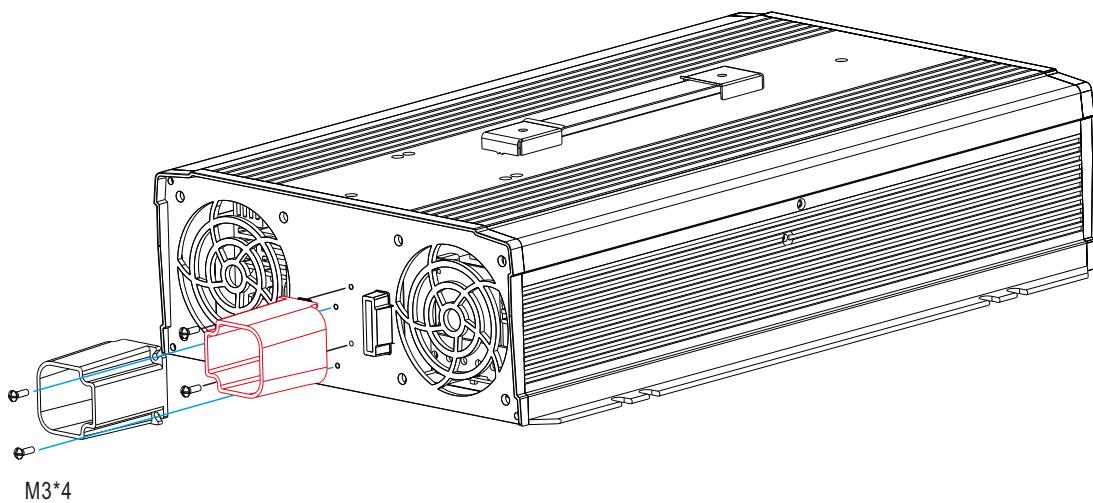


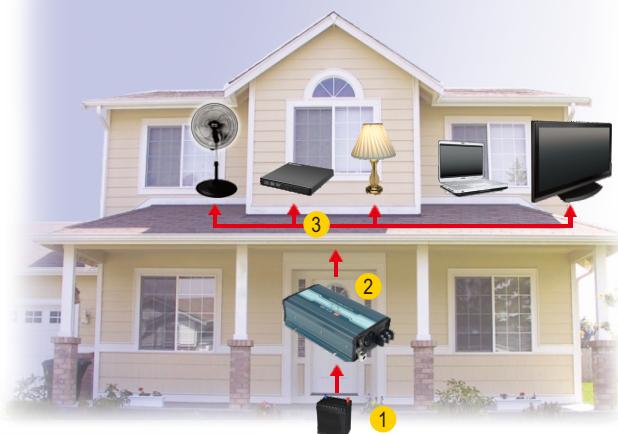■ TYPICAL APPLICATION


- 1 Battery Bank
- 2 Off-Grid DC/AC Solar Inverter (NTS series)
- 3 AC Outlet



- 1 Utility Input (Shore)
- 2 AC/DC Battery Charger (PB/NPB/NPP series)
- 3 Battery Bank
- 4 Off-Grid AC/DC Power Inverter (NTS series)
- 5 AC Outlet

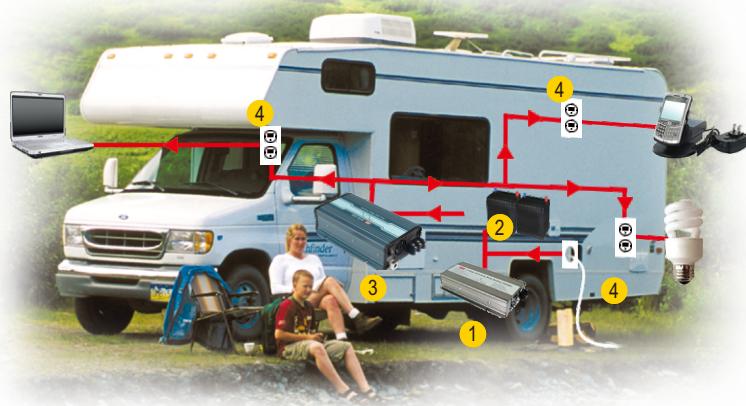

- 1 AC/DC Battery Charger (PB/NPB/NPP series)
- 2 Battery Bank
- 3 Off-Grid DC/AC Inverter (NTS series)
- 4 AC Outlet

■ INSTALLATION MANUAL

Please refer to : <http://www.meanwell.com/manual.html>