

Distributed by:



**[www.Jameco.com](http://www.Jameco.com) ♦ 1-800-831-4242**

The content and copyrights of the attached  
material are the property of its owner.

Jameco Part Number 136574

## MODEL ECM-60P (RoHS)


## OMNI DIRECTIONAL

### 1. SENSITIVITY

(0dB=1V/ $\mu$  bar, 1KHz,  
VCC=4.5V, RL=1K $\Omega$ )

C: -64+/-3dB


### 2. CIRCUIT DIAGRAM

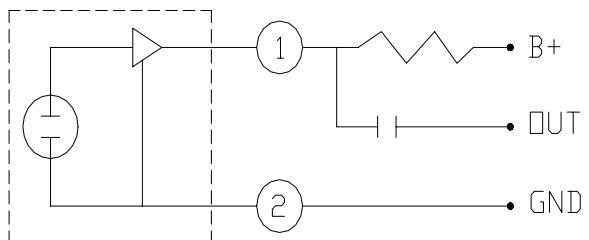


### 3. SPECIFICATIONS

1. IMPEDANCE : LOW
2. STANDARD VOLTAGE : 4.5V
3. RANGE OF OPERATING VOLTAGE : 1.5V TO 10V
4. CURRENT DRAIN : 0.5mA MAX
5. S/N RATIO : 40 dB or more
6. MAXIMUM INPUT SOUND PRESSURE : 120 dB SPL
7. RoHS Compliant.

### 4. DIMENSION

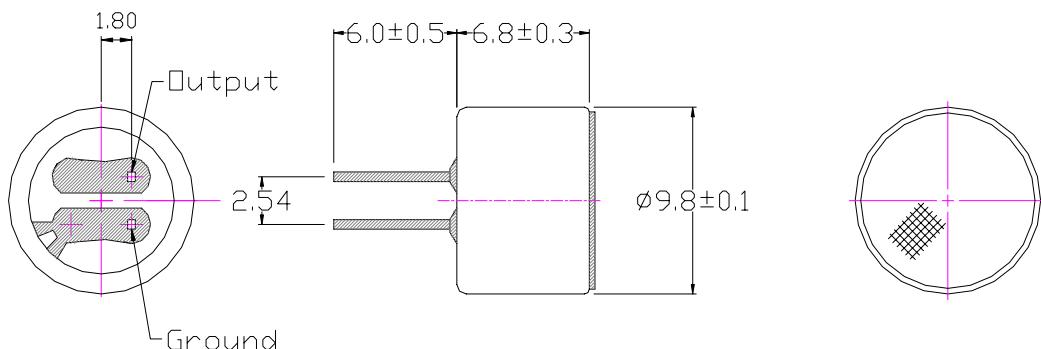

### 5. TYPICAL FREQUENCY RESPONSE CURVE

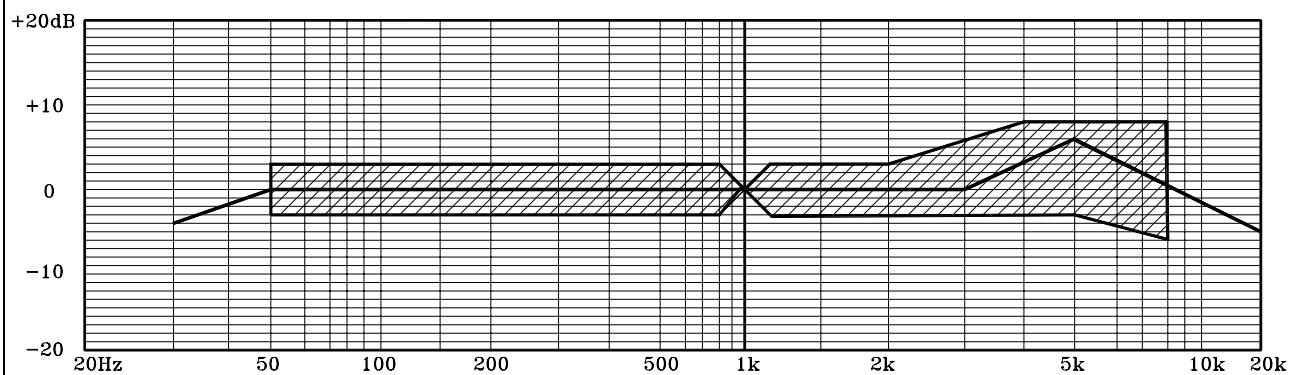

### 6. RELIABILITY TEST

VIBRATION TEST	TO BE NO INTERFERENCE IN OPERATION AFTER VIBRATION 12Hz TO 50Hz FOR 1 MINUTE FULL AMPLITUDE, FOR 1.5 HOUR AT 3 AXISES.
DROP TEST	TO BE NO INTERFERENCE IN OPERATION AFTER DROPPED TO CONCRETE FLOOR EACH ONE TIME FROM 1 METER HEIGHT AT 3 DIRECTIONS IN STATE OF PACKING.
TEMPERATURE TEST	<p>a) AFTER EXPOSURE AT 55° FOR 1 HOUR, SENSITIVITY TO BE WITHIN +/-3dB FROM INITIAL.</p> <p>b) AFTER EXPOSURE AT -10° FOR 1 HOUR, SENSITIVITY TO BE WITHIN +/-3dB FROM INITIAL.</p> <p>(THE MEASUREMENT TO BE DONE AFTER 2 HOURS OF CONDITIONING AT 25°C.)</p>
HUMIDITY TEST	<p>AFTER EXPOSURE AT 40°C AND 95% RH FOR 48 HOURS, SENSITIVITY TO BE WITHIN +/-3dB FROM INITIAL.</p> <p>(AFTER 1 HOUR OF CONDITIONING AT 25°C.)</p>
TEMPERATURE CYCLE TEST	<p>AFTER EXPOSURE AT -10°C FOR 1 HOUR, AT 25°C FOR 1 HOUR, AT 50°C FOR 1 HOUR, AT 25°C FOR 2 HOURS, 4 CYCLES, SENSITIVITY TO BE WITHIN +/-3dB.</p> <p>(AFTER 2 HOURS OF CONDITIONING AT 25°C)</p>

#### \*REGARDING THE SOLDERING OPERATION :

EACH CONDENSER MICROPHONE CONTAINS A FET WITHIN ITS CASE.

GENERALLY, OVER-HEATING, OVER-CHARGE OF VOLTAGE IS EASY TO DESTROY SEMICONDUCTORS.

1. USE 30W (OR UNDER) SOLDERING IRON AND MAINTAIN 230°~260°C IN OPERATION.
2. SOLDERING SHOULD BE ACCOMPLISHED WITHIN TWO SECONDS AT EACH TERMINAL SO AS NOT TO BE OVERHEATED.
3. DO NOT MAKE A CAVITY AT THE SURFACE OF LEAD ON THE PATTERN PLATE. (A CAVITY MAY CHANGE THE CHARACTERISTICS OF CONDENSER MICROPHONE.)