
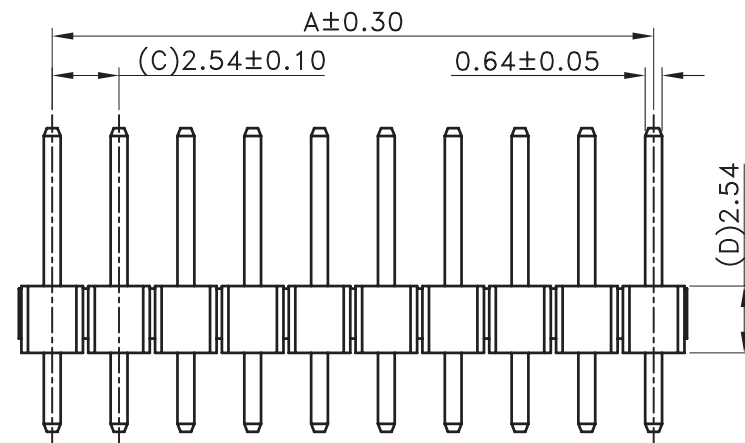
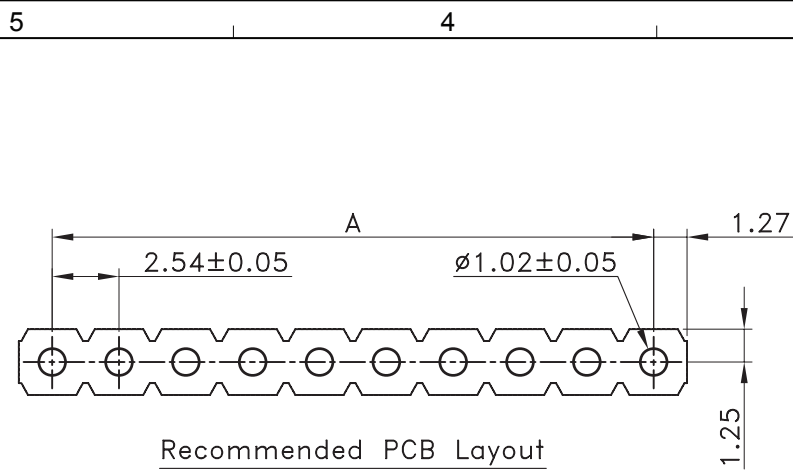


2		1
Date	Rev.	Description

■ SPECIFICATIONS

- Current Rating : 3A AC/DC
- Withstanding Voltage : 1,000V AC/minute
- Insulation Resistance : 1,000M Ω min
- Temperature Range :
 1. PBT : -25 $^{\circ}$ C to +85 $^{\circ}$ C
 2. Nylon6T : -40 $^{\circ}$ C to +105 $^{\circ}$ C
- Contact Resistance : 20m Ω max

■ 2.54mm PIN HEADER

- Part No. : JS-1109-XX(XX)

Poles No. $\leftarrow$

Base $\leftarrow$

Blank : PBT
6T : Nylon6T

- Poles : 02~40
- Material :
 1. Contact : Brass, Gold Plated
 2. Base : Refer the above options
- Packing : Bag

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2	2.54	5.08	22	53.34	55.88
3	5.08	7.62	23	55.88	58.42
4	7.62	10.16	24	58.42	60.96
5	10.16	12.70	25	60.96	63.50
6	12.70	15.24	26	63.50	66.04
7	15.24	17.78	27	66.04	68.58
8	17.78	20.32	28	68.58	71.12
9	20.32	22.86	29	71.12	73.66
10	22.86	25.40	30	73.66	76.20
11	25.40	27.94	31	76.20	78.74
12	27.94	30.48	32	78.74	81.28
13	30.48	33.02	33	81.28	83.82
14	33.02	35.56	34	83.82	86.36
15	35.56	38.10	35	86.36	88.90
16	38.10	40.64	36	88.90	91.44
17	40.64	43.18	37	91.44	93.98
18	43.18	45.72	38	93.98	96.52
19	45.72	48.26	39	96.52	99.06
20	48.26	50.80	40	99.06	101.60
21	50.80	53.34			

DCC. NO.
A4 DRAWING NO.

MATERIAL		GOLDSUN ELECTRONICS CO., LTD.	
		JAMECO NO.	GOLDSUN NO.
		117560	JS-1109-4-R
DRAWN: Ivan Wang		DESCRIPTION 0.1" SINGLE ROW HEADER 4PIN STRAIGHT	
VERIFY PEOPLE: Jenny		UNIT: mm	Rev. 1
		SCALE:	SHEET 1 OF 1
		CAS No: ERN No:	