



## Features

- \* Universal Input Range 85~264Vac
- \* Efficiency to 81%
- \* Industry Standard Pin Out
- \* Meets EN55032 Class B
- \* Continuous Short Circuit Protection
- \* PCB Mountable Type is Available

# CFM20 SERIES

## 20 WATT OPEN FRAME

### AC-DC MODULES



MODEL	OUTPUT VOLTAGE	MAX. LOAD	MIN. LOAD	RIPPLE & NOISE NOTE 1	VOLTAGE ACCURACY NOTE 2	LINE REGULATION NOTE 3	LOAD REGULATION NOTE 4	% EFF. (Typ.) NOTE 5
CFM2001S	5 V	4400 mA	0 A	1%	±1%	±0.5%	±1%	72%
CFM2002S	12 V	1800 mA	0 A	1%	±1%	±0.5%	±1%	79%
CFM2003S	15 V	1400 mA	0 A	1%	±1%	±0.5%	±1%	80%
CFM2005S	24 V	920 mA	0 A	1%	±1%	±0.5%	±1%	81%
CFM2007S	3.3 V	4400 mA	0 A	50mV	±1%	±0.5%	±1%	66%
CFM2009S	9 V	2450 mA	0 A	1%	±1%	±0.5%	±1%	76%

Specifications are subject to change without notice.

## Specifications

## CFM20S Series Derating Curve

## **INPUT SPECIFICATIONS:**

Voltage .....	85~264Vac 120~370Vdc
Frequency .....	47 to 63Hz
Inrush Current .....	40A max. @230Vac
Conducted EMI .....	CISPR/FCC Class B
Leakage Current .....	3.5mA max.

## OUTPUT SPECIFICATIONS:


Holdup Time .....	16ms typ. @115Vac
Short Circuit Protection .....	Hiccup Mode (Auto Recovery)
Over Voltage Protection .....	TVS Component to Clamp
Temperature Coefficient .....	$\pm 0.05\%$ /°C. max.

## GENERAL SPECIFICATIONS:

Isolation .....	Input to output = 4,242VDC
Operating Temperature .....	0 ~ 70°C (See Derating Curve)
Storage Temperature .....	-20~85°C
Humidity .....	93% RH max. Non Condensing
Cooling .....	Natural Convection
Switching Frequency .....	67KHz Typical
MTBF .....	MIL-HDBK-217F, GB, 25°C/115VAC 300Khrs min.
Altitude .....	2000m
Dimensions .....	3.501x2.000x0.906Inches (88.92x50.80x23.00mm)
(CFM200XS-P)	3.501x2.000x1.000Inches (88.92x50.80x25.40mm)
Weight .....	100g (0.22 Pounds)

## SAFETY AND EMC:


Emission and Immunity	EN55032 Class B EN61000-6-3, EN61000-3-2, EN61000-3-3
Safety	EN55024, EN61204-3, EN61000-6-1 EN/IEC/UL 60950-1, EN/IEC/UL 62368-1

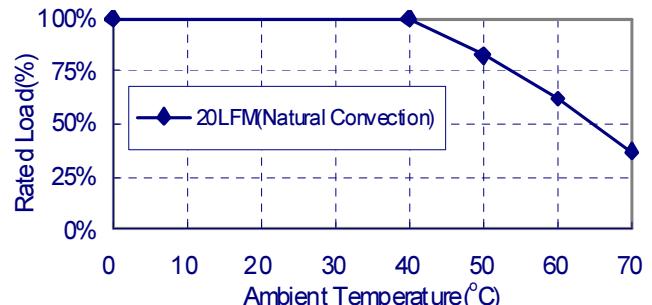

## NOTE-

1. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for Ripple & Noise measuring @20MHz BW.
2. Voltage accuracy is set at 100% rated load and 25°C Ta.
3. Line regulation is measured from high line to low line with full load.
4. Load regulation is measured from full to 10% load.
5. Typical efficiency at 230VAC and full load at 25°C.
6. Standard input and output connectors wafer with LONG CHU P3060 series and mate with MOLEX housing 5195 series or equivalent.
7. Model "CFM200XS-P": Connectors with pcb mountable type.

## ***Mechanical Specification***

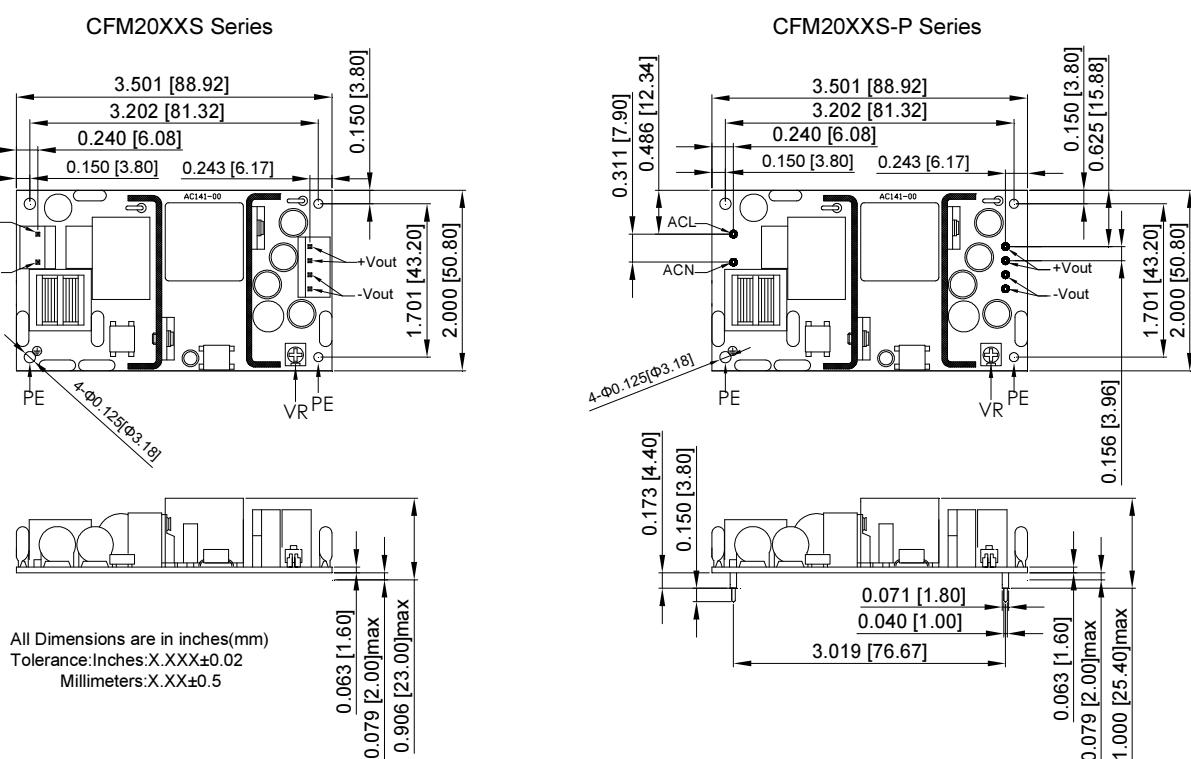

Typical at 25°C, nominal line and 75% load, unless otherwise Specified



# CFM20 Series

## Application Note V10 February 2021

---

### 20W AC-DC Power Supply CFM20 Series APPLICATION NOTE



#### Approved By:

Department	Approved By	Checked By	Written By
Research and Development Department	Enoch	Yang	Horard
		Ovid	
Quality Assurance Department	Ryan	Benny	



# CFM20 Series

## Application Note V10 February 2021

---

### Content

<b>1. INTRODUCTION</b>	<b>3</b>
<b>2. CFM20 SERIES FEATURES</b>	<b>3</b>
<b>3. ELECTRICAL BLOCK DIAGRAM</b>	<b>3</b>
<b>4. TECHNICAL SPECIFICATIONS</b>	<b>4</b>
<b>5. MAIN FEATURES AND FUNCTIONS</b>	<b>6</b>
5.1 <i>Operating Temperature Range</i>	6
5.2 <i>Continuous Short Circuit Protection</i>	6
<b>6. EMC &amp; SAFETY</b>	<b>6</b>
<b>7. APPLICATIONS</b>	<b>6</b>
7.1 <i>Power De-Rating Curve</i>	6
7.2 <i>Test Set-Up</i>	6
7.3 <i>Output Ripple and Noise Measurement</i>	6
7.4 <i>Installation Instruction</i>	7
<b>8. PART NUMBER</b>	<b>8</b>
<b>9. MECHANICAL OUTLINE DIAGRAMS AND PACKING INFORMATION</b>	<b>8</b>
9.1. Mechanical Outline Diagrams	8
9.2. <i>Packing Information</i>	9



# CFM20 Series

## Application Note V10 February 2021


### 1. Introduction

This application note describes the features and functions of Cincon's CFM20 series of open frame, switching AC-DC power module. These are highly efficient, reliable, compact, high power density, single output AC/DC power modules. The module is fully protected against short circuit and over-voltage conditions. Cincon's world class automated manufacturing methods, together with an extensive testing and qualification program, ensure that the CFM20 series power module is extremely reliable.

### 2. CFM20 Series Features

- Universal Input Range 85~264V<sub>ac</sub>
- Efficiency to 81%
- Industry Standard Pin Out
- Meets EN55032 Class B
- Continuous Short Circuit Protection
- PCB Mountable Type is Available

### 3. Electrical Block Diagram

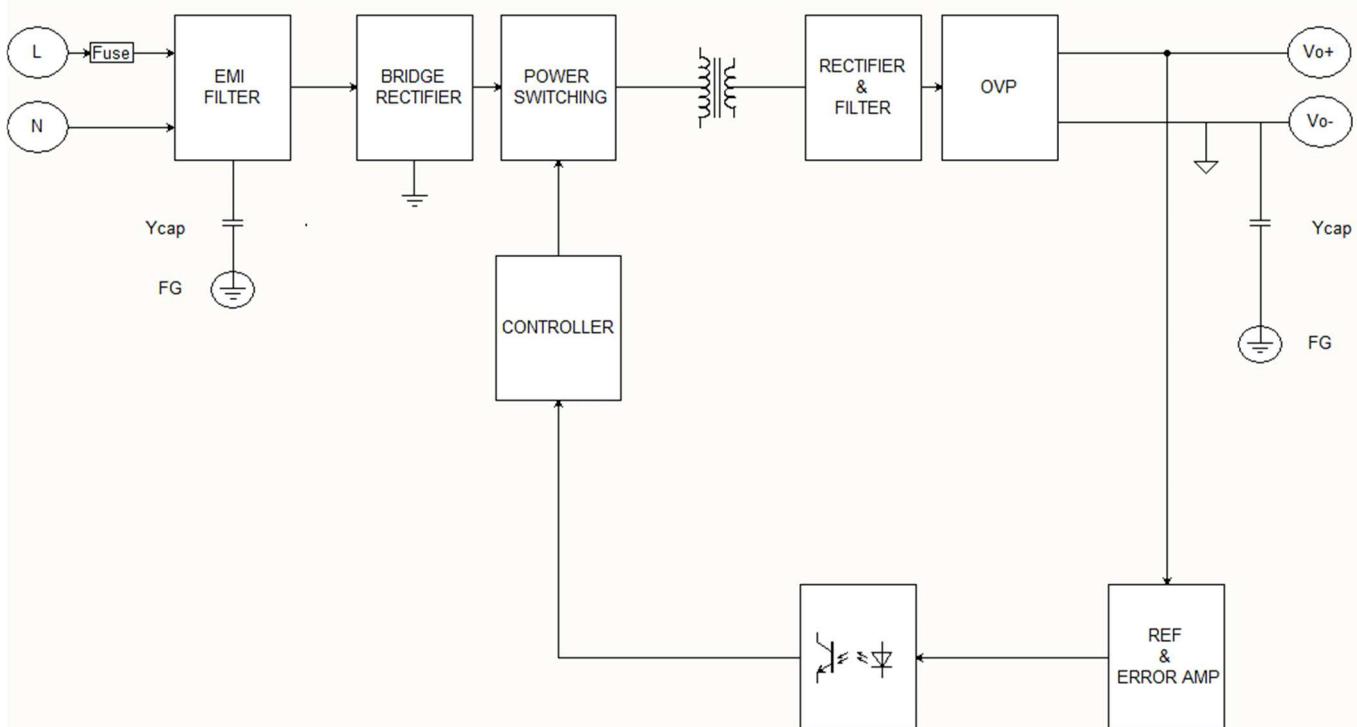



# CFM20 Series

## Application Note V10 February 2021

### 4. Technical Specifications

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

#### ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Input Voltage	Safety approvals only to the AC input	All	85 120		264 370	V <sub>ac</sub> V <sub>dc</sub>
Operating Temperature	See derating curve	All	0		+70	°C
Storage Temperature		All	-20		+85	°C
Input/Output Isolation Voltage		All	4242			V <sub>dc</sub>

#### INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Operating Voltage Range		All	100		240	V <sub>ac</sub>
Input Frequency Range		All	47		63	Hz
Maximum Input Current	100% Load, Vin=100V <sub>ac</sub>	All			0.5	A
Leakage Current	Vin=264V <sub>ac</sub> , 60Hz	All			3.5	mA
Inrush Current	Vin=230V <sub>ac</sub> , Cold start at 25°C	All			40	A

#### OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Output Voltage Set Point	Vin=Nominal Vin, Io=Io .max, Tc=25°C.	CFM2001S	4.95	5	5.05	V <sub>dc</sub>
		CFM2002S	11.88	12	12.12	
		CFM2003S	14.85	15	15.15	
		CFM2005S	23.76	24	24.24	
		CFM2007S	3.26	3.3	3.33	
		CFM2009S	8.91	9	9.09	
Operating Output Current Range		CFM2001S			4400	mA
		CFM2002S			1800	
		CFM2003S			1400	
		CFM2005S			920	
		CFM2007S			4400	
		CFM2009S			2450	
Holdup Time	Vin=115V <sub>ac</sub>	All		16		ms
Output Voltage Regulation						
Load Regulation	10% Load to full load	All			±1.0	%
Line Regulation	Vin=High line to low line	All			±0.5	%
Over Voltage Protection	Uses a TVS component to clamp output voltage	CFM2001S		6.8		V <sub>dc</sub>
		CFM2002S		15		
		CFM2003S		18		
		CFM2005S		30		
		CFM2007S		6.8		
		CFM2009S		11		



# CFM20 Series

## Application Note V10 February 2021

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Output Ripple and Noise	1. Add a 0.1uF ceramic capacitor and a 10uF aluminum electrolytic capacitor to output. 2. Oscilloscope is 20MHz band width. 3. Ambient temperature=25°C	CFM2001S CFM2002S CFM2003S CFM2005S CFM2007S CFM2009S			50 120 150 240 50 90	mVp-p
Efficiency	1. Input voltage is 230V <sub>ac</sub> 2. Output is max. load	CFM2001S CFM2002S CFM2003S CFM2005S CFM2007S CFM2009S		72 79 80 81 66 76		%

### ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Input to Output	1 minute	All			4242	V <sub>dc</sub>
Isolation Resistance		All	100			MΩ

### FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Switching Frequency	Pout=max. rated power	All		67		kHz

### GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
MTBF	Io=100%; Ta=25°C per MIL-HDBK-217F	All	300			k hours
Weight		All		100		g
Safety	Class I, EN/IEC/UL 62368-1					
EMC Emission	EN55032, Class B, IEC61000-3-2:2014, IEC61000-3-3:2013					
Conducted disturbance	EN55032 Class B					
Radiated disturbance	EN55032 Class B					
Harmonic current emissions	IEC 61000-3-2:2014					
Voltage fluctuations & flicker	IEC 61000-3-3:2013					
EMC Immunity	IEC61000-4-2, 3, 4, 5, 6, 8, 11					
Radio-frequency, Continuous radiated disturbance	IEC 61000-4-3:2010					
Electrical fast transient (EFT)	IEC 61000-4-4:2012					
Surge	IEC 61000-4-5:2005					
Conducted disturbances, induced by RF fields	IEC 61000-4-6:2008					
Power frequency magnetic field	IEC 61000-4-8:2009					
Voltage dips	IEC 61000-4-11:2004					
Voltage interruptions	IEC 61000-4-11:2004					



# CFM20 Series

## Application Note V10 February 2021

### 5. Main Features and Functions

#### 5.1 Operating Temperature Range

The highly efficient design of Cincon's CFM20 series power modules has resulted in their ability to operate within ambient temperature environments from 0°C to 45°C.

Due consideration must be given to the de-rating curves when ascertaining the maximum power that can be drawn from the module. The maximum power which can be drawn is influenced by a number of factors, such as:

- Input voltage range
- Permissible Output load (per derating curve)

#### 5.2 Continuous Short Circuit Protection

The power modules provide full continuous short-circuit protection. The unit will automatically recover once the short circuit is removed.

### 6. EMC & Safety

#### ■ Emission and Immunity


EN55032 Class B EN61000-6-3, EN61000-3-2, EN61000-3-3 EN55024, EN61204-3, EN61000-6-1

#### ■ Safety

IEC/EN/UL 62368-1

### 7. Applications

#### 7.1 Power De-Rating Curve

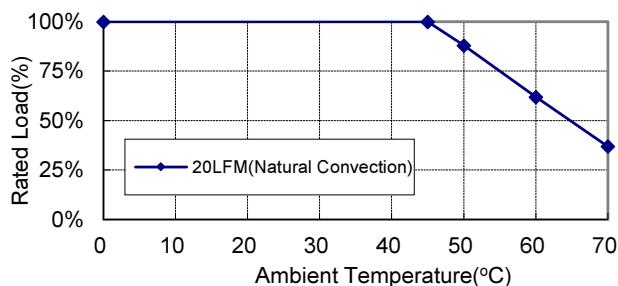

#### 7.2 Test Set-Up

The basic test set-up to measure parameters such as efficiency and load regulation is shown in Figure 1. When testing the Cincon's CFM20 series under any transient conditions, please ensure that the transient response of the source is sufficient to power the equipment under test. We can calculate the

- Efficiency
- Load regulation and line regulation.

The value of efficiency is defined as:

$$\eta = \frac{V_o \times I_o}{P_{in}} \times 100\%$$

Where:

$V_o$  is output voltage

$I_o$  is output current

$P_{in}$  is input power

The value of load regulation is defined as:

$$\text{Load reg.} = \frac{V_{FL} - V_{NL}}{V_{NL}} \times 100\%$$

Where:

$V_{FL}$  is the output voltage at full load

$V_{NL}$  is the output voltage at 10% load

The value of line regulation is defined as:

$$\text{Line reg.} = \frac{V_{HL} - V_{LL}}{V_{LL}} \times 100\%$$

Where:

$V_{HL}$  is the output voltage of maximum input voltage at full load.

$V_{LL}$  is the output voltage of minimum input voltage at full load.

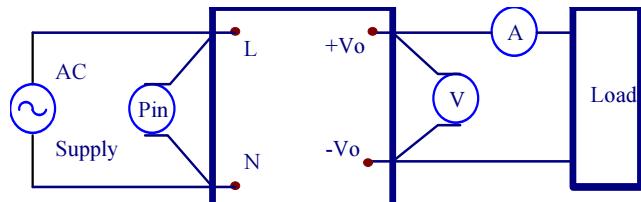


Figure 1. CFM20 Series Test Setup

#### 7.3 Output Ripple and Noise Measurement

The test set-up for noise and ripple measurements is shown in Figure 2. Measured method:

Add a  $C_2=0.1\mu F$  ceramic capacitor and a  $C_1=10\mu F$  electrolytic capacitor to output at 20 MHz Band Width.

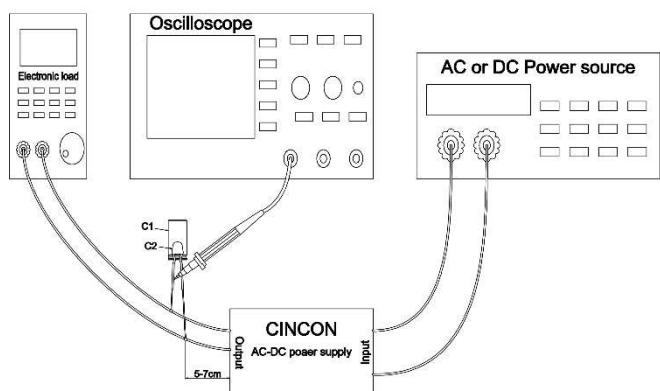


Figure 2. Output Voltage Ripple and Noise Measurement Set-Up




# CFM20 Series

## Application Note V10 February 2021


### 7.4 Installation Instruction

Please use the mounting hold as:


CFM20series: 4 holds of  $\varphi 3.18$  and insert the spacer (Max $\varphi 6$ ) of height over 8mm to lift the unit. The vibration spec. is the value take when the unit is raised by 8mm spacers

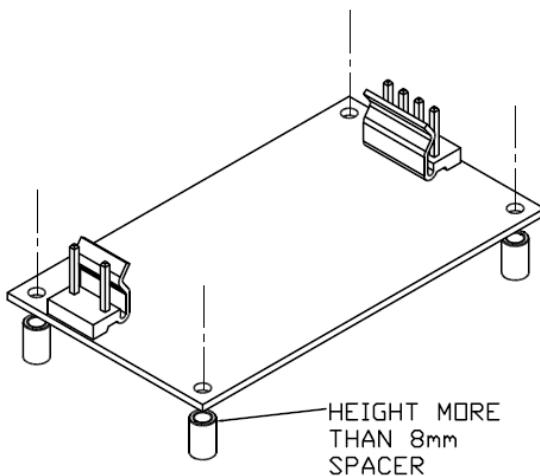

Please reserve 4mm space from the surfaces and the sides of PCB, especially from the solder surface, 8mm space is necessary. If the space is not enough, the specification of insulation and withstand will not be satisfied.

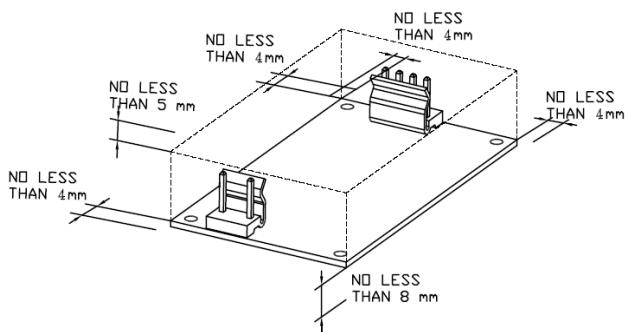

FG should be connected to the earth terminal of the apparatus. If not, the conducted noise and output noise will increase.

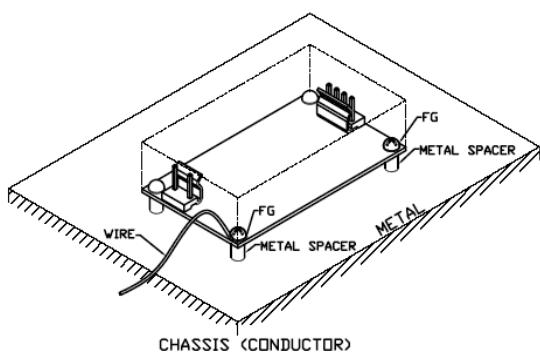




# CFM20 Series

## Application Note V10 February 2021

## 8. Part Number


**CFM 20 XX S** → S : Single Output

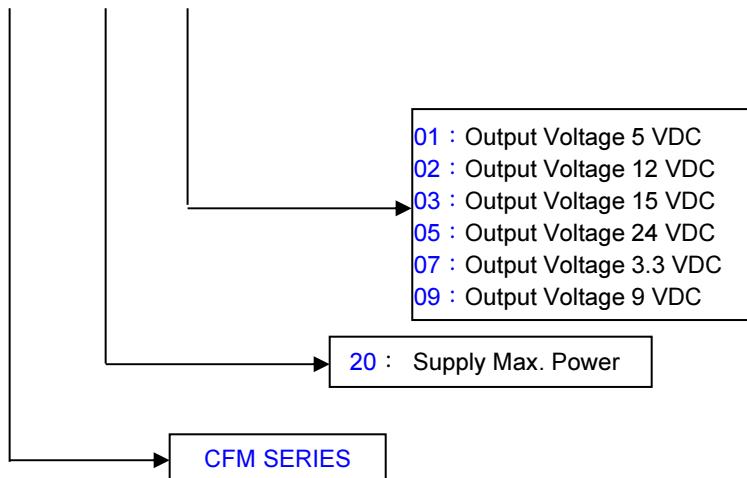

## 9. Mechanical Outline Diagrams and Packing Information

## 9.1. Mechanical Outline Diagrams

## CFM20XXS Series

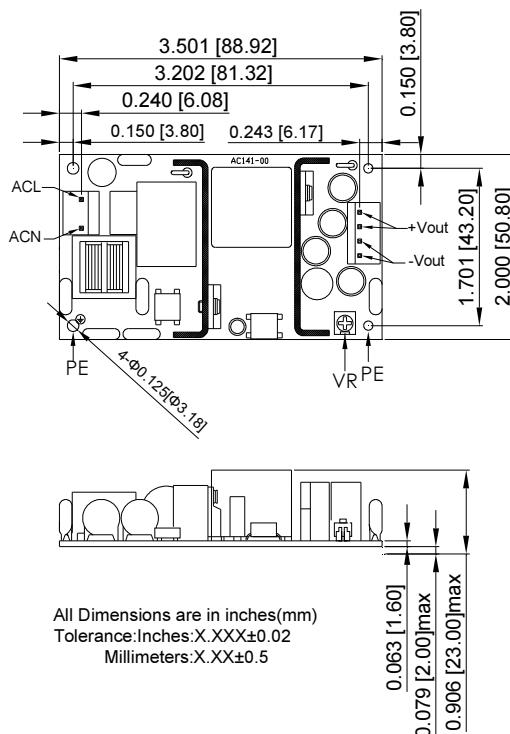

CFM20XXS-P Series

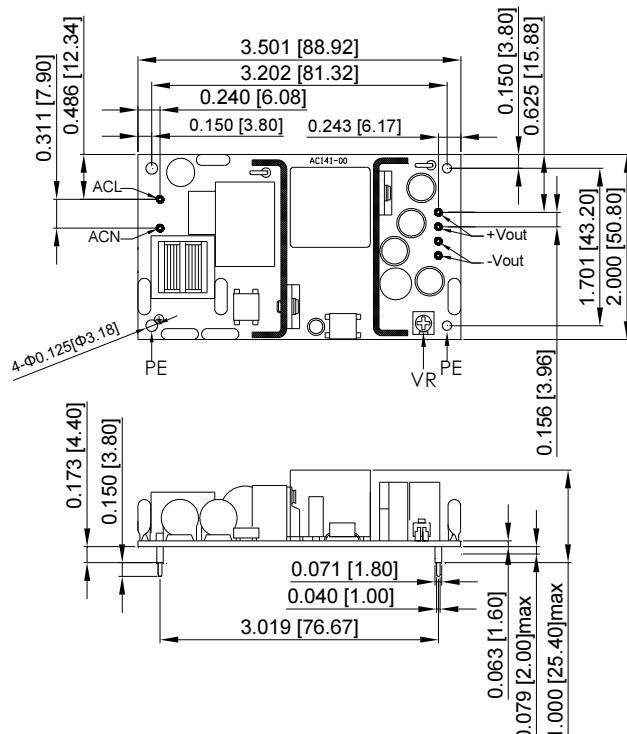


Figure 3. CFM20 series Mechanical Outline Diagram




# CFM20 Series

## Application Note V10 February 2021

### 9.2. Packing Information

The packing information for CFM20 series is showing as follows:

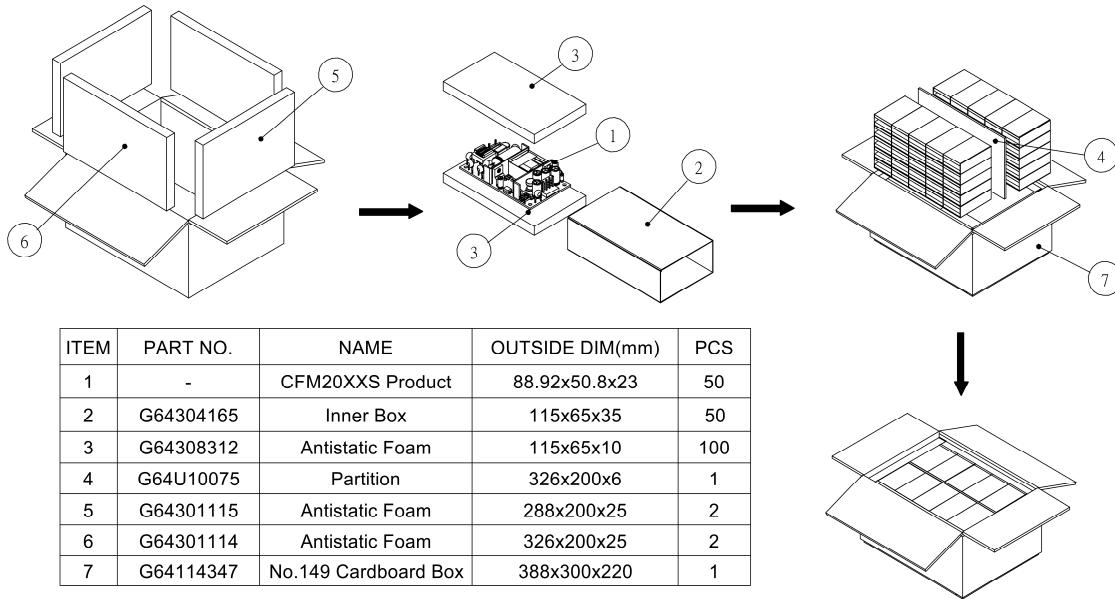

Each Box Packaging 50 PCS Products  
Gross weight Ref. 7 Kg

CFM20 50Pcs a box, including the total weight of package material about 7Kg

**CINCON ELECTRONICS CO., LTD.**

**Headquarters:**

14F, No.306, Sec.4, Hsin Yi Rd.  
Taipei, Taiwan  
Tel: 886-2-27086210  
Fax: 886-2-27029852  
E-mail: [support@cincon.com.tw](mailto:support@cincon.com.tw)  
Web Site: <http://www.cincon.com>

**Factory:**

No. 8-1, Fu Kung Rd.  
Fu Hsing Industrial Park  
Fu Hsing Hsiang,  
Chang Hua Hsien, Taiwan  
Tel: 886-4-7690261  
Fax: 886-4-7698031

**Cincon North America:**

1655 Mesa Verde Ave. Ste  
180  
Ventura, CA 93003  
Tel: 805-639-3350  
Fax: 805-639-4101  
E-mail: [info@cincon.com](mailto:info@cincon.com)