


NAiS

FLATPACK RELAY

NF-RELAYS

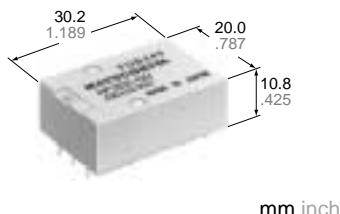

## FEATURES

1. Flatpack
2. Long seller

## SPECIFICATIONS

## Contacts

Arrangement <sup>1)</sup>		2 Form C, 4 Form C
Initial contact resistance (By voltage drop 6 V DC 1 A)	Max.	50 mOhm
	Typical	25 mOhm
Contact material	Movable contact	Gold-clad silver
	Stationary contact	Gold-clad silver
Rating, (resistive load)	Max. switching power	60 W 100 VA
	Max. switching voltage	220 V AC, DC
	Max. switching current	2 A
Expected life (min. operations)	Mechanical	10 <sup>8</sup>
	Electrical (Resistive)	2 A 30 V DC      2 x 10 <sup>5</sup>
		1 A 30 V DC      10 <sup>6</sup>
		0.5 A 30 V DC      10 <sup>7</sup>

<sup>1)</sup> MBB types available: 2MBB & 4MBB  
(See next page for contact positions.)

## Coil

Nominal operating power, at 25°C	2C	Approx. 300 mW
	4C	Approx. 480 mW
Max. operating power for continuous duty		Approx. 1 W at 40°C 104°F

## Remarks

- \* Specifications will vary with foreign standards certification ratings.
- \*<sup>1</sup> Measurement at same location as "Initial breakdown voltage" section
- \*<sup>2</sup> Detection current: 10 mA
- \*<sup>3</sup> Excluding contact bounce time
- \*<sup>4</sup> Half-wave pulse of sine wave: 11ms; detection time: 10µs
- \*<sup>5</sup> Half-wave pulse of sine wave: 6ms
- \*<sup>6</sup> Detection time: 10µs
- \*<sup>7</sup> Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 61).

## Characteristics (at 25°C 77°F, 50% R.H. seal level)

Max. operating speed	50 cps
Initial insulation resistance <sup>1)</sup>	1,000 MOhm at 500 V DC
Electrostatic capacitance	Contact/Contact      Approx. 4 pF Contact/Coil      Approx. 7 pF Contact/Ground      Approx. 6 pF
Initial breakdown voltage <sup>2)</sup>	Between open contacts      750 Vrms Between contact sets      1,000 Vrms Between live parts and ground      1,000 Vrms Between contacts and coil      1,000 Vrms
Operate time <sup>3)</sup> (at nominal voltage)	Max. 15 ms (Approx. 10 ms)
Release time (without diode) <sup>4)</sup> (at nominal voltage)	Max. 10 ms (Approx. 3 ms)
Contact bounce	Approx. 1.5 ms
Shock resistance	In de-energized condition      Min. 29.4 m/s <sup>2</sup> {3 G} (In contact direction) Min. 98 m/s <sup>2</sup> {10 G} (perpendicular to contact) In energized condition      Min. 196 m/s <sup>2</sup> {20 G} Destructive <sup>5)</sup> Min. 980 m/s <sup>2</sup> {100 G}
Vibration resistance	In de-energized condition      29.4 m/s <sup>2</sup> {3 G}, 10 to 55 Hz at double amplitude of 0.5 mm (in contact direction) 98 m/s <sup>2</sup> {10 G} 10 to 55 Hz at double amplitude of 1.6 mm (perpendicular to contact) In energized condition      117.6 m/s <sup>2</sup> {12 G} 10 to 55 Hz at double amplitude of 2 mm Destructive      196 m/s <sup>2</sup> {20 G}, 10 to 55 Hz at double amplitude of 3.3 mm
Conditions for operation, transport and storage <sup>6)</sup> (Not freezing and condensing at low temperature)	Ambient temp.      -40°C to + 65°C -40°F to +149°F Humidity      5 to 85%R.H.
Unit weight	2C      Approx. 14 g .49 oz 4C      Approx. 15.5 g .55 oz


## TYPICAL APPLICATIONS

NF relays are widely acceptable in applications where small size and high sensitivity are required.

Such applications include: Electronic equipment, Household applications,

Alarm systems, Office machines, Communication equipment, Measuring equipment, Remote control systems, General control circuits, Machine tools, Industrial machinery, etc.

## ORDERING INFORMATION

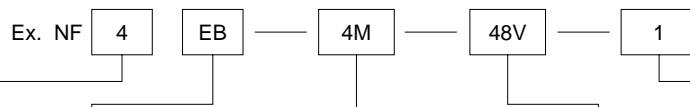

Contact arrangement	Type classification	MBB function	Coil voltage (DC)	Contact material
2: 2 Form C 4: 4 Form C	EB: Standard	Nil: Form C type 2M: 2MBB (2 Form D) 4M: 4MBB (4 Form D)	5, 6, 12, 24, 48 V	Nil: Gold-clad silver 1: Gold-cap over silver palladium

(Notes) 1. For VDE recognized types, add suffix VDE.

2. For UL/CSA recognized type, add suffix-A, as NF2EB-12V-A whose ground terminal is cut off.

3. Standard packing Carton: 20 pcs.; Case: 200 pcs.

## TYPES AND COIL DATA (at 25°C 77°F)

\*Less than 1,000 W: ±10%


\*More than 1,000 W: ±15%

Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Max. allowable voltage, V DC (at 40°C)	Coil resistance, * Ohm	Nominal operating power, mW	Inductance, H	
							Open	Close
NF2EB-5V	5	4.0	0.5	8.7	90	278	0.071	0.071
NF2EB-6V	6	4.8	0.6	10.5	137	260	0.093	0.094
NF2EB-12V	12	9.6	1.2	21	500	290	0.338	0.344
NF2EB-24V	24	19.2	2.4	42	2,000	290	1.29	1.31
NF2EB-48V	48	38.4	4.8	84	7,000	330	4.12	4.18
NF4EB-5V	5	4.0	0.5	7	53	472	0.029	0.029
NF4EB-6V	6	4.8	0.6	8.5	90	400	0.070	0.071
NF4EB-12V	12	9.6	1.2	17.0	330	440	0.22	0.23
NF4EB-24V	24	19.2	2.4	34	1,200	480	0.77	0.79
NF4EB-48V	48	38.4	4.8	68	4,200	550	2.22	2.25


## DIMENSIONS

mm inch

### 2 Form C

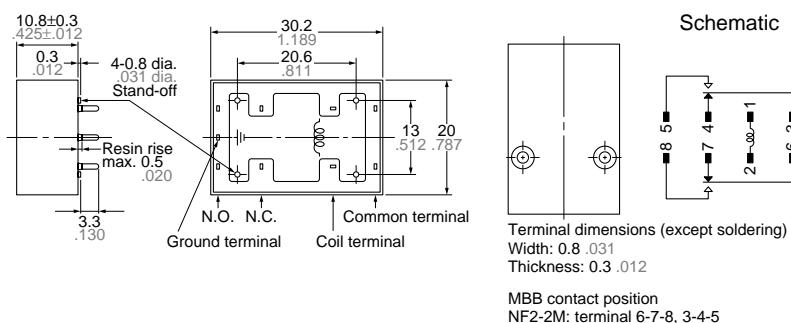


### 4 Form C

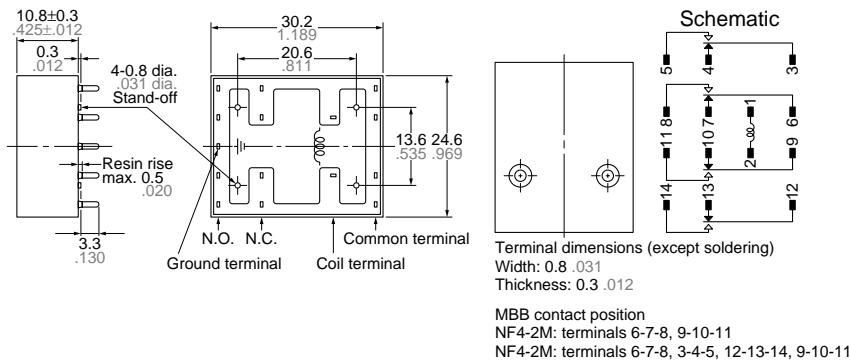


General tolerance: ±0.5 ±.020  
 (Except for the cover height)

## REFERENCE DATA


## 1. Life curve

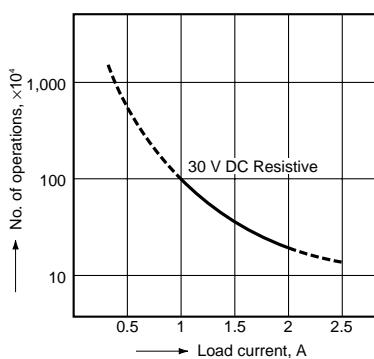

## 2. Coil temperature rise (resistance method)

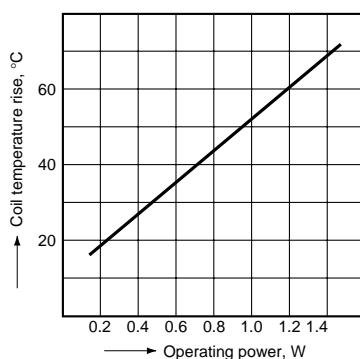


## 3. H2S gas test

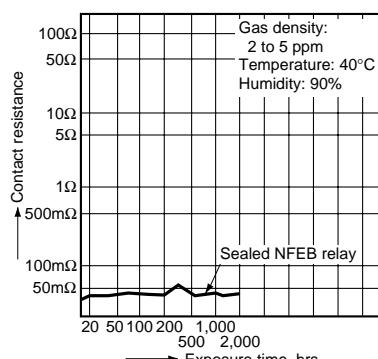

## 4. Contact reliability

## Test conditions:

1. Contact current/voltage: 10  $\mu$ A 100 mV 1 kHz
2. Cycle rate 20 cps.
3. Miscontact detection level: 1 mW (= 100 Ohm)
4. Detection method: Observation of all changeover contacts

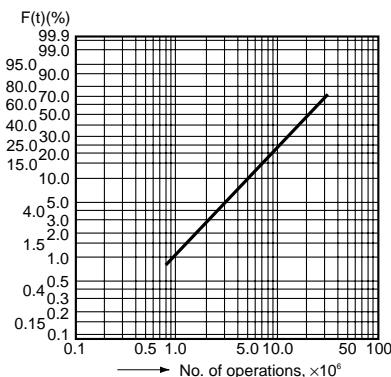


## 5. High temperature test

## Test conditions:

Ambient temperature: 80°C  $\pm 2^\circ$ C

## Test method:

1. All contacts were switched for 100 operations on 2 A 30 V DC resistive load.
2. Samples then were exposed to 80°C temperature for 5,000 hours, continuous
3. Contact resistance was measured with Hewlett-Packard testing equipment.

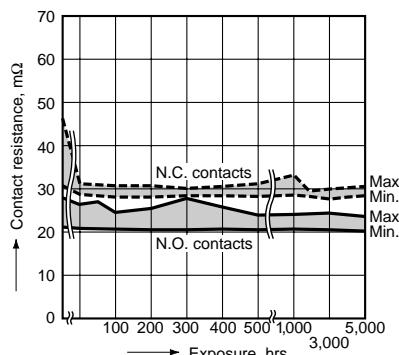

## Test result:

$$m = 1.5$$

$$m = 21.2 \times 10^6$$

$$95\% \text{ confidence level} = 3.1 \times 10^6$$

17 contacts out of 20 achieved 10 million no miscontact operations.

## Test result:

Amber relays showed a stable spread of contact resistance within the initially specified 50 mW after 5,000 hours exposure.

## NOTES

## 1. Prevention of vibration and shock

To reduce the likelihood of vibration and shock, we recommend that you install so that the contact action is not in the direction of gravity.

