

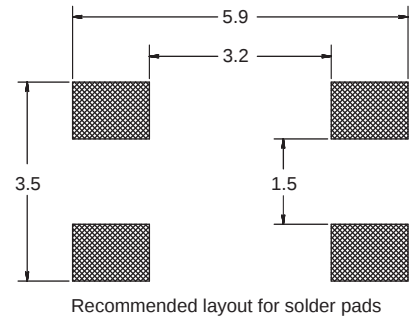
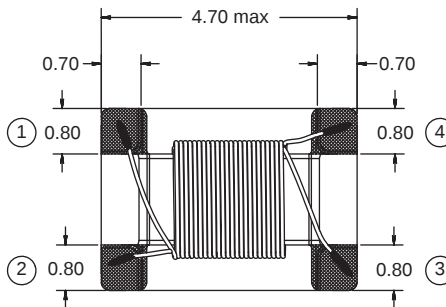

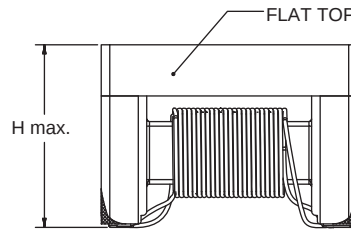

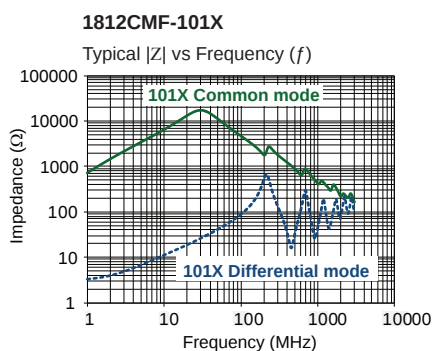
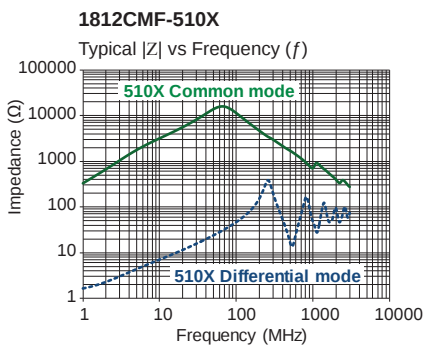
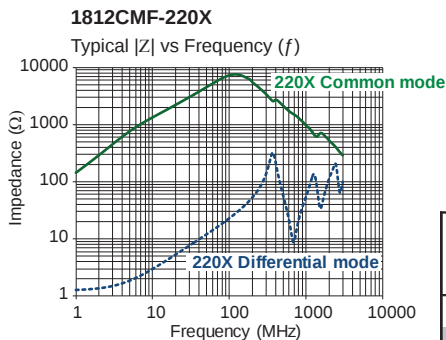


1812 CMF

Common Mode Filter
CAN bus

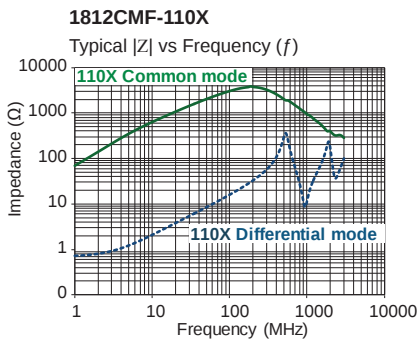

Schematic

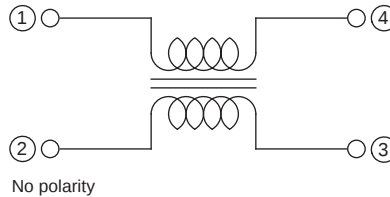

Part No	Impedance Z (Ω)		f _Z (MHz)	Inductance L (μH)		Tol ± (%)	f _L (kHz)	Leakage Inductance (μH) typ	DCR max (Ω)	Rated DC Current (mA)	Dimension H max
	min	typ		L (μH)	± (%)						
1812CMF-110X-YY	300	600	10	11	+50/-30	100	100	0.05	0.5	250	3.15
1812CMF-220X-YY	500	1200	10	22	+50/-30	100	100	0.08	0.7	200	3.15
1812CMF-510X-YY	1000	2800	10	51	+50/-30	100	100	0.15	0.9	200	3.15
1812CMF-101X-YY	2000	5800	10	100	+50/-30	100	100	0.20	2.0	150	3.25

Core Material : Ferrite

Top Material : Magnetically shielded

SPQ : Taped / Reel 600 [-01]
2200 [-04]

Remarks: - Unlisted inductance values available upon request.
- Rated Volt = 50 Vdc.
- Insulation Resistance = 10 MΩ min.

Revision date : 03 Jun 2021