

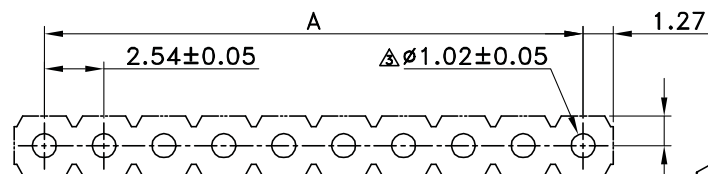

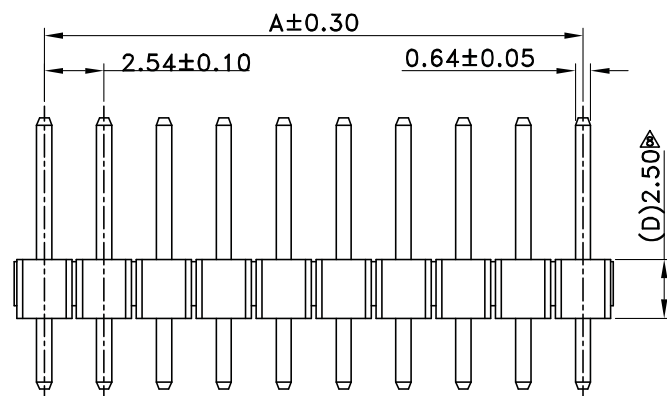


0.1" SINGLE ROW HEADER 6PIN STRAIGHT

Date	Rev.	Description



Recommended PCB Layout

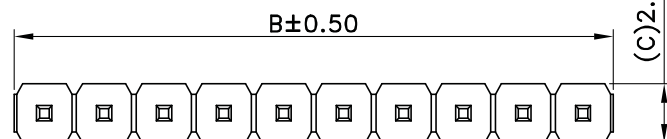

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
1	2.54	2.54	21	50.80	53.34
2	2.54	5.08	22	53.34	55.88
3	5.08	7.62	23	55.88	58.42
4	7.62	10.16	24	58.42	60.96
5	10.16	12.70	25	60.96	63.50
6	12.70	15.24	26	63.50	66.04
7	15.24	17.78	27	66.04	68.58
8	17.78	20.32	28	68.58	71.12
9	20.32	22.86	29	71.12	73.66
10	22.86	25.40	30	73.66	76.20
11	25.40	27.94	31	76.20	78.74
12	27.94	30.48	32	78.74	81.28
13	30.48	33.02	33	81.28	83.82
14	33.02	35.56	34	83.82	86.36
15	35.56	38.10	35	86.36	88.90
16	38.10	40.64	36	88.90	91.44
17	40.64	43.18	37	91.44	93.98
18	43.18	45.72	38	93.98	96.52
19	45.72	48.26	39	96.52	99.06
20	48.26	50.80	40	99.06	101.60

■ SPECIFICATIONS ▲

- Current Rating : 3A AC/DC
- Voltage Rating : 125V AC/DC
- Withstanding Voltage : 1000V AC/minute
- Insulation Resistance : 1000M Ω min.
- Temperature Range : 1.PBT : -25°C to +85°C
2.NY 6T : -40°C to +105°C ▲

- Contact Resistance : 20m Ω max.

■ PIN HEADER

- Part No. : JS-1109-XX(XXXX XX)

Product Code ① ② ③

① Poles No: 01~40 ▲

② Base: Blank:PBT;Color:Black ▲

6T:Nylon 6T UL94V-0;Color:Black

6TNH:Nylon6T-66 UL94V-0;Non-Halogen;Color:Black ▲

③ Contact Plated: Blank:Gold Plated

T:TIN over NICKEL ▲

M: No plated ▲

- Material : 1. Contact : Brass

2. Base : Refer the above options

- Q'ty: Bag ▲

GOLDSUN ELECTRONICS CO., LTD.

PART NO. 153700

Rev. 1

Description :

UNIT
mm

SCALE

SHEET 1 OF 1

CAS No:
ERN No:

DRAWN : Jay

VERIFY : Arthur / Sam

DCC. NO.

A4 DRAWING NO.