




Rating	3A 125V,1A 250V AC 	Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	0°C ~ 55°C		
Switch Function	2P SPST OFF-(ON)		

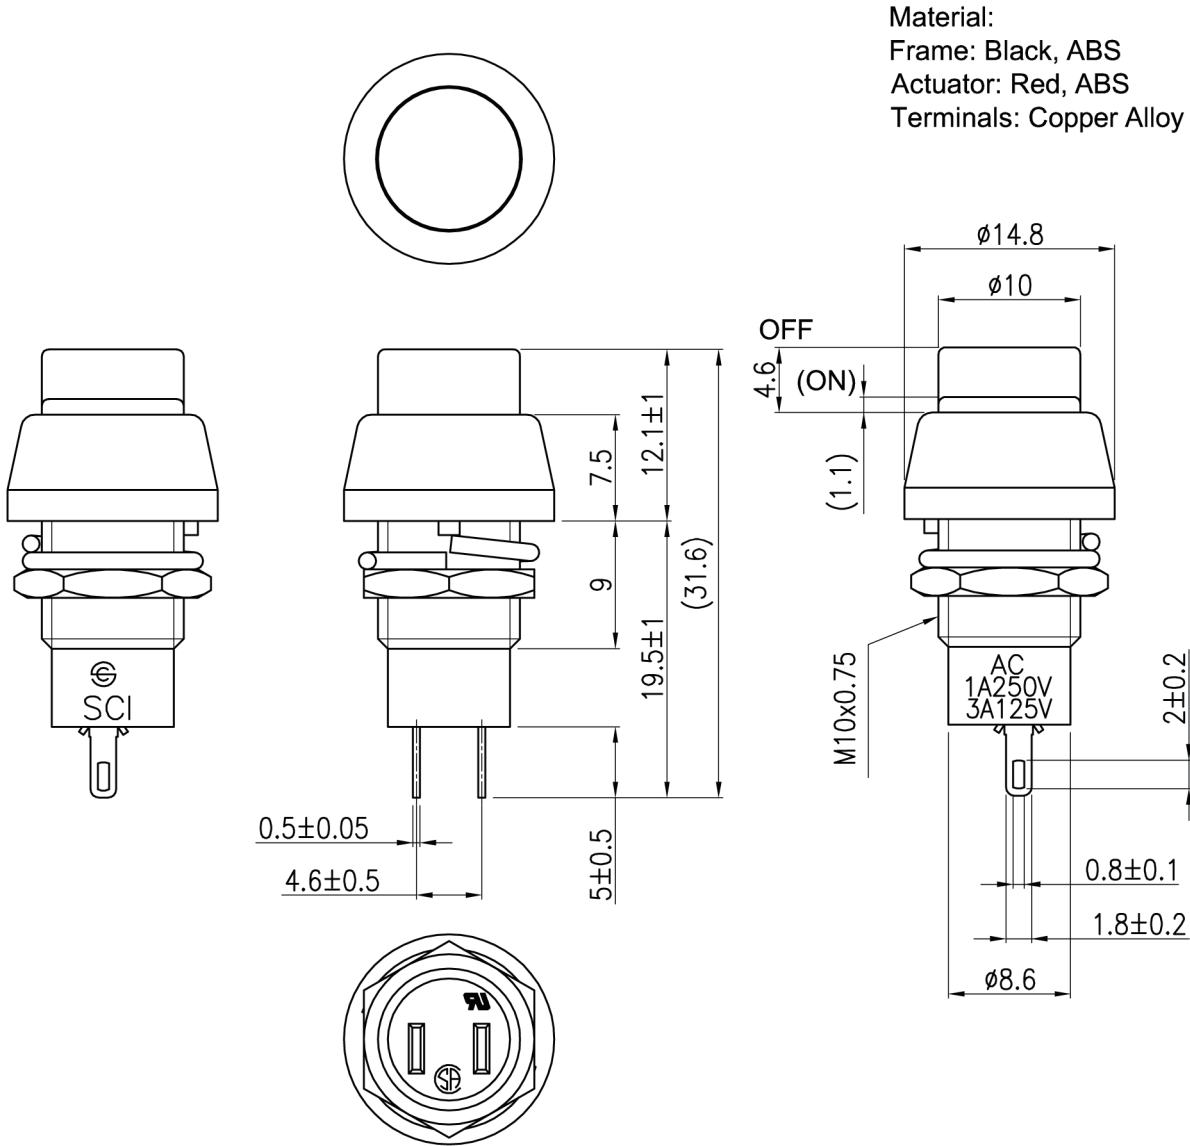

1、Tolerances Unless Otherwise Specified ±0.3

GOLDSUN ELECTRONICS CO., LTD.			
JAMECO NO. 164486	GOLDSUN NO. R13-84A		
Description SWITCH,PB,SPST,OFF-(ON),RED			Rev. 1
UNIT: mm	SCALE:	SHEET 1 OF 1	CAS No: ERN No: