

2319



QJT MOTOR



QJT-260-18130-G2322

SHENZHEN QIJINTAI MOTOR TECHNOLOGY CO., LTD.

TEL: (+86-755) 83980008 FAX: 83981008

Http://www.qijintai.com

DIRECTION OF ROTATION

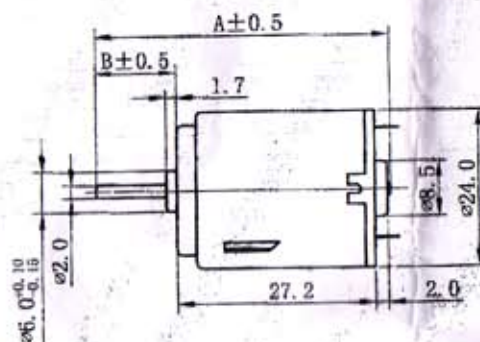

NOTES:

1. LENGTH OF SHAFT DIM "A" IS: 38.0 mm.
2. FRONT EXTENSION DIM "B" IS: 8.0 mm.
MEASURED WITH SHAFT PUSHED TO PLASTIC END CAP.
3. END PLAY 0.05-0.40 mm.
4. DIRECTION OF ROTATION: CLOCKWISE WHEN VIEWING MOTOR OUTPUT END WITH POSITIVE VOLTAGE APPLIED TO POSITIVE TERMINAL.

TEST CONDITION :

1. RATED VOLTAGE: 3.0VDC
2. OPERATING TEMPERATURE RANGE: -10° C—60° C
3. OPERATION 30'S INSPECTION

AT NO LOAD :


1. CURRENT: 0.12A Max
2. SPEED: 6100±10%rpm

AT MAXIMUM EFFICIENCY :

1. CURRENT: 0.46A
2. OUTPUT: 0.49W
3. SPEED: 4780±10%rpm
4. TORQUE: 10.0g.cm

AT STALL :

1. CURRENT: 1.59A
2. TORQUE: 46.0g.cm

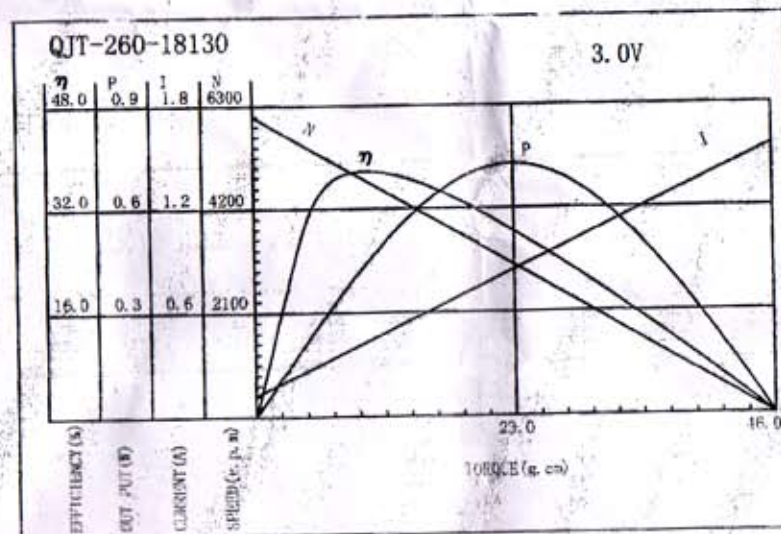

NG: G2322

DRAW BY

常春松

CHECKED BY

杨 琴

APPROVED BY

徐 乙 新

DATE

24/04/2008

1