

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 1952978



■ Features :

- Universal AC input/Full range
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- NEC class 2 / LPS compliant
- Built in DC OK active signal
- LED indicator for power on
- No load power consumption<0.75W
- 100% full load burn-in test
- 3 years warranty




SPECIFICATION


MODEL		MDR-10-5	MDR-10-12	MDR-10-15	MDR-10-24
OUTPUT	DC VOLTAGE	5V	12V	15V	24V
	RATED CURRENT	2A	0.84A	0.67A	0.42A
	CURRENT RANGE	0 ~ 2A	0 ~ 0.84A	0 ~ 0.67A	0 ~ 0.42A
	RATED POWER	10W	10W	10W	10W
	RIPPLE & NOISE (max.) Note.2	80mVp-p	120mVp-p	120mVp-p	150mVp-p
	VOLTAGE TOLERANCE Note.3	±5.0%	±3.0%	±3.0%	±2.0%
	LINE REGULATION	±1.0%	±1.0%	±1.0%	±1.0%
	LOAD REGULATION	±5.0%	±3.0%	±3.0%	±2.0%
	SETUP, RISE TIME Note.5	500ms, 30ms/230VAC 1000ms, 30ms/115VAC at full load			
HOLD UP TIME (Typ.)	120ms/230VAC 25ms/115VAC at full load				
INPUT	VOLTAGE RANGE	85 ~ 264VAC 120 ~ 370VDC			
	FREQUENCY RANGE	47 ~ 63Hz			
	EFFICIENCY (Typ.)	77%	81%	81%	84%
	AC CURRENT (Typ.)	0.33A/115VAC 0.21A/230VAC			
	INRUSH CURRENT (Typ.)	COLD START 35A/115VAC 70A/230VAC			
	LEAKAGE CURRENT	<1mA / 240VAC			
PROTECTION	OVERLOAD	Above 105% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed			
	OVER VOLTAGE	5.75 ~ 6.75V	13.8 ~ 16.2V	17.25 ~ 20.25V	27.6 ~ 32.4V
		Protection type : Shut down o/p voltage, re-power on to recover			
FUNCTION	DC OK ACTIVE SIGNAL (max.)	3.75 ~ 6V / 50mA	9 ~ 13.5V / 40mA	11.5 ~ 16.5V / 40mA	18 ~ 27V / 20mA
ENVIRONMENT	WORKING TEMP.	-20 ~ +70℃ (Refer to output load derating curve)			
	WORKING HUMIDITY	20 ~ 90% RH non-condensing			
	STORAGE TEMP., HUMIDITY	-40 ~ +85℃, 10 ~ 95% RH			
	TEMP. COEFFICIENT	±0.03%/℃ (0 ~ 50℃)			
	VIBRATION	Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6			
SAFETY & EMC (Note 4)	SAFETY STANDARDS	UL508, TUV EN60950-1 approved, NEC class 2 / LPS compliant			
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC			
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC			
	EMI CONDUCTION & RADIATION	Compliance to EN55011,EN55022 (CISPR22), EN61204-3 Class B			
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3			
	EMS IMMUNITY	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11, ENV50204, EN55024,EN61000-6-1,EN61204-3, light industry level, criteria A			
OTHERS	MTBF	584K hrs min. MIL-HDBK-217F (25℃)			
	DIMENSION	22.5*90*100mm (W*H*D)			
	PACKING	0.17Kg; 72pcs/13.2Kg/0.91CUFT			
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. 5. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.				

Mechanical Specification

Case No. 956 Unit:mm

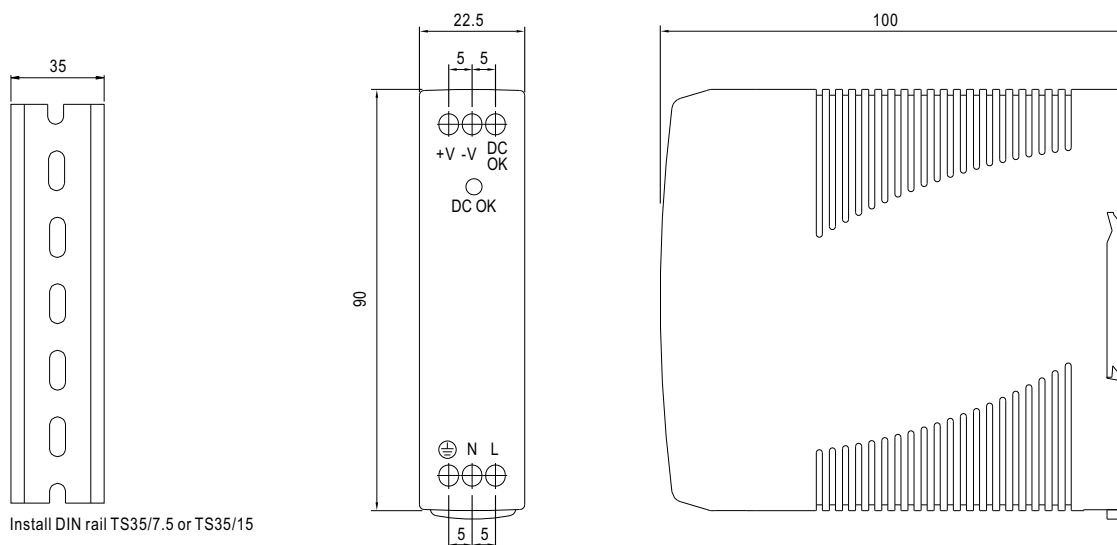


Block Diagram

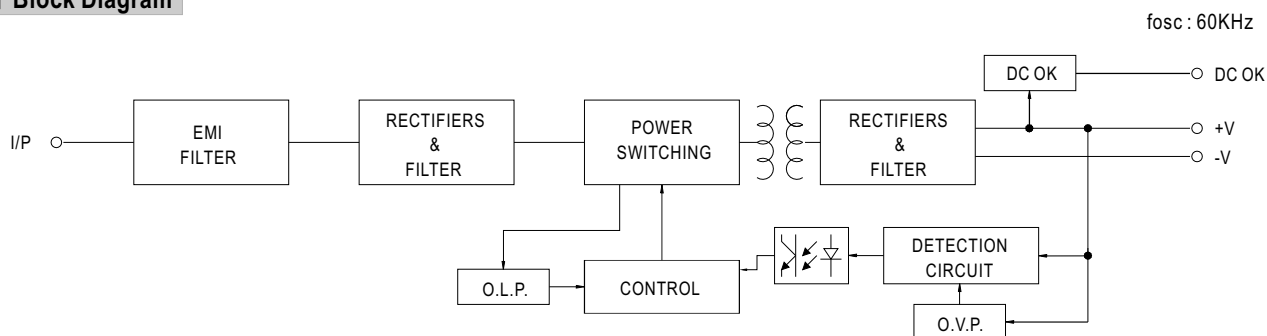


Application of DC OK Active Signal


(a) 5V signal

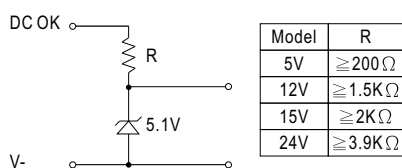


(b) LED




(c) Relay

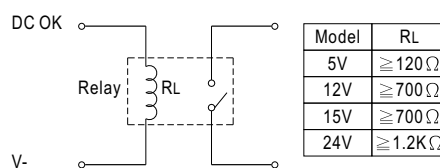

Derating Curve

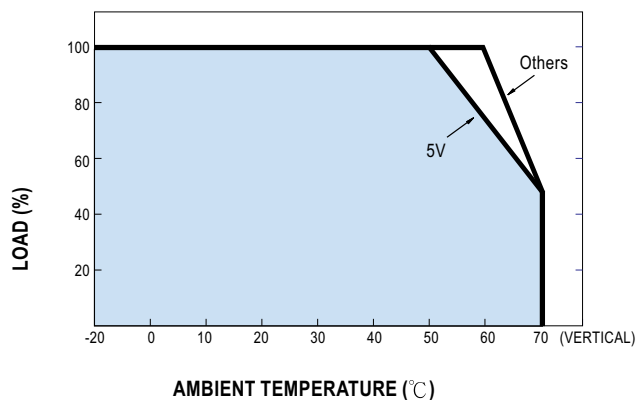

Output Derating VS Input Voltage

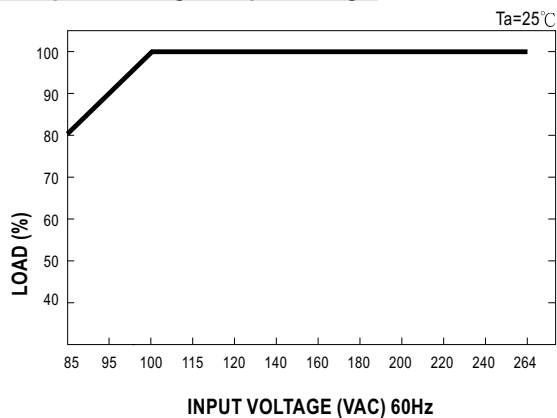

MODEL : MDR-10-12

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	RIPPLE & NOISE	V1: 120 mVp-p (Max)	I/P: 230VAC O/P:FULL LOAD Ta:25°C	V1: 6 mVp-p (Max)	P
2	OUTPUT VOLTAGE TOLERANCE	V1: 3 %~ -3 % (Max)	I/P: 100VAC / 264 VAC O/P:FULL/ MIN LOAD Ta:25°C	V1: 0.1 %~ -0.1 %	P
3	LINE REGULATION	V1: 1 %~ -1 % (Max)	I/P: 100VAC ~ 264 VAC O/P:FULL LOAD Ta:25°C	V1: 0.05 %~ -0.05 %	P
4	LOAD REGULATION	V1: 3%~ -3 % (Max)	I/P: 230 VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: 0.1 %~ -0.1 %	P
5	SET UP TIME	230VAC: 500 ms (Max) 115 VAC: 1000 ms (Max)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	230VAC/ 328 ms 115VAC/ 656 ms	P
6	RISE TIME	230VAC: 30 ms (Max) 115VAC: 30 ms (Max)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	230VAC/ 5.7 ms 115VAC/ 5.6 ms	P
7	HOLD UP TIME	230VAC: 50 ms (TYP) 115VAC: 20 ms (TYP)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	230VAC/ 137 ms 115VAC/ 31 ms	P
8	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	TEST: <5 %	P
9	DYNAMIC LOAD	V1: 1200 mVp-p	I/P: 230 VAC O/P:FULL /Min LOAD 90%DUTY/1KHZ Ta:25°C	166 mVp-p	P

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	INPUT VOLTAGE RANGE	85VAC~264 VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	51V~264V	P
			I/P: LOW-LINE-3V= 82 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD ON: 30 Sec . OFF: 30 Sec 10MIN (AC POWER ON/OFF NO DAMAGE)	TEST: OK	
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE OSC	I/P: 85 VAC ~ 264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK	P
3	EFFICIENCY	80 % (TYP)	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	80.46%	P
4	INPUT CURRENT	230V/ 0.21 A (TYP) 115V/ 0.33 A (TYP)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	I = 0.14 A/ 230 VAC I = 0.24 A/ 115 VAC	P
5	INRUSH CURRENT	230V/ 70 A (TYP) 115V/ 35 A(TYP) COLD START	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	I = 63 A/ 230 VAC I = 31 A/ 115 VAC	P
6	LEAKAGE CURRENT	< 1 mA / 240 VAC	I/P: 254 VAC O/P:Min LOAD Ta:25°C	L-FG: 0.63 mA N-FG: 0.62 mA	p

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	OVER LOAD PROTECTION	Above 105 %	I/P: 230 VAC I/P: 115 VAC O/P:TESTING Ta:25°C	203% / 230 VAC 150% / 115 VAC Hiccup mode	P
2	OVER VOLTAGE PROTECTION	CH1: 13.8 V~ 16.2 V	I/P: 230 VAC I/P: 115 VAC O/P:MIN LOAD Ta:25°C	15.3V/ 230 VAC 15.3V/ 115 VAC Shunt down Re- power ON	P
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264 VAC O/P:FULL LOAD Ta:25°C	NO DAMAGE Hiccup mode	p

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	NO LOAD POWER CON SUMPTION	<0.75W	I/P: 230 VAC I/P: 115 VAC O/P:NO LOAD Ta:25°C	230 VAC/ 0.53W 115 VAC/ 0.45W	p
2	DC OK ACTIVE SIGNAL (max)	9V~13.5V / 40mA	I/P: 230 VAC I/P: 115 VAC O/P: 50mA Ta:25°C	230 VAC/ 11.61V 115 VAC/ 11.61V	p

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT																																																																						
1	TEMPERATURE RISE TEST	MODEL : MDR-10-24 1. ROOM AMBIENT BURN-IN : 2HRS I/P: 230VAC O/P: FULL LOAD Ta=27.5℃ 2. HIGH AMBIENT BURN-IN : 18HRS I/P: 230VAC O/P: FULL LOAD Ta=57.7℃ <table><tr><th>NO</th><th>Position</th><th>P/N</th><th>ROOM AMBIENT Ta=27.5 °C</th><th>HIGH AMBIENT Ta=57.7 °C</th></tr><tr><td>1</td><td>U1</td><td>NCP1230</td><td>46.5℃</td><td>71.1℃</td></tr><tr><td>2</td><td>C5</td><td>33U/400V NCC 105℃ KMG</td><td>36.0℃</td><td>60.3℃</td></tr><tr><td>3</td><td>BD1</td><td>KBP208G 2A/800V LT</td><td>37.5℃</td><td>61.9℃</td></tr><tr><td>4</td><td>LF1</td><td>LF-562 LS</td><td>35.9℃</td><td>61.2℃</td></tr><tr><td>5</td><td>D1</td><td>1N4007GP 1A/1000V</td><td>44.3℃</td><td>68.6℃</td></tr><tr><td>6</td><td>Q1</td><td>K3562 6A/600V TOS</td><td>53.8℃</td><td>77.9℃</td></tr><tr><td>7</td><td>ZD1</td><td>P6KE150A LT</td><td>41.3℃</td><td>65.8℃</td></tr><tr><td>8</td><td>D100</td><td>F20LC30 20A/300V SHI</td><td>57.7℃</td><td>80.6℃</td></tr><tr><td>9</td><td>C36</td><td>100U/35V RUB 105℃ YXF</td><td>44.1℃</td><td>68.9℃</td></tr><tr><td>10</td><td>C105</td><td>100u/35V RUB 105℃ YXF</td><td>49.0℃</td><td>72.5℃</td></tr><tr><td>11</td><td>L100</td><td>DR-007D</td><td>45.2℃</td><td>69.4℃</td></tr><tr><td>12</td><td>D300</td><td>HER104 1A/300V REC</td><td>51.6℃</td><td>74.9℃</td></tr><tr><td>13</td><td>Q302</td><td>2SA1249 -1.5A/-160V</td><td>44.0℃</td><td>68.7℃</td></tr></table>			NO	Position	P/N	ROOM AMBIENT Ta=27.5 °C	HIGH AMBIENT Ta=57.7 °C	1	U1	NCP1230	46.5℃	71.1℃	2	C5	33U/400V NCC 105℃ KMG	36.0℃	60.3℃	3	BD1	KBP208G 2A/800V LT	37.5℃	61.9℃	4	LF1	LF-562 LS	35.9℃	61.2℃	5	D1	1N4007GP 1A/1000V	44.3℃	68.6℃	6	Q1	K3562 6A/600V TOS	53.8℃	77.9℃	7	ZD1	P6KE150A LT	41.3℃	65.8℃	8	D100	F20LC30 20A/300V SHI	57.7℃	80.6℃	9	C36	100U/35V RUB 105℃ YXF	44.1℃	68.9℃	10	C105	100u/35V RUB 105℃ YXF	49.0℃	72.5℃	11	L100	DR-007D	45.2℃	69.4℃	12	D300	HER104 1A/300V REC	51.6℃	74.9℃	13	Q302	2SA1249 -1.5A/-160V	44.0℃	68.7℃	P
NO	Position	P/N	ROOM AMBIENT Ta=27.5 °C	HIGH AMBIENT Ta=57.7 °C																																																																							
1	U1	NCP1230	46.5℃	71.1℃																																																																							
2	C5	33U/400V NCC 105℃ KMG	36.0℃	60.3℃																																																																							
3	BD1	KBP208G 2A/800V LT	37.5℃	61.9℃																																																																							
4	LF1	LF-562 LS	35.9℃	61.2℃																																																																							
5	D1	1N4007GP 1A/1000V	44.3℃	68.6℃																																																																							
6	Q1	K3562 6A/600V TOS	53.8℃	77.9℃																																																																							
7	ZD1	P6KE150A LT	41.3℃	65.8℃																																																																							
8	D100	F20LC30 20A/300V SHI	57.7℃	80.6℃																																																																							
9	C36	100U/35V RUB 105℃ YXF	44.1℃	68.9℃																																																																							
10	C105	100u/35V RUB 105℃ YXF	49.0℃	72.5℃																																																																							
11	L100	DR-007D	45.2℃	69.4℃																																																																							
12	D300	HER104 1A/300V REC	51.6℃	74.9℃																																																																							
13	Q302	2SA1249 -1.5A/-160V	44.0℃	68.7℃																																																																							
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P: 230 VAC O/P: 177% LOAD Ta:25℃	TEST : OK	P																																																																						
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 230 VAC O/P: 100% LOAD Ta= -20℃	TEST : OK	P																																																																						
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60℃ NO DAMAGE	I/P: 272 VAC O/P:FULL LOAD Ta= 60℃ HUMIDITY= 95 %R.H	TEST : OK	P																																																																						
5	TEMPERATURE COEFFICIENT	± 0.03 %(0~50℃)	I/P: 230 VAC O/P:FULL LOAD	± 0.005 %(0~50℃)	P																																																																						
6	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency:10~500Hz (3) Sweep Time:10min/sweep cycle (4) Acceleration:2G (5) Test Time:1 hour in each axis (X.Y.Z) (6) Ta:25℃		TEST : OK	P																																																																						

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	WITHSTAND VOLTAGE	I/P-O/P: 3 KVAC/min I/P-FG: 1.5 KVAC/min O/P-FG: 0.5 KVAC/min	I/P-O/P: 3.6 KVAC/min I/P-FG: 1.8 KVAC/min O/P-FG: 0.6 KVAC/min Ta:25°C	I/P-O/P: 3.57 mA I/P-FG: 4.56 mA O/P-FG: 2.165 mA NO DAMAGE	p
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 25.6 GΩ I/P-FG: 2.07 GΩ O/P-FG: 30 GΩ NO DAMAGE	p
3	APPROVAL	TUV: Certificate NO : UL: File NO : E215312			p

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	HARMONIC	EN61000-3-2 CLASS A	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS	p
2	CONDUCTION	EN55022 EN55011 EN61204-3 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL/50% LOAD Ta:25°C	PASS Test by certified Lab	p
3	RADIATION	EN55022 EN55011 EN61204-3 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab	p
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR:8KV / Contact:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A	p
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A	p
6	SURGE	IEC61000-4-5 LIGHT INDUSTRY L-N :1KV L,N-PE:2KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A	p
7	Test by certified Lab & Test Report Prepare				

M.T.B.F & LIFE CYCLE CALCULATION

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	CAPACITOR LIFE CYCLE	MDR-10-24 : SUPPOSE C105 IS THE MOST CRITICAL COMPONENT I/P: 230VAC O/P:FULL LOAD Ta= 25°C LIFE TIME=490972HRS I/P: 230VAC O/P:FULL LOAD Ta= 60°C LIFE TIME=69032 HRS			p
2	MTBF	MIL-HDBK-217F NOTICES2 PARTS COUNT TOTAL FAILURE RATE: 584KHRS			p

p

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	Power Transistor (D to S) or (C to E) Peak Voltage Diode Peak Voltage	Q 1 Rated 2SK2628LS 6A/600V	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on (2) Output Short Ta:25℃	(1) 548 V (2) 544 V	P
2	Clamp Diode Peak Voltage Power Transistor (D to S) or (C to E) Peak Voltage	D100 Rated BYQ28X-200 10A/200V	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on (2)Output Short Ta:25℃	(1) 118 V (2) 102 V	P
3	Diode Peak Voltage	D1 Rated 1A/1KV 1N4007GP	I/P:High-Line +3V = 267 V O/P: (1) Dynamic Load 90%Duty/1KHz Ta:25℃	(1) 512 V	P
4	Input Capacitor Voltage	C 5 Rated 33u/400V 105℃	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta:25℃	(1) 392 V (2) 394 V (3) 394 V	P
5	Control IC Voltage Test	U 1 Rated 1230D65R2G0: 18 V	I/P:High-Line +3V = 267 V O/P: (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta:25℃	(1) 12.011 V (2) 11.137 V (3) 12.011 V	P

DATE	SAMPLE	TEST RESULT	TESTER	APPROVAL
2008/2/22	RD SAMPLE	PASS	SANFODR SU	VINCENT TSENG
2008/4/29	PRODUCT SAMPLE W0803D94	PASS	SANFODR SU	VINCENT TSENG
2008/6/17	PRODUCT SAMPLE W0805B10	PASS	SANFODR SU	VINCENT TSENG

2003/12/12 A50-F023