


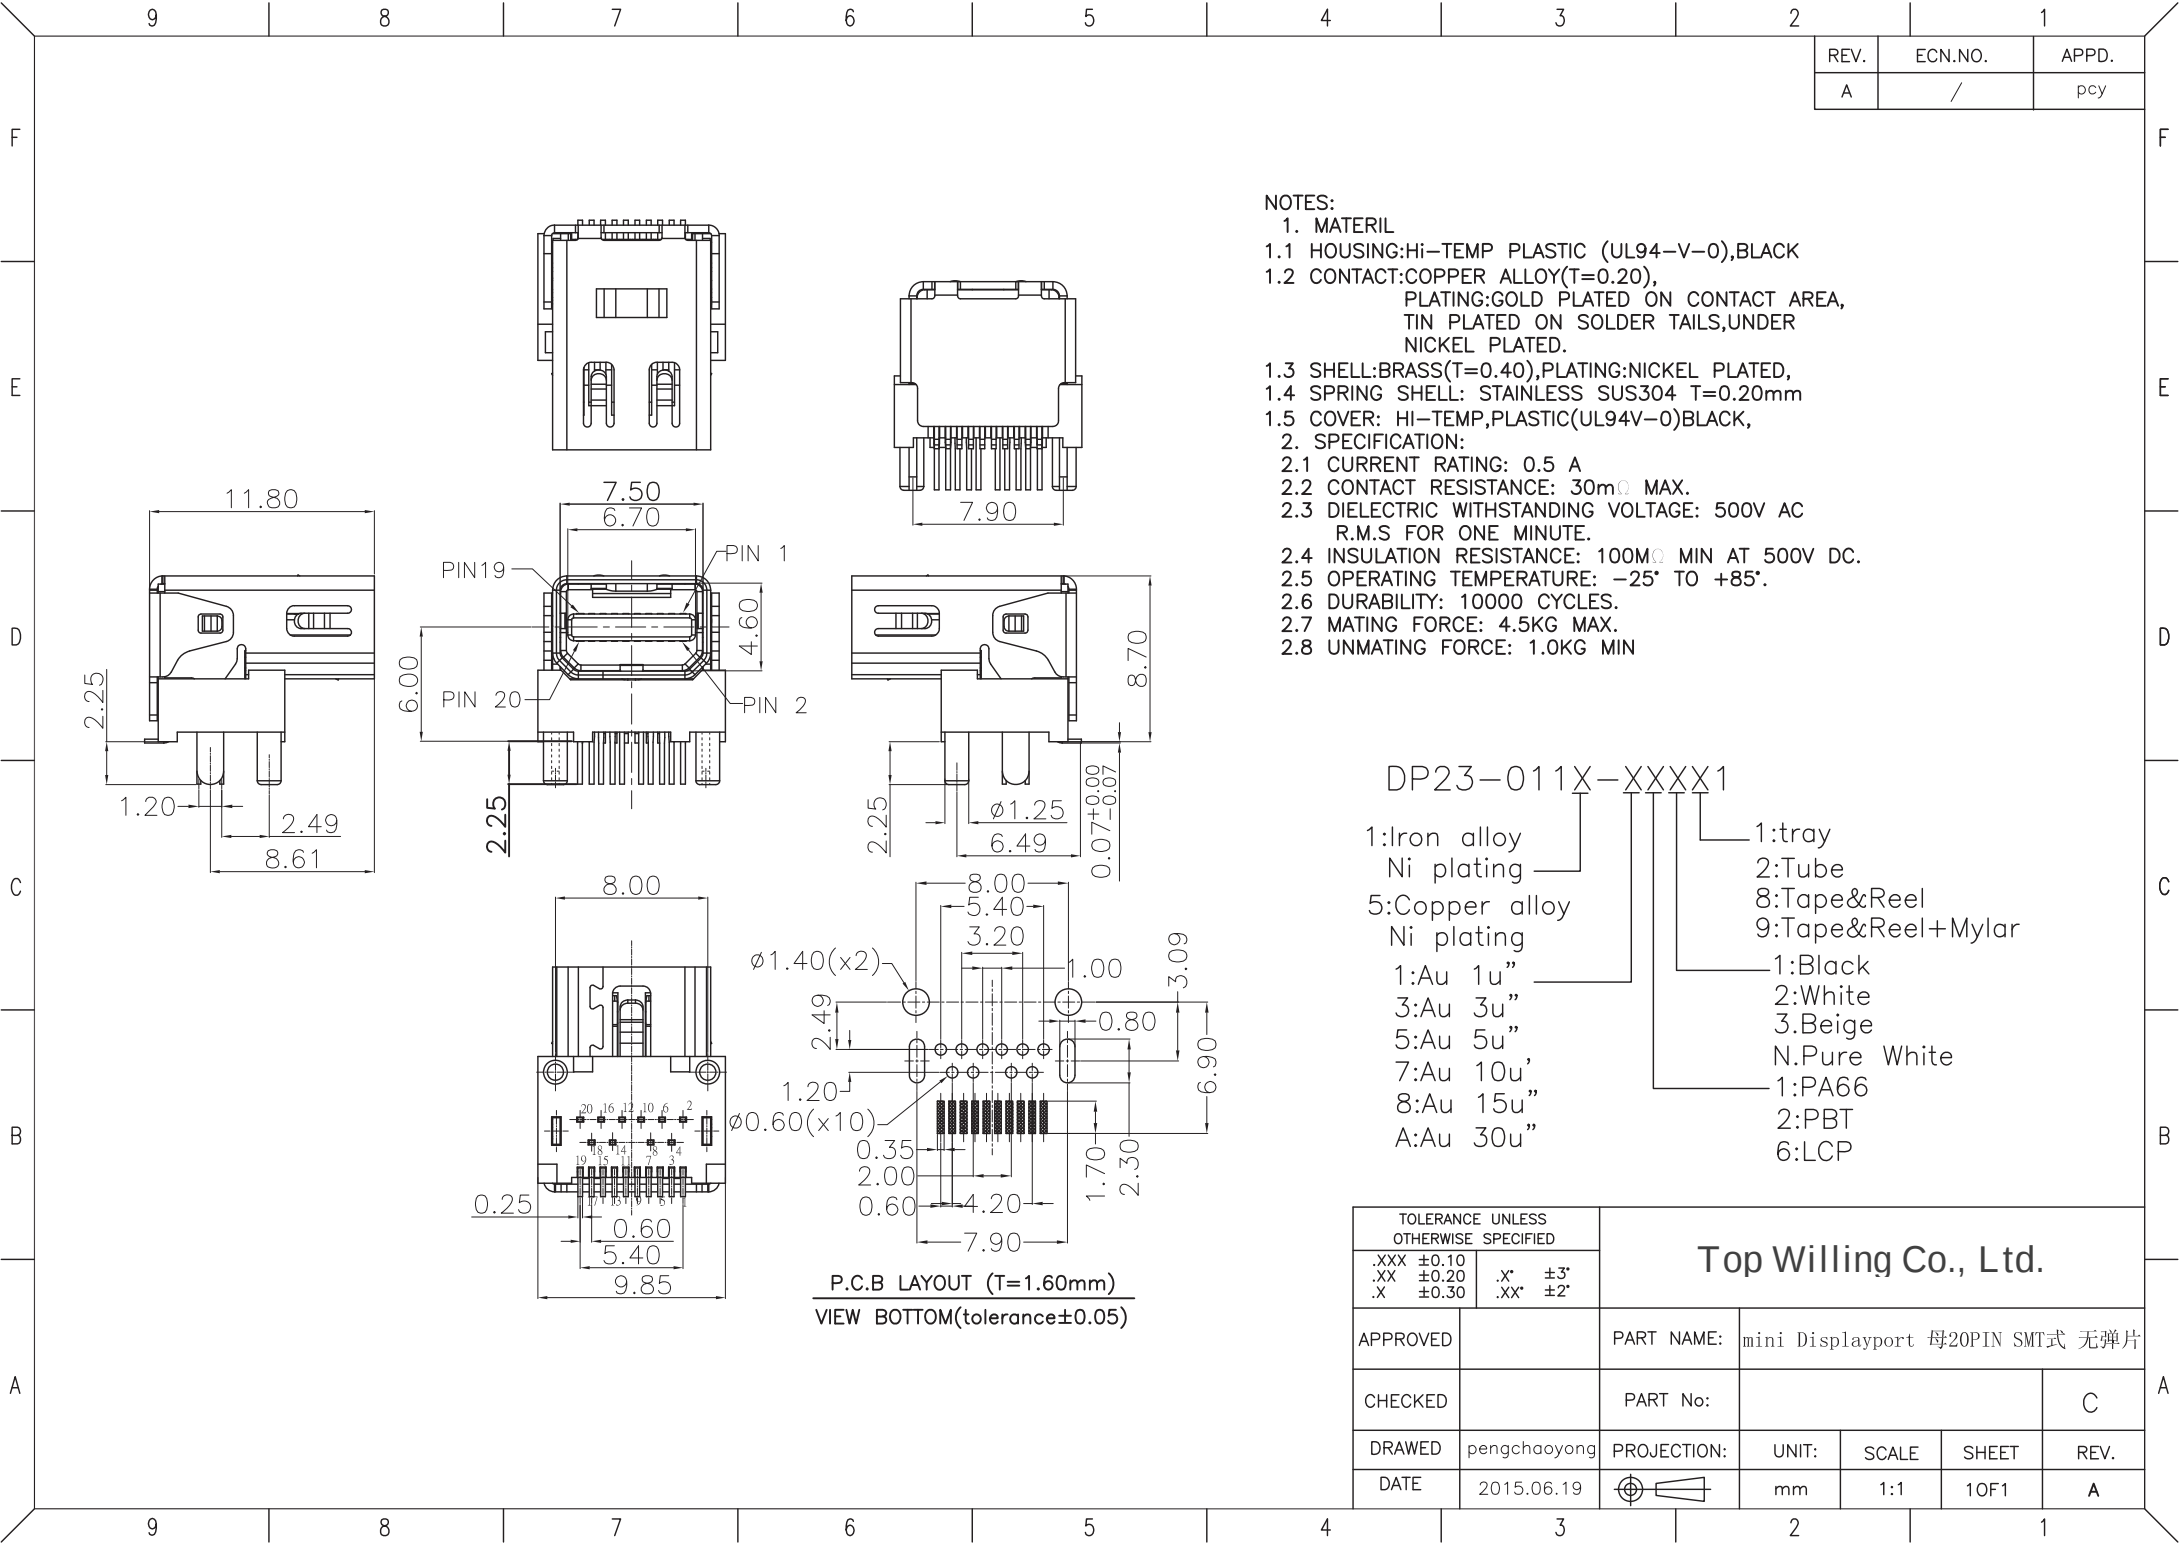

- NOTES:
- 1. MATERIL
 - 1.1 HOUSING:Hi-TEMP PLASTIC (UL94-V-0),BLACK
 - 1.2 CONTACT:COPPER ALLOY(T=0.20),
PLATING:GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAILS,UNDER
NICKEL PLATED.
 - 1.3 SHELL:BRASS(T=0.40),PLATING:NICKEL PLATED,
 - 1.4 SPRING SHELL: STAINLESS SUS304 T=0.20mm
 - 1.5 COVER: HI-TEMP,PLASTIC(UL94V-0)BLACK,
 - 2. SPECIFICATION:
 - 2.1 CURRENT RATING: 0.5 A
 - 2.2 CONTACT RESISTANCE: 30mΩ MAX.
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
R.M.S FOR ONE MINUTE.
 - 2.4 INSULATION RESISTANCE: 100MΩ MIN AT 500V DC.
 - 2.5 OPERATING TEMPERATURE: -25° TO +85°.
 - 2.6 DURABILITY: 10000 CYCLES.
 - 2.7 MATING FORCE: 4.5KG MAX.
 - 2.8 UNMATING FORCE: 1.0KG MIN

DP23-011X-XXXX1

- 1:Iron alloy
- Ni plating
- 5:Copper alloy
- Ni plating
- 1:Au 1u"
- 3:Au 3u"
- 5:Au 5u"
- 7:Au 10u'
- 8:Au 15u"
- A:Au 30u"
- 1:tray
- 2:Tube
- 8:Tape&Reel
- 9:Tape&Reel+Mylar
- 1:Black
- 2:White
- 3.Beige
- N.Pure White
- 1:PA66
- 2:PBT
- 6:LCP

TOLERANCE UNLESS OTHERWISE SPECIFIED		Top Willing Co., Ltd.					
.XXX ±0.10	.X" ±3'	APPROVED	PART NAME: mini Displayport 母20PIN SMT式 无弹片				
.XX ±0.20	.X" ±2'	CHECKED	PART No:		C		
.X ±0.30		DRAWED pengchaoyong	PROJECTION:	UNIT:	SCALE	SHEET	REV.
		DATE 2015.06.19		mm	1:1	10F1	A