


Date	Rev.	Description

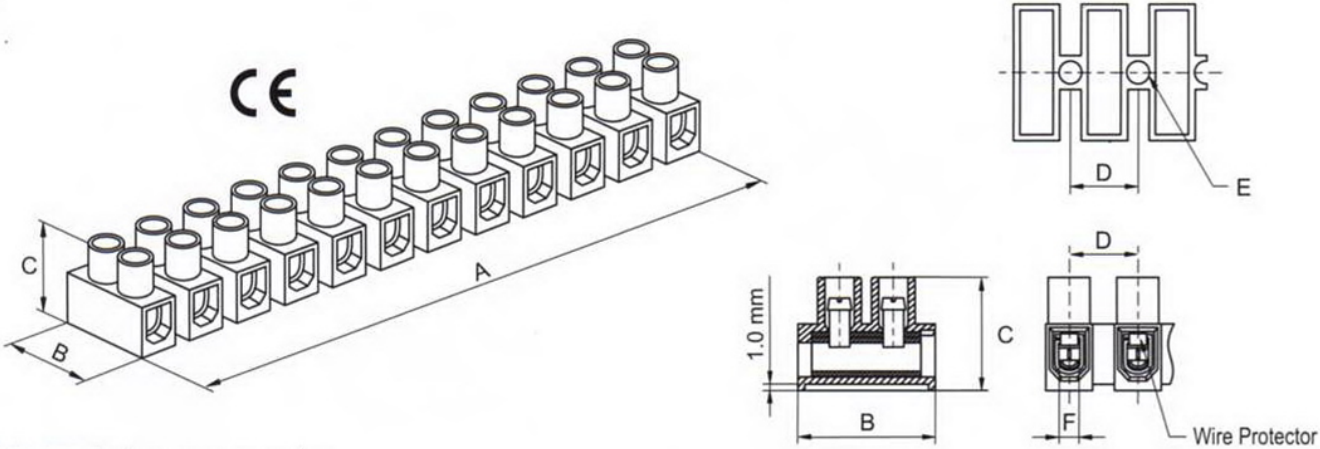

(Dimensions) :

Model	Cat. No.	Wire Range		Screw	Dimensions (mm)						Packing
		Cross-Sec.	(Cu, AWG)		A	B	C	D	E	F	
PA7	PA7	1.5 mm ²	22-12 Sol/Str	M2.6x5	96.20	17.00	14.50	8.20	2.90	2.8±0.1	50 Pcs/Bag 500 Pcs/Ctn
PA7DS	PA7DS	1.5 mm ²	22-12 Sol/Str	M2.6x5	96.20	17.00	14.50	8.20	2.90	2.8±0.1	50 Pcs/Bag 500 Pcs/Ctn
PA9	PA9	2.5 mm ²	22-12 Sol/Str	M3.0x6	116.8	20.20	16.70	10.00	3.60	3.4±0.1	50 Pcs/Bag 500 Pcs/Ctn
PA9DS	PA9DS	2.5 mm ²	22-12 Sol/Str	M3.0x6	116.8	20.20	16.70	10.00	3.60	3.4±0.1	50 Pcs/Bag 500 Pcs/Ctn

(Approvals) :

Model				
PA7 PA7DS	300V 10A #12-#22	450V 17.5A 1.5 mm ²	450V 17.5A 1.5 mm ²	450V 17.5A 1.5 mm ²
PA9 PA9DS	600V 30A #12-#22	450V 24A 2.5 mm ²	450V 24A 2.5 mm ²	450V 24A 2.5 mm ²

MATERIAL:		GOLDSUN ELECTRONICS CO., LTD.			
		JAMECO NO. 215011&215029		GOLDSUN NO.	
DRAWN: Erin VERIFY PEOPLE: Chesley		Description			Rev. 1
		UNIT: mm	SCALE:	SHEET 1 OF 1	CAS No: ERN No:

DCC. NO.
A4 DRAWING NO.