

INTRODUCTION:

Adam Tech RS Series .100" pitch Receptacle Strips are a series of sockets offered in a multitude of sizes and profiles designed to satisfy most .100" pitch socket requirements. Available in Single, Dual and Triple row, they are offered in Straight, Right Angle, SMT, Bottom Entry and Pass Through PCB mounting styles. Each type has a specially designed contact system which uses a wiping mating action and produces a high normal force connection with gold, tin or selective gold plating. All are available with Standard or Hi-Temp Thermoplastic insulators. Our SMT offering is available with optional pick and place pads and tape & reel packaging.

FEATURES:

- Broad range of sizes and profiles
- Contact systems with high normal force
- Choice of contact plating
- SMT pick & place option
- Optional Tape & reel packaging

MATING CONNECTORS:

Adam Tech PH series .100" pitch pin headers and all industry standard pin headers with a .025" (0.64mm) square pin.

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL94V-0
Optional Hi-Temp insulator: Nylon 6T, rated UL94V-0
Insulator Color: Black
Contacts: Phosphor Bronze

Contact Plating:

G = Gold over nickel underplate overall
SG = Gold over nickel underplate on contact area, tin over copper underplate on tails.
T = Tin over copper underplate overall

Electrical:

Operating voltage: 250V AC max.
Current rating: 3 Amps max.
Contact resistance: 20 mΩ max. initial
Insulation resistance: 5000 MΩ min.
Dielectric withstanding voltage: 1000V AC for 1 minute

Mechanical:

Insertion force: 0.375 lbs per contact max.
Withdrawal force: 0.125 lbs per contact min.

Temperature Rating:

Operating temperature: -40°C to +105°C

PACKAGING:

Anti-ESD plastic trays
(Tape and Reel optional for SMT option)

SAFETY AGENCY APPROVALS:

UL Recognized & CSA Certified,
File no. E224053



ORDERING INFORMATION

RS1

12

G

SERIES INDICATOR

RS1 = Single row vertical mount receptacle

RS1R = Single row right angle mount receptacle

RS2 = Dual row vertical mount receptacle

RS2R = Dual row right angle mount receptacle

RSB = Dual row straight PCB mount with polarization bump and keyed corner contacts

RSBR = Dual row right angle PCB mount with polarization bump and keyed corner contacts

RSE1 = Single row elevated receptacle

RSE2 = Dual row elevated receptacle

RSM1 = Single row surface mount

RSM2 = Dual row surface mount

PLATING

G = Gold plated

T = Tin plated

SG = Gold plating in contact area, Tin Plated solder tails

POSITIONS

Single row: 1 thru 40

Dual row: 2 thru 80

OPTIONS:

Add designator(s) to end of part number

SMT = SMT Dual row with Hi-Temp insulator

SMT-A = SMT Single Row Type A with Hi-Temp insulator

SMT-B = SMT Single Row Type B with Hi-Temp insulator


30 = 30 μ in gold plating in contact area

P = Optional guide peg on SMT version


HT = Hi-Temp insulator for Hi-Temp soldering

processes up to 260°C (Add this option for thru-hole products only. All SMT products are manufactured with Hi-Temp insulators)


**RECEPTACLE STRIPS
FOUR SIDED CONTACT
PAGE 329, 330 & 334**

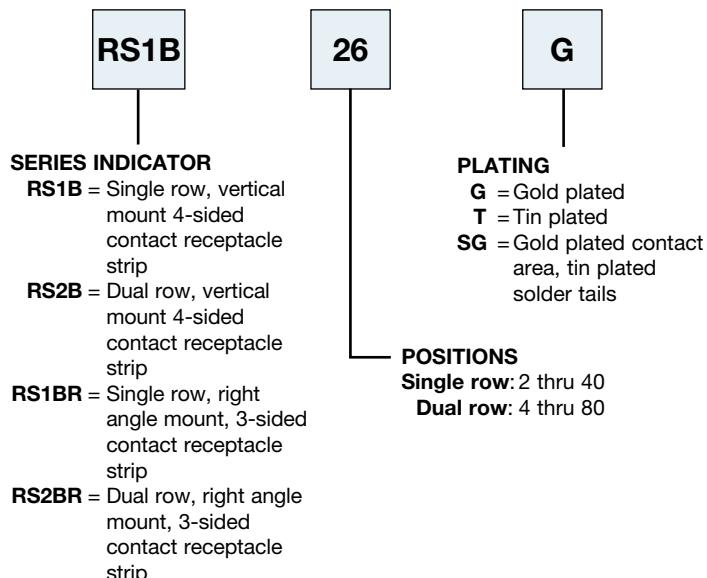


**RECEPTACLE STRIPS
LOW PROFILE
PAGE 333**

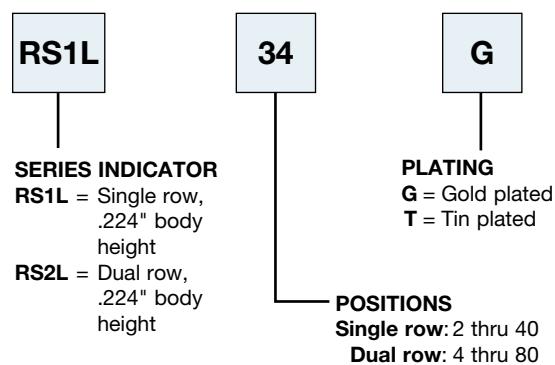

**RECEPTACLE STRIPS
BOTTOM, PASS THROUGH OR DUAL ENTRY**

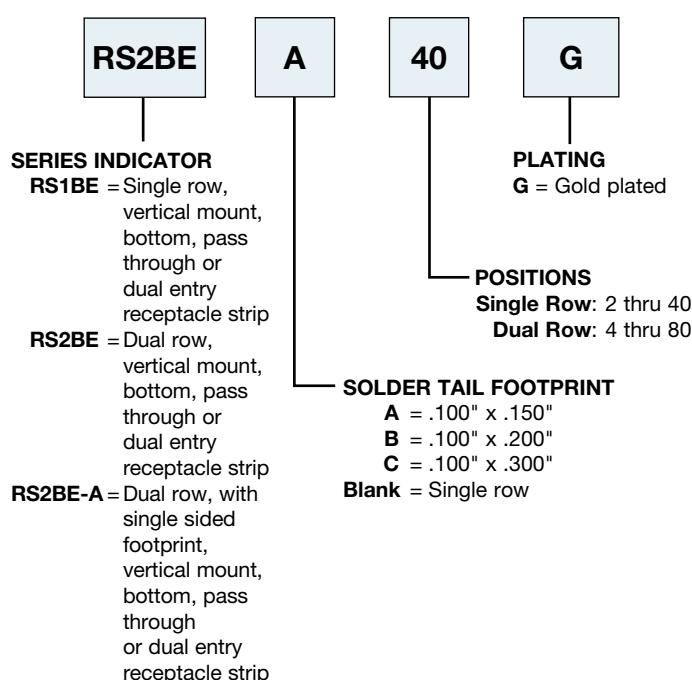

**RECEPTACLE STRIPS
VERY LOW PROFILE
PAGE 328**

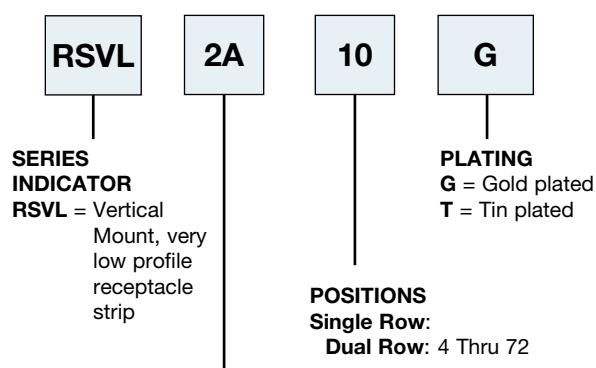

PROFILE / NO. OF ROWS

- 1A** = Single row, .138" body height
- 1B** = Single row, .205" body height
- 2A** = Dual row, .138" body height
- 2B** = Dual row, .205" body height

OPTIONS:









Add designator(s) to end of part number

A = Type A PCB Layout





B = Type B PCB Layout

.100" RECEPTACLE STRIPS


.138" & .205" HEIGHT SINGLE AND DUAL ROW
RS SERIES

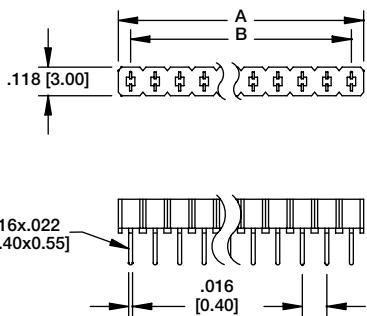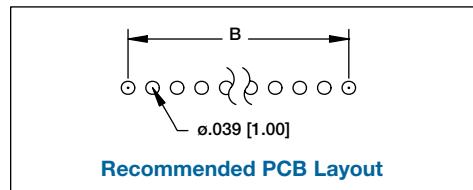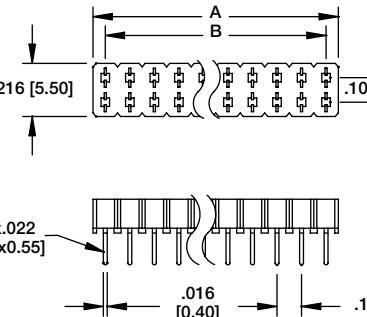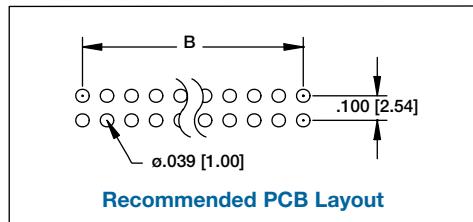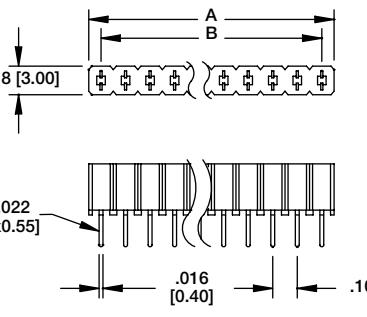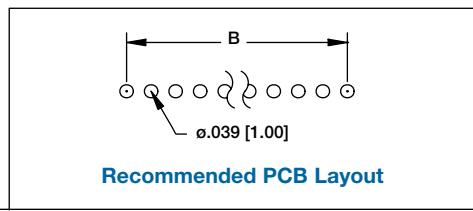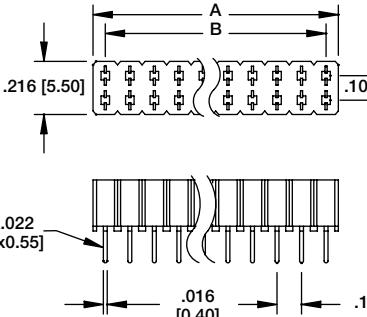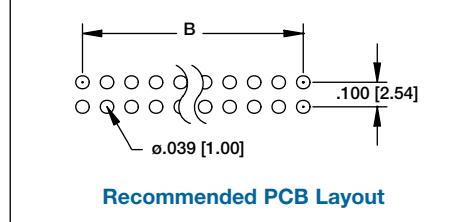 <p>Ordering Information pg. 327</p> <p>A = .100 [2.54] X No. of Positions B = .100 [2.54] X No. of Spaces</p>	<p>RSVL-1A</p>  <p>RSVL-1A-18-G</p> <p>Recommended PCB Layout</p> 
 <p>Ordering Information pg. 327</p> <p>A = .100 [2.54] X No. of Positions Per Row B = .100 [2.54] X No. of Spaces</p>	<p>RSVL-2A</p>  <p>RSVL-2A-38-G</p> <p>Recommended PCB Layout</p> 
 <p>Ordering Information pg. 327</p> <p>A = .100 [2.54] X No. of Positions B = .100 [2.54] X No. of Spaces</p>	<p>RSVL-1B</p>  <p>RSVL-1B-18-G</p> <p>Recommended PCB Layout</p> 
 <p>Ordering Information pg. 327</p> <p>A = .100 [2.54] X No. of Positions Per Row B = .100 [2.54] X No. of Spaces</p>	<p>RSVL-2B</p>  <p>RSVL-2B-36-G</p> <p>Recommended PCB Layout</p> 

Ordering Information pg. 326

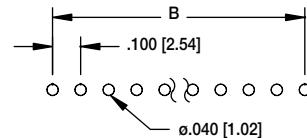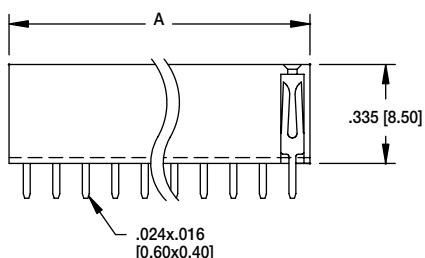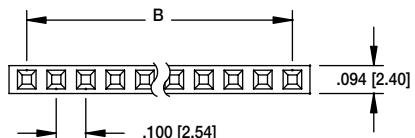





RS1

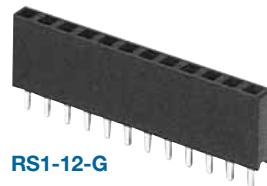


RS1-12-G

Recommended PCB Layout

A = .100 [2.54] X No. of Positions +.020 [0.50]
 B = .100 [2.54] X No. of Spaces

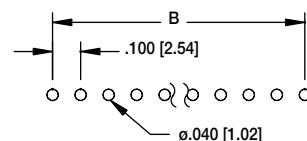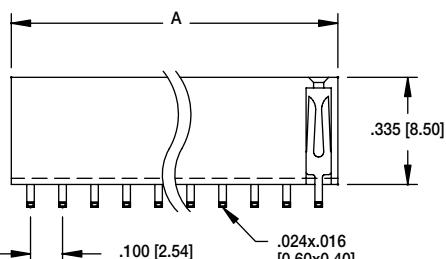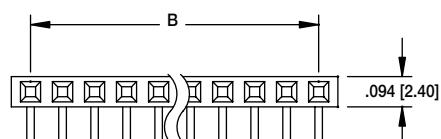





RS1R

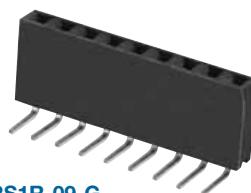

RS1R-09-G

Recommended PCB Layout

A = .100 [2.54] X No. of Positions +.020 [0.50]
 B = .100 [2.54] X No. of Spaces

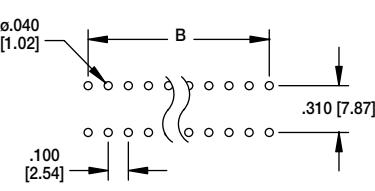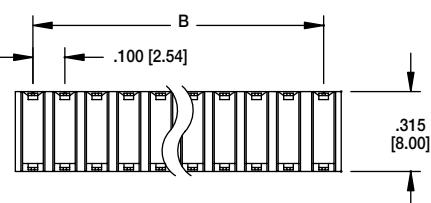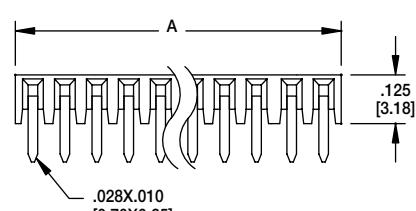

RS1BR




RS1BR-13-G

Recommended PCB Layout

A = .100 [2.54] X No. of Positions
 B = .100 [2.54] X No. of Spaces




.100" RECEPTACLE STRIPS

.335" HEIGHT, .100" [2.54] CENTERLINE
RS SERIES

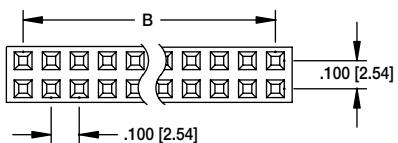


Ordering Information pg. 326

RS2


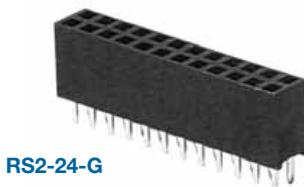
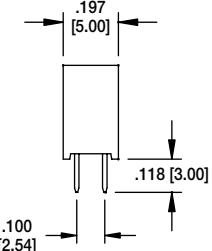
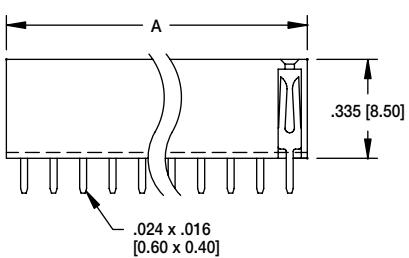


RS2-24-G

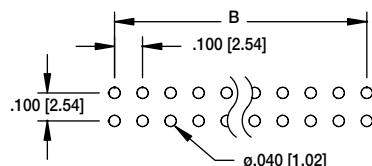


Recommended PCB Layout

A = .100 [2.54] x No. of Positions per row + .020 [0.50]
B = .100 [2.54] x No. of Spaces


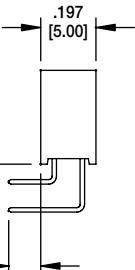
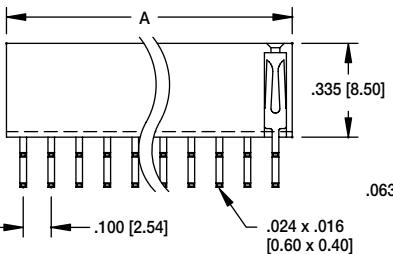
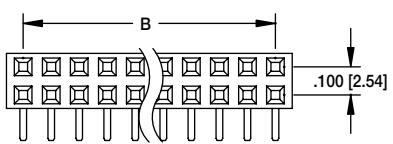


RS2R-14-G

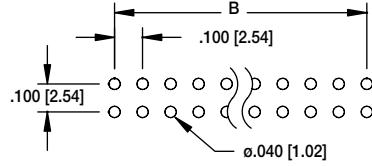


Recommended PCB Layout

A = .100 [2.54] x No. of Positions per row + .020 [0.50]
B = .100 [2.54] x No. of Spaces

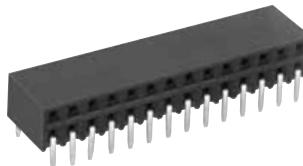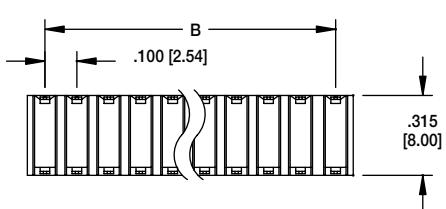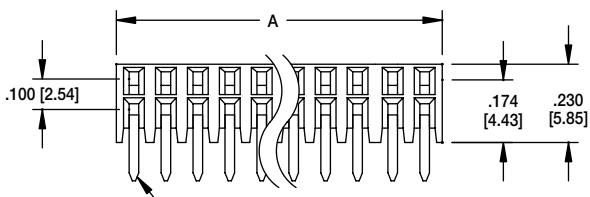


RS2BR-28-G

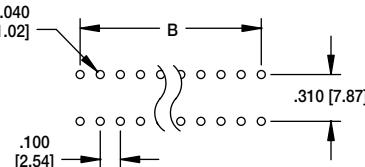


Recommended PCB Layout

A = .100 [2.54] x No. of Positions per row
B = .100 [2.54] x No. of Spaces


Ordering Information pg. 326




TYPE B




TYPE A

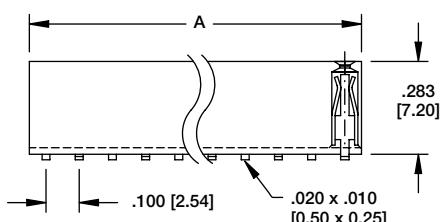


RSM1-10-SG-SMT-A

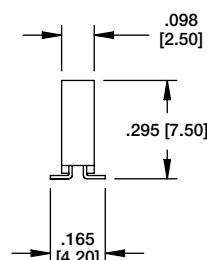

RSM1

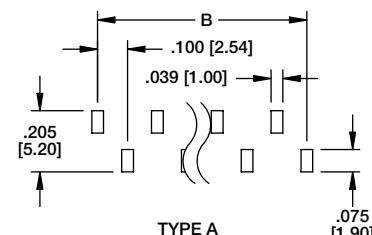


Recommended PCB Layout

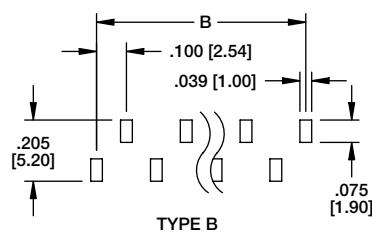




Recommended PCB Layout

A = .100 [2.54] x No. of Positions

B = .100 [2.54] x No. of Spaces

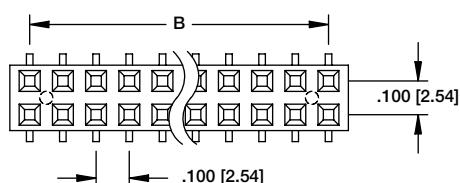

RSM2-20-SG-SMT

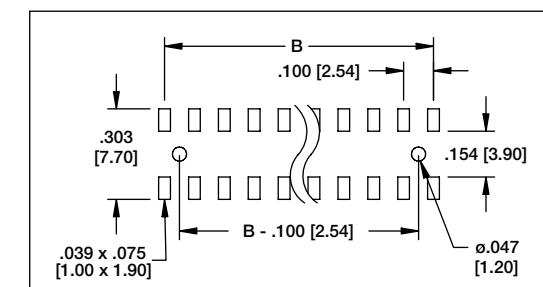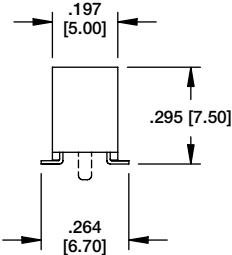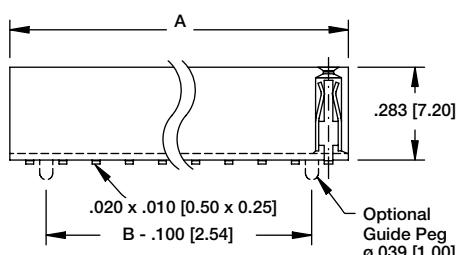


Recommended PCB Layout

A = .100 [2.54] x No. of Positions per row




B = .100 [2.54] x No. of Spaces

Ordering Information pg. 326

RSB


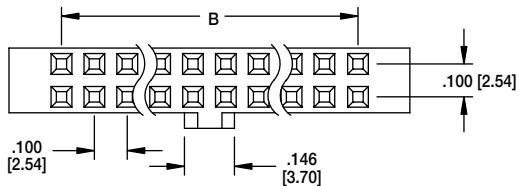


RSB-36-G

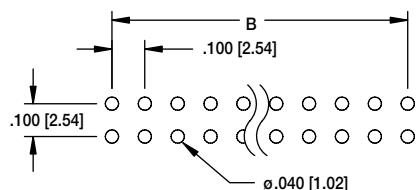
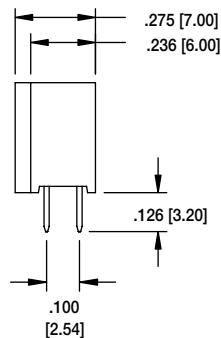
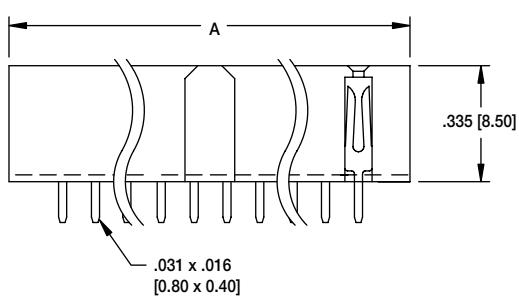


Recommended PCB Layout

RSBR

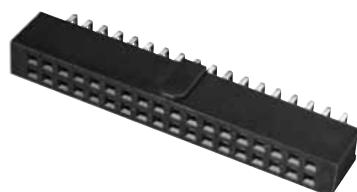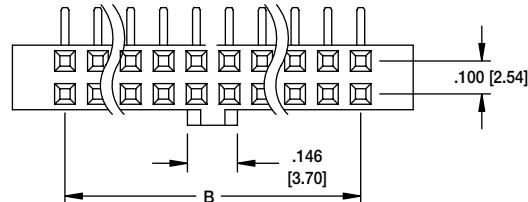

RSBR-36-G

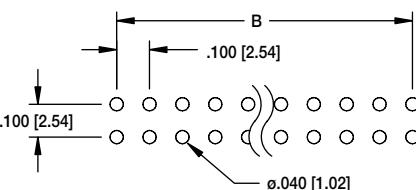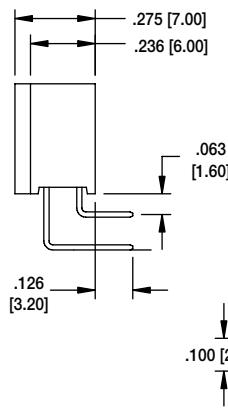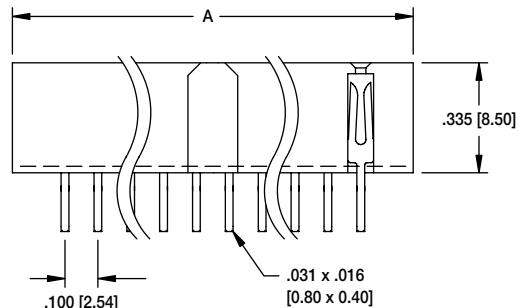



Recommended PCB Layout

A = .100 [2.54] x No. of Positions + .300 [7.62]


B = .100 [2.54] x No. of Spaces

Ordering Information pg. 327


RS1L

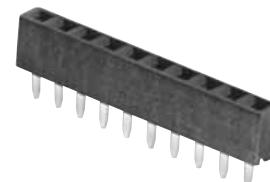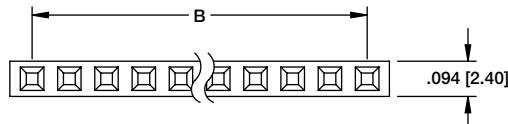

RS1L-10-G


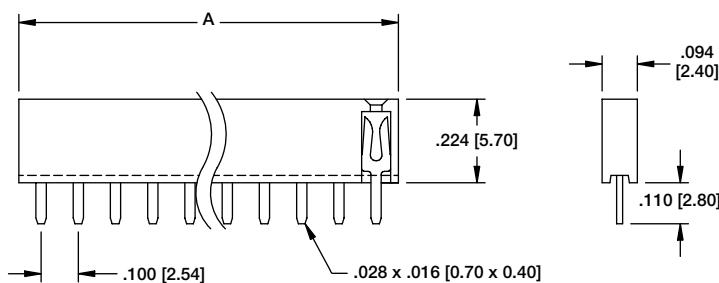


A = .100 [2.54] x No. of Positions
 B = .100 [2.54] x No. of Spaces

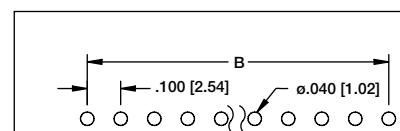


Recommended PCB Layout


RS2L

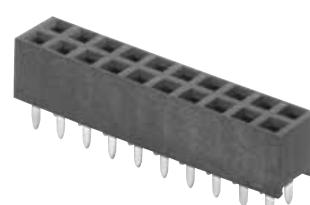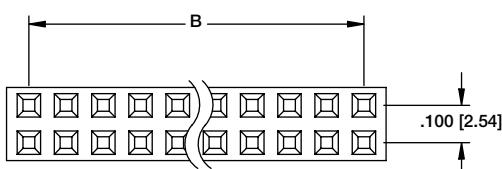

RS2L-20-G

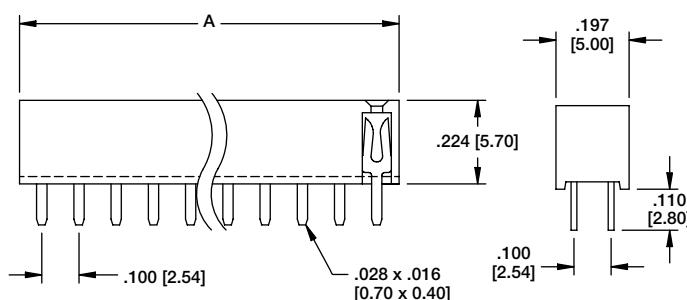


A = .100 [2.54] x No. of Positions per row
 B = .100 [2.54] x No. of Spaces

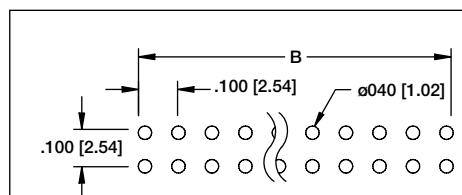



Recommended PCB Layout

Ordering Information pg. 327


RS1B

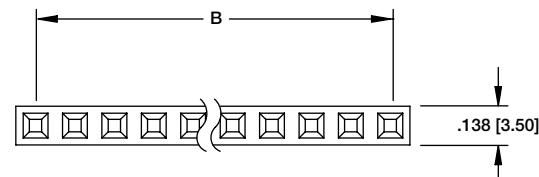

RS1B-10-SG

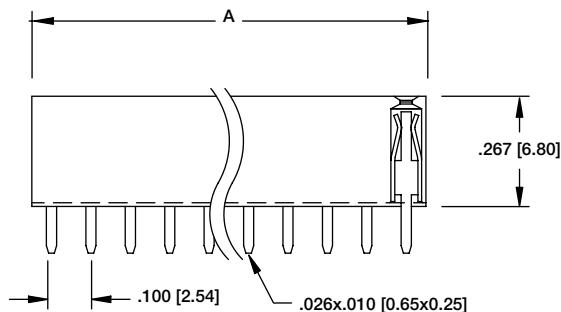


A = .100 [2.54] X No. of Positions
 B = .100 [2.54] X No. of Spaces





Recommended PCB Layout

RS2B

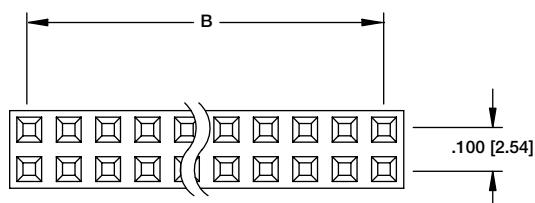

RS2B-20-SG

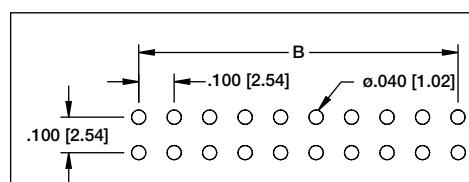
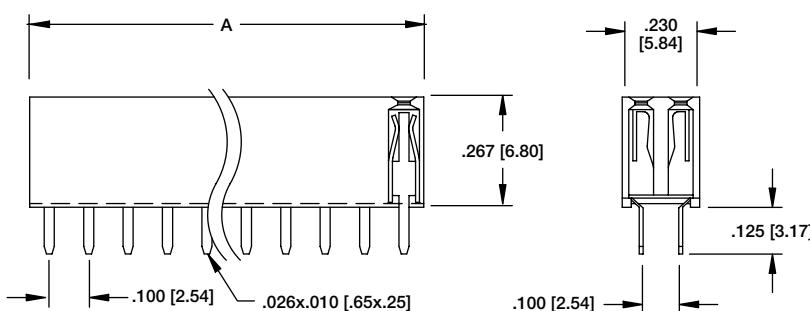


Recommended PCB Layout



A = .100 [2.54] X No. of Positions per row
 B = .100 [2.54] X No. of Spaces

Ordering Information pg. 327


RS1BE-A/B

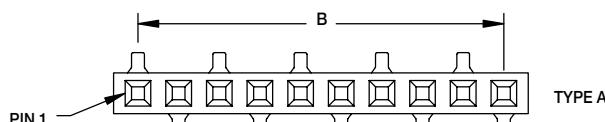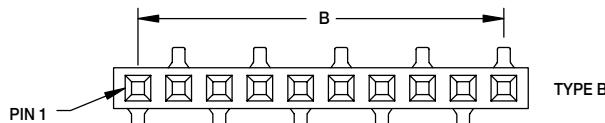


RS1BE-B-10-SG-A

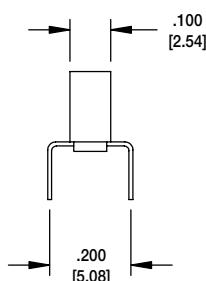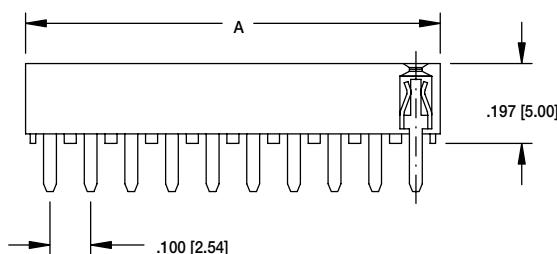

A = .100 [2.54] X No. of Positions
B = .100 [2.54] X No. of Spaces

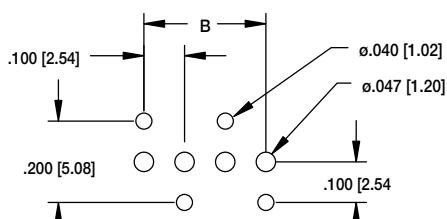


TYPE A

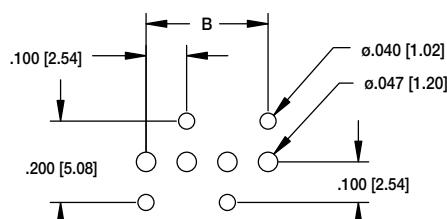

TYPE B

Recommended PCB Layouts




RS1BE

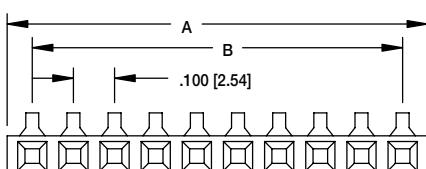

A = .100 [2.54] X No. of Positions
B = .100 [2.54] X No. of Spaces





RS1BE-10-SG

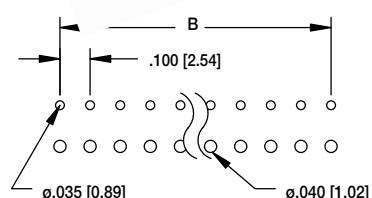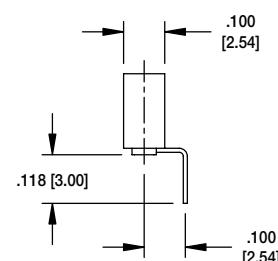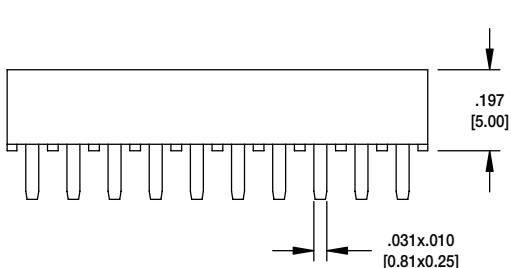

Recommended PCB Layout

Ordering Information pg. 327

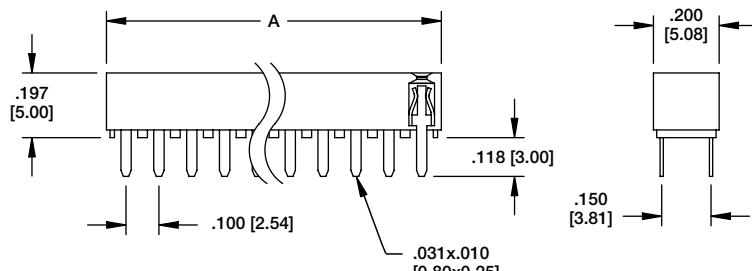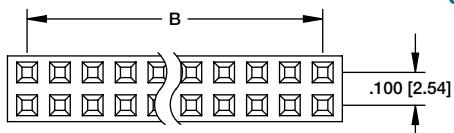


A = .100 [2.54] X No. of Positions per row
 B = .100 [2.54] X No. of Spaces

SINGLE ROW CONFIGURATION
ALSO AVAILABLE



RS2BE-A
TOP ENTRY



RS2BE-A-28-G

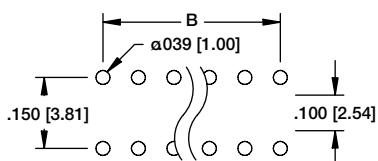


Recommended PCB Layout

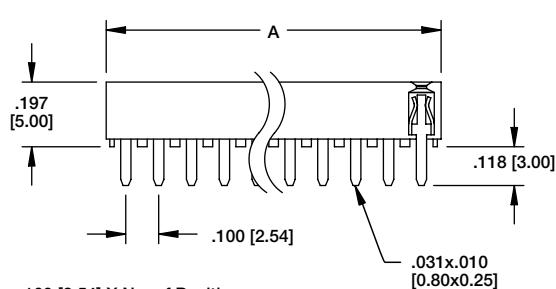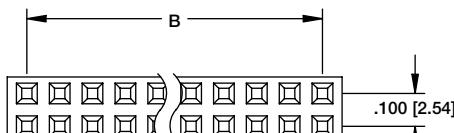


A = .100 [2.54] X No. of Positions per row
 B = .100 [2.54] X No. of Spaces

SINGLE ROW CONFIGURATION
ALSO AVAILABLE



RS2BE-B
TOP OR BOTTOM
ENTRY

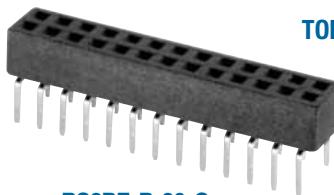

RS2BE-B-26-G

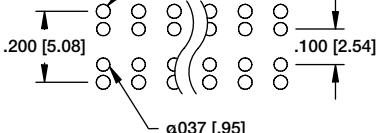


Recommended PCB Layout

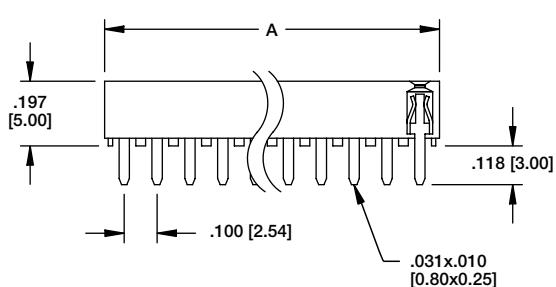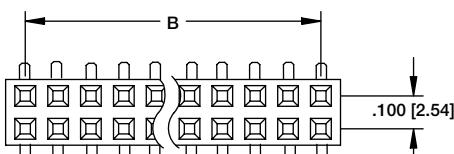


A = .100 [2.54] X No. of Positions per row
 B = .100 [2.54] X No. of Spaces

SINGLE ROW CONFIGURATION
ALSO AVAILABLE



RS2BE-C
TOP OR
BOTTOM ENTRY

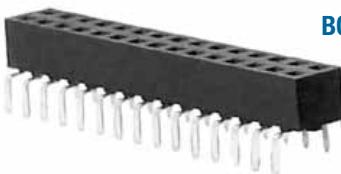

RS2BE-C-30-G

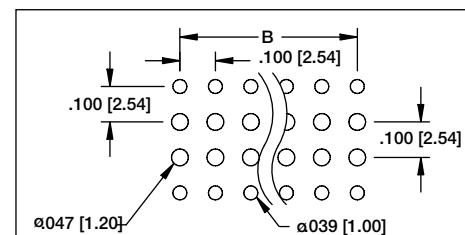

Recommended PCB Layout

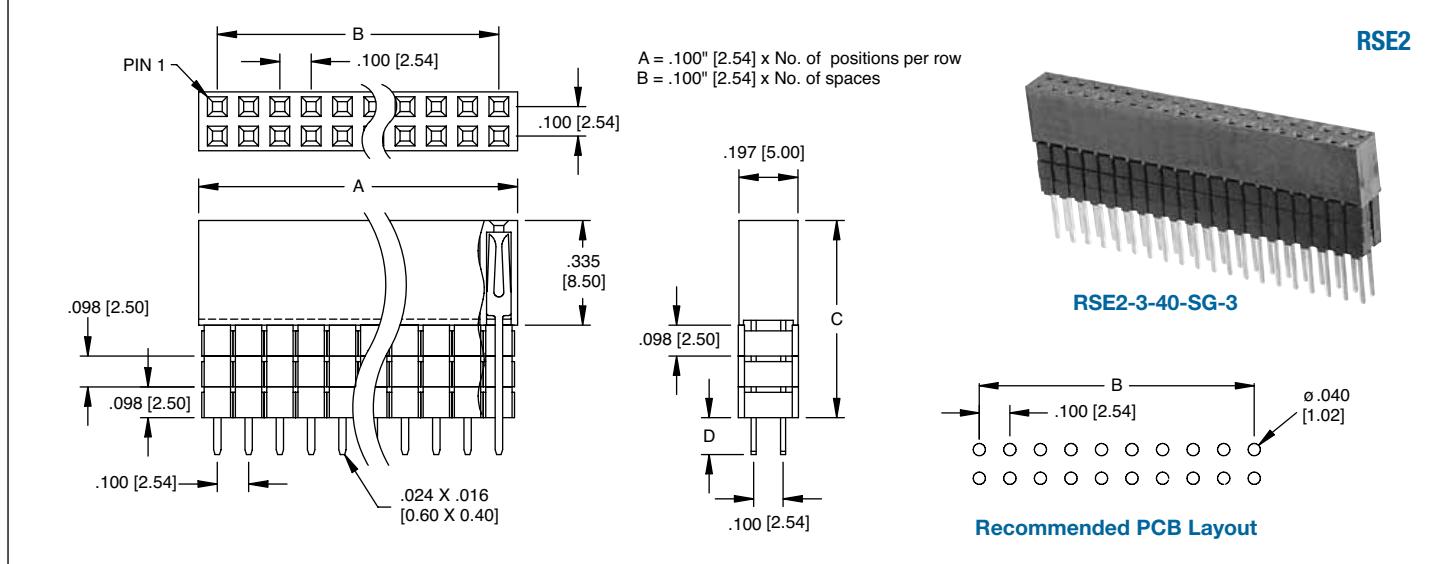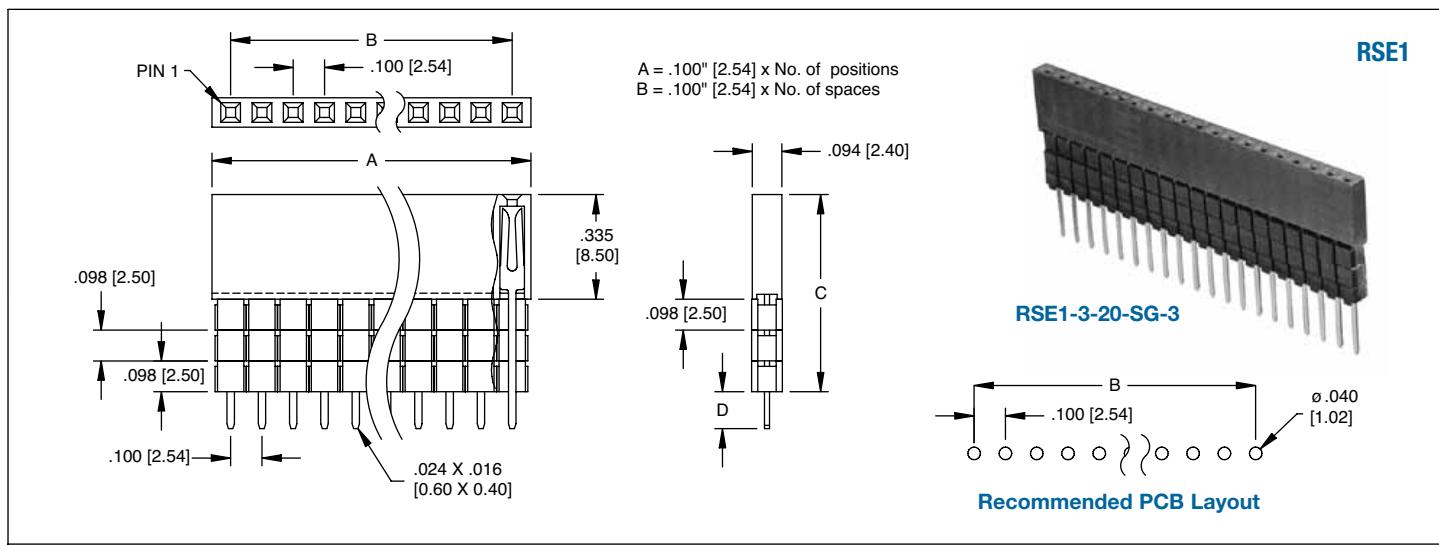

ORDERING INFORMATION



SERIES INDICATOR

RSE1 = Single row,
vertical
elevated
socket strip



2

POSITIONS




Single Row
01 thru 40
Dual Row
02 thru 80



SG

PIN LENGTH

Dim. D





SG = Selective Gold
Plating in contact area,
Tin Plated tails



PART NUMBER	INSULATORS	DIM. C	DIM. D
RSEX-1-XX-SG-1	1	.433 [11.00]	.118 [3.00]
RSEX-1-XX-SG-2	1	.433 [11.00]	.315 [8.00]
RSEX-1-XX-SG-3	1	.433 [11.00]	.448 [11.40]
RSEX-2-XX-SG-1	2	.531 [13.50]	.216 [5.50]
RSEX-3-XX-SG-1	3	.635 [16.12]	.118 [3.00]
RSEX-3-XX-SG-2	3	.635 [16.12]	.252 [6.40]

*Replace "X" with "1" for single row or "2" for double row.


*Replace “XX” with total number of positions.

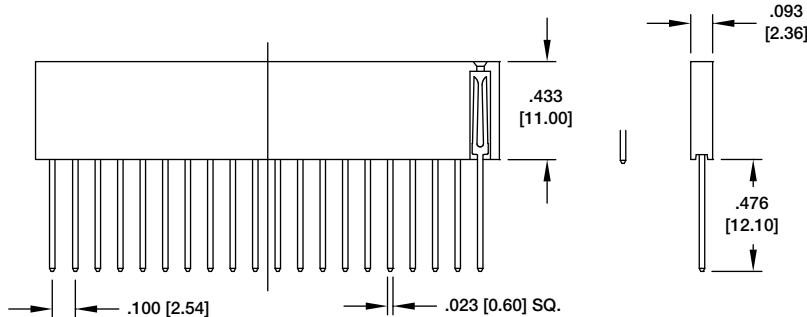


RS-20-G-ISA

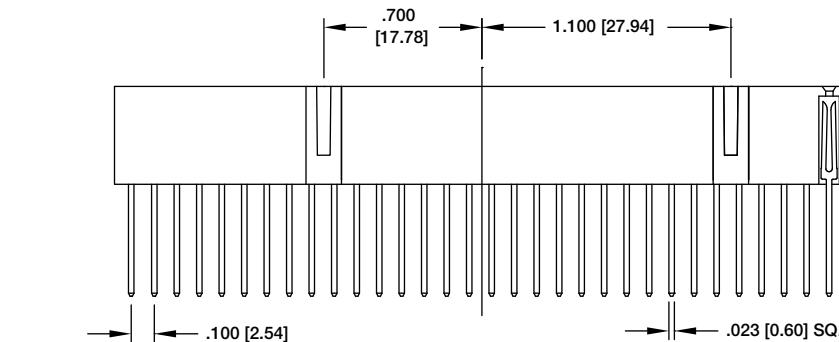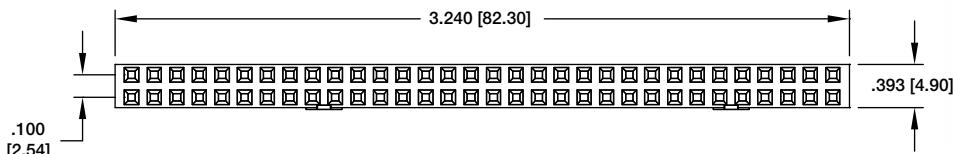


RS-64-G-ISA

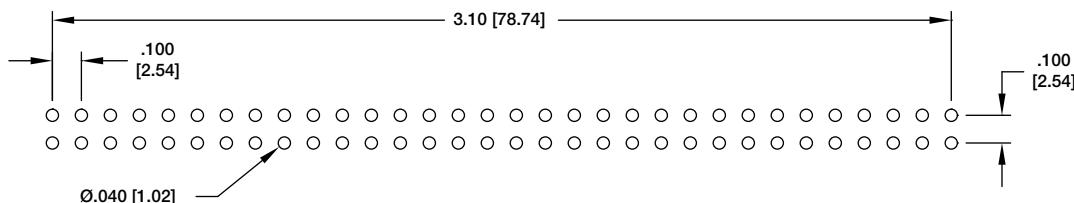


Recommended PCB Layout

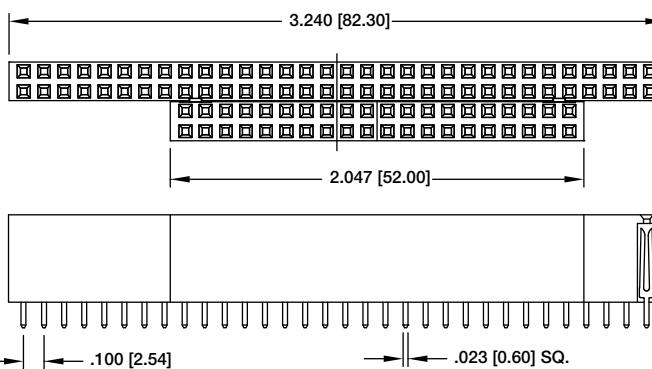


RS-84-G-ISA-1

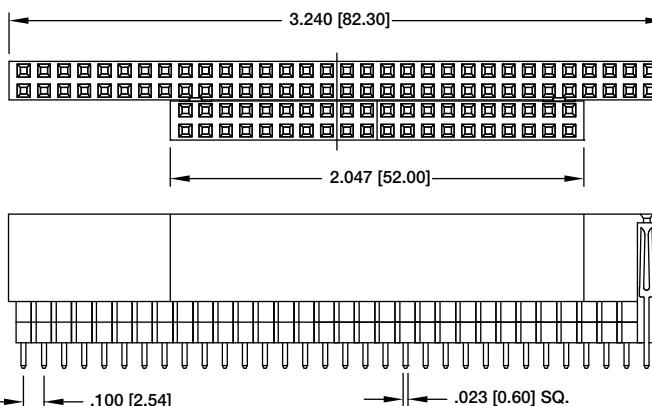

RS-84-G-ISA-2

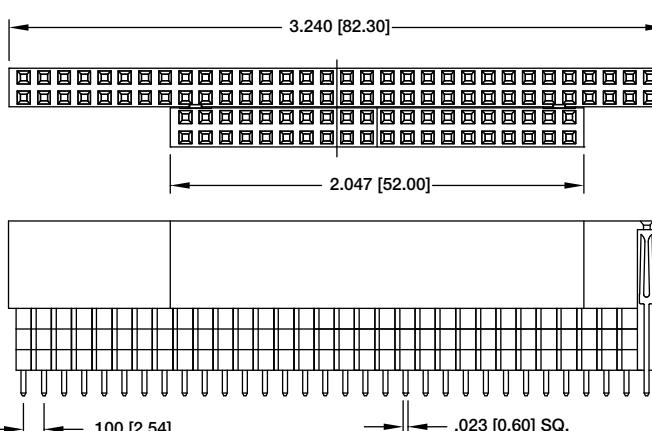

RS-84-G-ISA-3

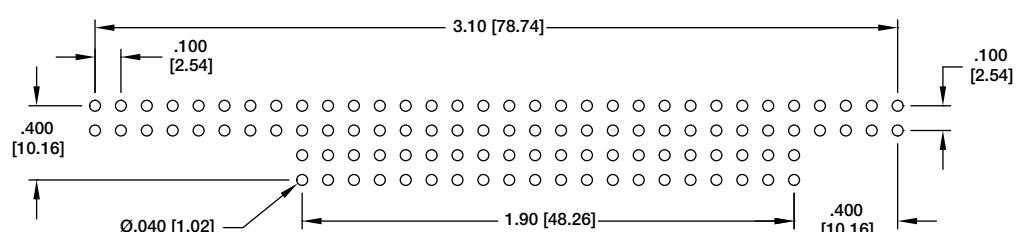

Recommended PCB Layout