
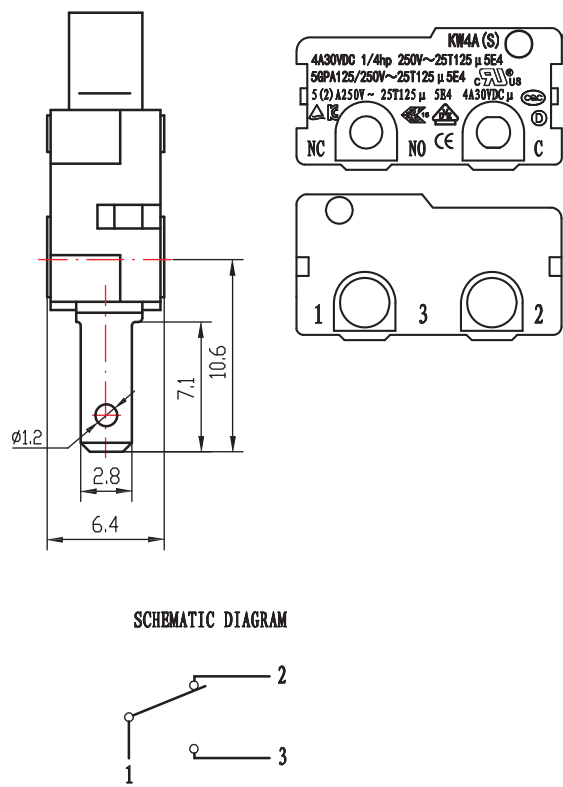


SWITCH MICRO STRAIGHT LEVER SINGLE POLE DOUBLE THROW

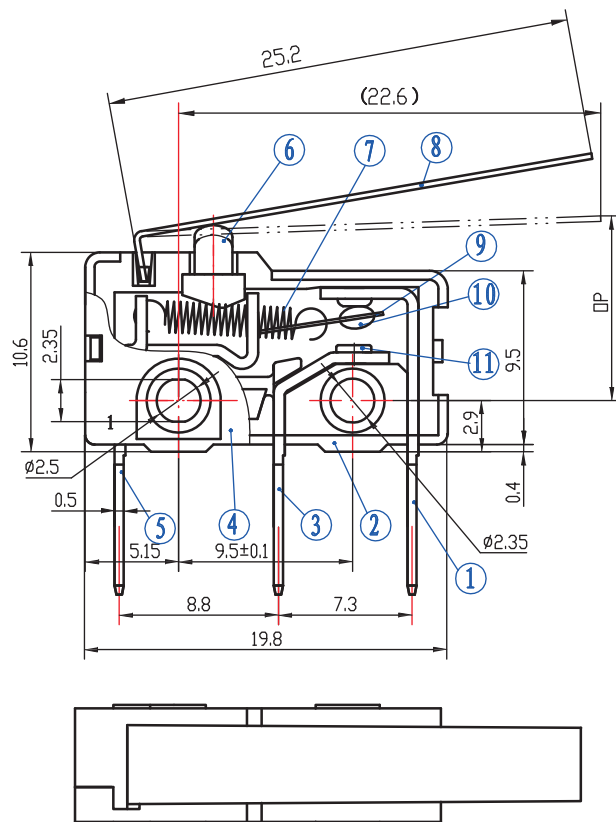

SCHEMATIC DIAGRAM

General Tolerance Dimemmsion

≤ 3	± 0.1
> 3 -10	± 0.2
> 10 -30	± 0.3

3. Safety authentication



DCC. NO.
A4 DRAWING NO.

Date	Rev.	Description

1. Specifications

RATINGS	4A30VDC 1/4hp 250V~25T125 μ 5B4
TEMPERATURE	5GPA125/250V~25T125 μ 5B4
ELECTRONICAL LIFE	5(2) A250V~25T125 μ 5B4 4A30VDC μ
INSULATION STRENGTH	100MΩ MIN
TEST VOLTAGE	AC1000V/1500V
CONTACT RESISTANCE	50mΩ MAX
OPERATING FORCE	0.3N MAX
OP	9 ± 1.5mm

2. Parts List

No.	Name	Material
1	NC terminal	Brass alloy H65, Silver plated
2	CASE	Plastic PBT
3	NO terminal	Brass alloy H65, Silver plated
4	COVER	Plastic PBT
5	TERMINAL	Brass alloy H65, Silver plated
6	Plunger	Plastic PPS,
7	Pull spring	SUS304H
8	Moving arm	Stainless steel SUS304
9	Moving piece	Tin-brass QSn6.5-0.1
10	Contact	AgNi10
11	Contact	AgNi10

GOLDSUN ELECTRONICS CO., LTD.

PART NO. 2204015	Rev. 1
Description :	
UNIT mm	SCALE SHEET 1 OF 1 CAS No: ERN No:
DRAWN : Jay	
VERIFY : Arthur / Sam	