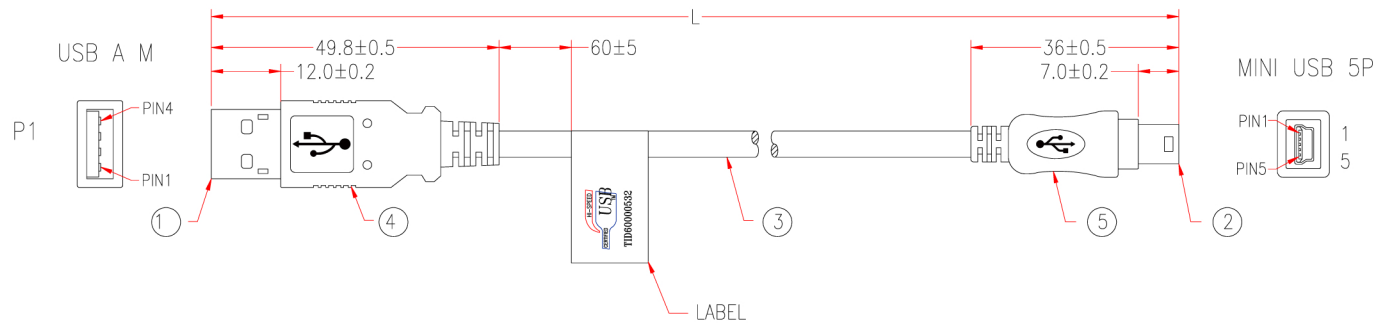


NOTE: All relevant materials are complied with RoHS directive .

5	BLACK HEAT SHRINK TUBE Ø1.0*5mm	A4HA23-0743	4	M743
	MOLDED PVC BLACK	H1BF01-0304K09		M304
4	MOLDED PVC BLACK	H1BF01-0304K09		M304
3	USB 2.0 CABLE, UL STYLE 1 TWISD PAIR 28AWG AND 2C 24AWG,OD 4.5mm, AMA BRAID, JACKET BLACK, DRAWING No. EUAB2801P2402C-139	H5KH29-0304K09	L-20mm	M304
2	MINI USB 5P MALE 2.0, GOLD FLASH ON CONTACTS, BLACK INSULATOR	A1HE31-0108	1	M108
1	USB A MALE 2.0, GOLD FLASH ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE	A1HA49-0108	1	M108
No.	DESCRIPTION		Q'TY	Supplier
APPROVED	 COMTOP Connectivity Solutions Inc. 268 Benton Court, City of Industry, CA 91798		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm	
CHECKED				
DRAWING				
DATE				
25/APR/12	ITEM NO.	10U2-151XX		UNIT:mm