


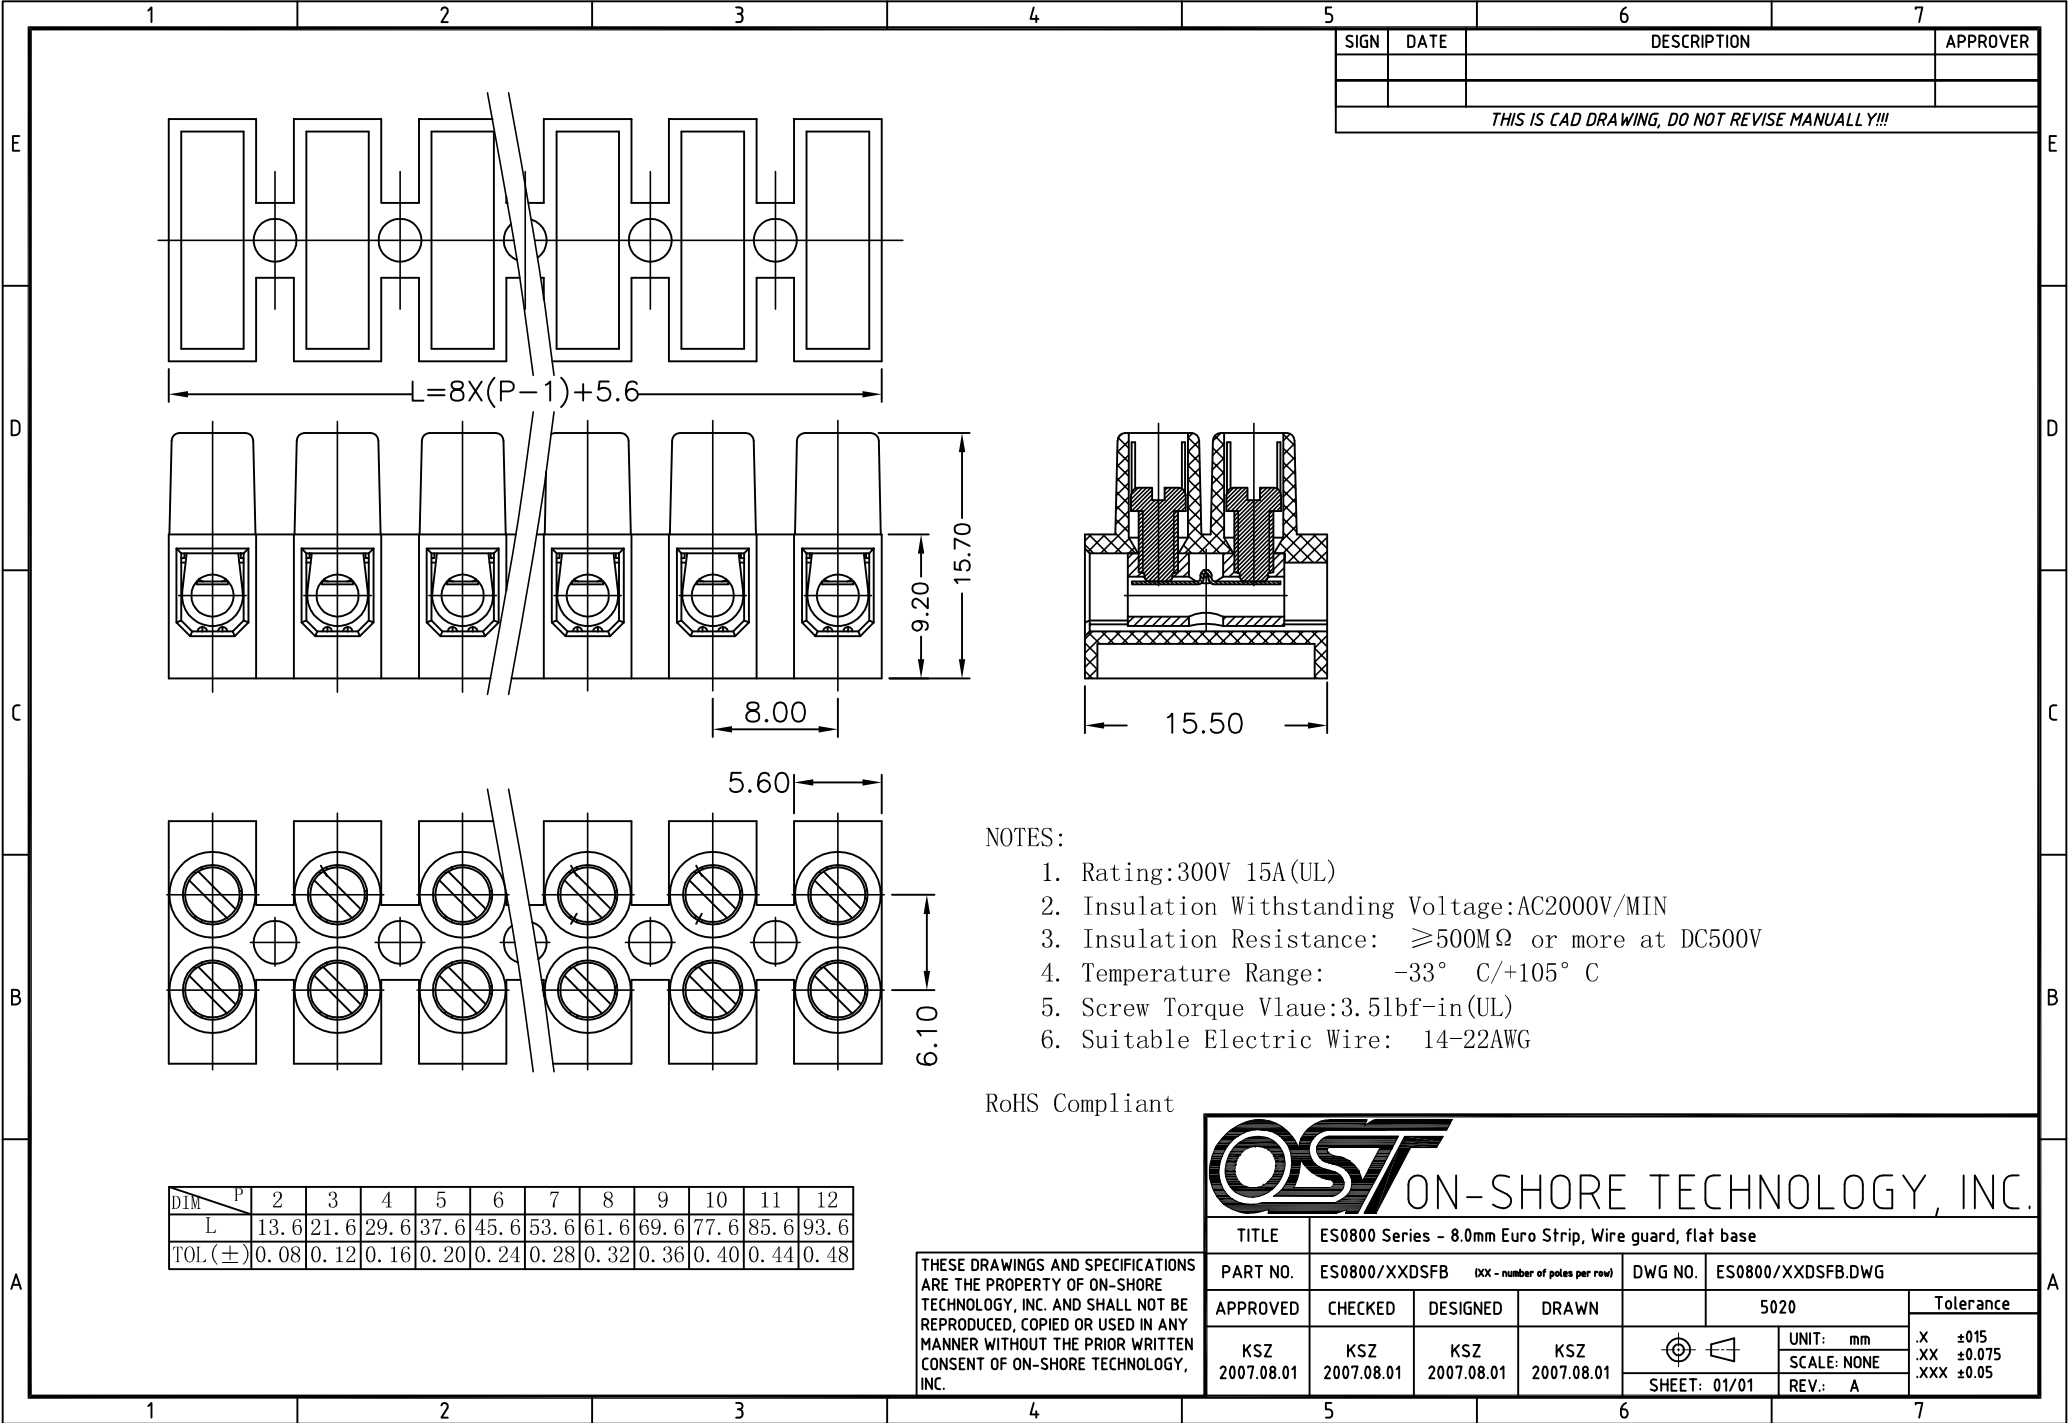

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

- NOTES:
1. Rating:300V 15A(UL)
 2. Insulation Withstanding Voltage:AC2000V/MIN
 3. Insulation Resistance: $\geq 500M\Omega$ or more at DC500V
 4. Temperature Range: $-33^{\circ}C/+105^{\circ}C$
 5. Screw Torque Vlaue:3.5lbf-in(UL)
 6. Suitable Electric Wire: 14-22AWG

RoHS Compliant

DIM	P	2	3	4	5	6	7	8	9	10	11	12
L		13.6	21.6	29.6	37.6	45.6	53.6	61.6	69.6	77.6	85.6	93.6
TOL.(±)		0.08	0.12	0.16	0.20	0.24	0.28	0.32	0.36	0.40	0.44	0.48

ON-SHORE TECHNOLOGY, INC.					
TITLE	ES0800 Series - 8.0mm Euro Strip, Wire guard, flat base				
PART NO.	ES0800/XXDSFB	DCX - number of poles per row		DWG NO.	ES0800/XXDSFB.DWG
APPROVED	CHECKED	DESIGNED	DRAWN	5020	
KSZ 2007.08.01	KSZ 2007.08.01	KSZ 2007.08.01	KSZ 2007.08.01	Tolerance	
				UNIT: mm	.X ±015
				SCALE: NONE	.XX ±0.075
				REV.: A	.XXX ±0.05
				SHEET: 01/01	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.