

插入型絕緣/金屬軸式編碼規則

RV 09 A X F - 40 E1 - 20 F X - B 5K - X X XXX
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

1. Product Line

RV Rotary Potentiometer

2. Model

3. Structure Difference

4. Derivatives

5. RoHS Version

F indicates RoHS Compliance

6. Type of Terminal

Code	Type of Terminal
10	Solder lug
20	PC board (horizontal)
30	PC board (vertical);front
40	PC board (vertical);back

7. Type of Bushing

8. Shaft Length

9. Type of Shaft

10. Axis Angle of F-type Shaft

11. Pattern of Resistance Curve

12. Resistance Value

13. Materials & Methods for Manufacturing Shaft & Bushing

14. Number of Click

Code	Specification
0	None
C	Center Click
D	11 Positions click
E	21 Positions click
F	41 Positions click

15. Serial No.

訂單指定事項：

開立訂單時，用途請依下表記載予以指定製品之規格詳細記載並確認之。

項目：

1. 型號。
2. 公稱阻值及線性要求。
3. 軸型及長度。
4. 端子型式。
5. 段點的有無。
6. 中間抽頭的有無。
7. 音量用或其他。
8. 手焊錫或鑄爐焊錫。

ORDERING INSTRUCTIONS









WHEN PLACING YOUR ORDER, PLEASE SPECIFY THE FOLLOWING ITEMS ACCORDING TO YOUR APPLICATION NEEDS. FOR MORE INFORMATION ABOUT OUR PRODUCTS, PLEASE REFER TO THE SPECIFICATION GIVEN ON THE FOLLOWING PAGES.

ITEMS：









1. MODEL.
2. NORMAL RESISTANCE VALUE AND TAPER.
3. SHAFT STYLE AND LENGTH.
4. TERMINAL STYLE.
5. WITH CLICK OR WITHOUT CLICK, CLICK POSITION
6. WITH TAP OR WITHOUT TAP, TAP POSITION.
7. FOR VOLUME CONTROL OR OTHER USE.
8. MANUAL SOLDERING OR DIP SOLDERING.

24mm METAL SHAFT SERIES

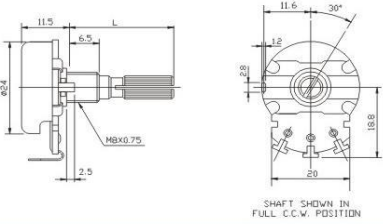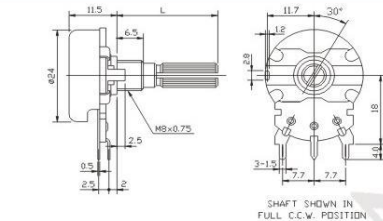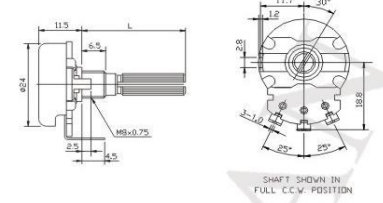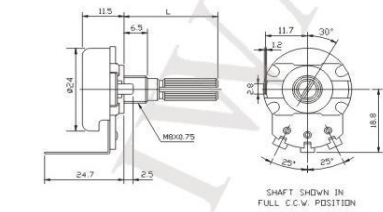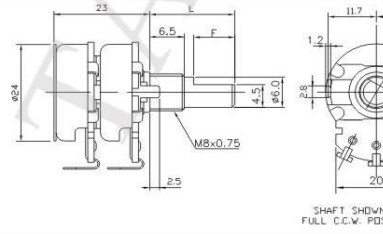

Model	Outline Drawing	Features / Individual Specification
RV24AF-10 	 SHAFT SHOWN IN FULL C.C.W. POSITION	
RV24AF-22 	 SHAFT SHOWN IN FULL C.C.W. POSITION	 PCB Mounting Hole Detail
RV24AF-30 	 SHAFT SHOWN IN FULL C.C.W. POSITION	 PCB Mounting Hole Detail
RV24AF-40 	 SHAFT SHOWN IN FULL C.C.W. POSITION	 PCB Mounting Hole Detail
RV24BF-10  NEW	 SHAFT SHOWN IN FULL C.C.W. POSITION	

24mm METAL SHAFT WITH SWITCH SERIES

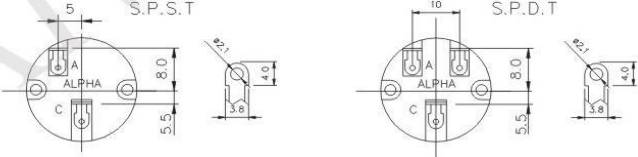Model	Outline Drawing	Features / Individual Specification																														
RV24A01F-10(S.P.S.T.) RV24A02F-10(S.P.D.T.) 	  SHAFT SHOWN IN FULL C.C.W POSITION	 300° rotation, mono unit with Rotaty SW S.P.S.T. 125V AC 1A S.P.D.T. 125V AC 1A  (SW)																														
RV24A03F-40D2 (Plastic Shaft & Bushing) 	  FULL C.C.W POSITION PCB Mounting Hole Detail 	 300° rotation, mono unit with Rotaty SW (SW) S.P.S.T. 125V AC 1A																														
TERMINAL LAYOUT RV24A01F, RV24A02F, RV24A03F																																
																																
SPECIFICATION (RV24A01F, RV24A02F, RV24A03F)																																
<table border="0"> <tr> <td>MECHANICAL</td><td>ELECTRICAL</td><td></td></tr> <tr> <td>TOTAL ROTATION ANGLE</td><td>300°±5°</td><td>linear taper (B) other tapers</td></tr> <tr> <td>ROTATION TORQUE</td><td>20~200 gf.cm</td><td>0.5W 0.25W</td></tr> <tr> <td>SHAFT STOP STRENGTH</td><td>6kgf.cm/Min.</td><td>500V 250V</td></tr> <tr> <td>SWITCH WORKING ANGLE</td><td>50°±10°</td><td>more than 100MΩ at 500V DC</td></tr> <tr> <td>SWITCH WORKING TORQUE</td><td>800gf.cm Max/</td><td>500V AC, 1 minute</td></tr> <tr> <td>SWITCH CIRCUIT</td><td>S.P.S.T., S.P.D.T.</td><td>less than 30mΩ</td></tr> <tr> <td></td><td></td><td>SWITCH CONTACT RESISTANCE</td></tr> <tr> <td></td><td></td><td>SWITCH RATING</td></tr> <tr> <td></td><td></td><td>125V AC, 1A</td></tr> </table>			MECHANICAL	ELECTRICAL		TOTAL ROTATION ANGLE	300°±5°	linear taper (B) other tapers	ROTATION TORQUE	20~200 gf.cm	0.5W 0.25W	SHAFT STOP STRENGTH	6kgf.cm/Min.	500V 250V	SWITCH WORKING ANGLE	50°±10°	more than 100MΩ at 500V DC	SWITCH WORKING TORQUE	800gf.cm Max/	500V AC, 1 minute	SWITCH CIRCUIT	S.P.S.T., S.P.D.T.	less than 30mΩ			SWITCH CONTACT RESISTANCE			SWITCH RATING			125V AC, 1A
MECHANICAL	ELECTRICAL																															
TOTAL ROTATION ANGLE	300°±5°	linear taper (B) other tapers																														
ROTATION TORQUE	20~200 gf.cm	0.5W 0.25W																														
SHAFT STOP STRENGTH	6kgf.cm/Min.	500V 250V																														
SWITCH WORKING ANGLE	50°±10°	more than 100MΩ at 500V DC																														
SWITCH WORKING TORQUE	800gf.cm Max/	500V AC, 1 minute																														
SWITCH CIRCUIT	S.P.S.T., S.P.D.T.	less than 30mΩ																														
		SWITCH CONTACT RESISTANCE																														
		SWITCH RATING																														
		125V AC, 1A																														