






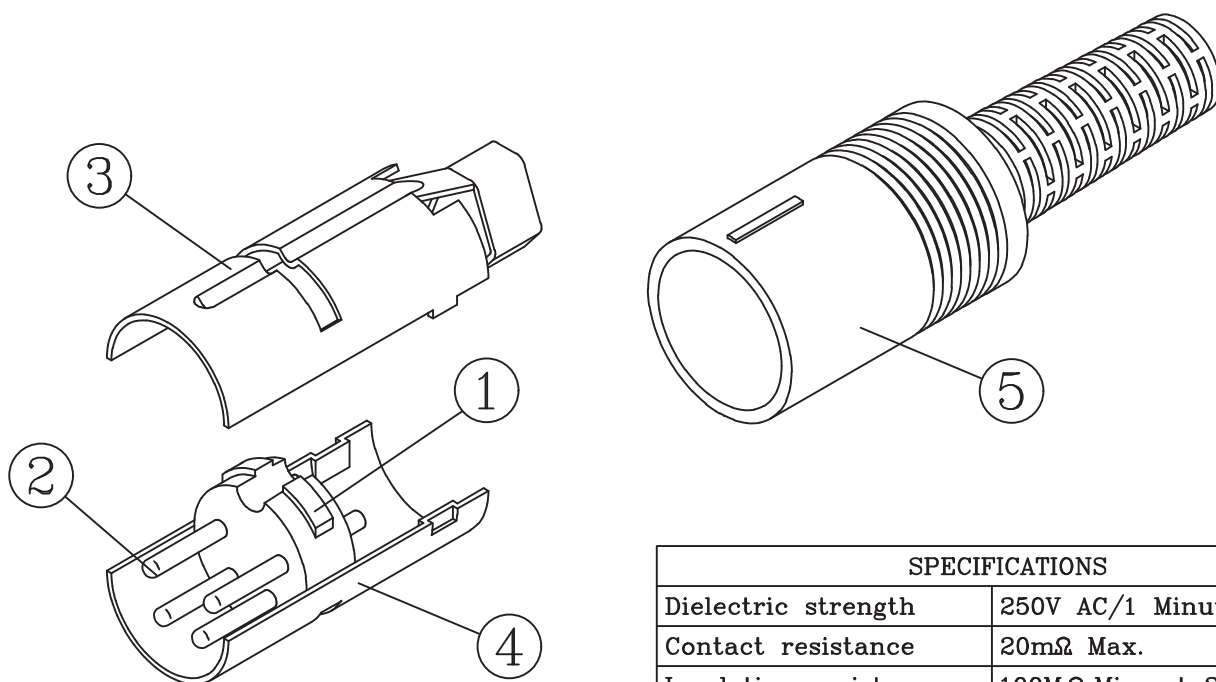


ARRANGEMENT OF CONTACTS

PARTS	3P	4P	5P			6P	7P	8P	
ANGLE	180°	216°	180°	240°	360°	240°	270°	270°	262°
POSITION OF VIEWS									

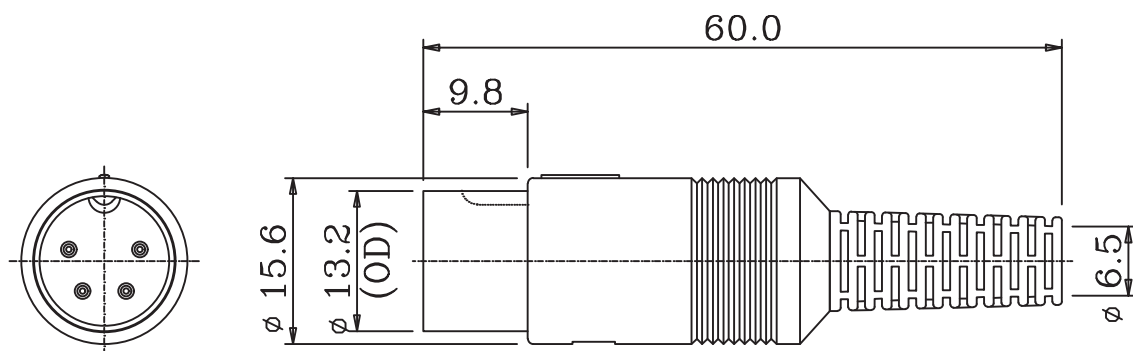

SPECIFICATIONS

Dielectric strength	250V AC/1 Minute
Contact resistance	20mΩ Max.
Insulation resistance	100MΩ Min. at 250V DC
Rating	1A 100V AC , 1A 12V DC




5	PLASTIC BODY	1	EVA	[UE633]		UL94V-0
4	COVER-B	1	BSR-H (0.5t)	[C2680R]	NICKEL	30-50u"
3	COVER-A	1	BSR-H (0.5t)	[C2680R]	NICKEL	30-50u"
2	CONTACT TERMINAL	4	BSR-H (1.5D)	[R-35]	SILVER PLATED	30-50u"
1	PLASTIC CORE	1	NYLON	[101]		UL94V-2
P/N	PART NAME	Q'TY	MATERIAL		PLATING	REMARKS
DATE	980828	SCALE	4 : 3	UNIT	M/M	MODEL NO.
CONNECTORS				B-9001		4 P
FILE NO.				HSP-BM-B9001-4P		216° PLUG
DESIGN		DRAFTSMAN		APPREVE		

ARRANGEMENT OF CONTACTS

PARTS	3P	4P	5P			6P	7P	8P	
ANGLE	180°	216°	180°	240°	360°	240°	270°	270°	262°
POSITION OF VIEWS									

SPECIFICATIONS

Contact resistance	20mΩ Max.
Dielectric strength	1,000V AC/1 Minute
Insulation resistance	100MΩ Min. at 500V DC
Rating	100V AC 2A

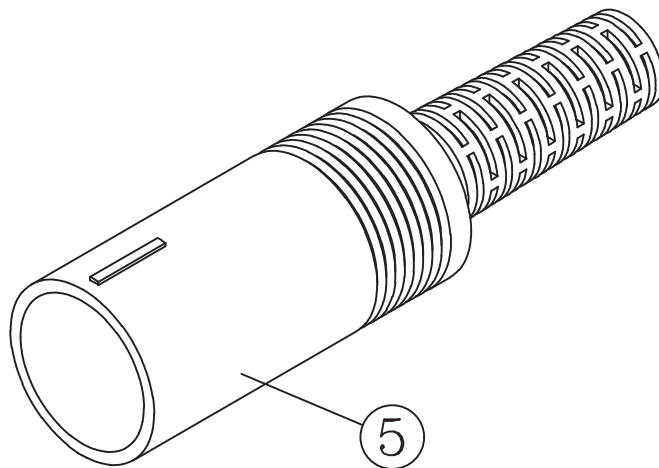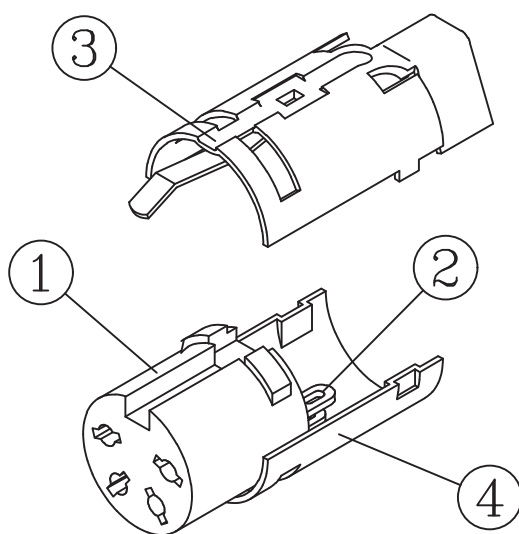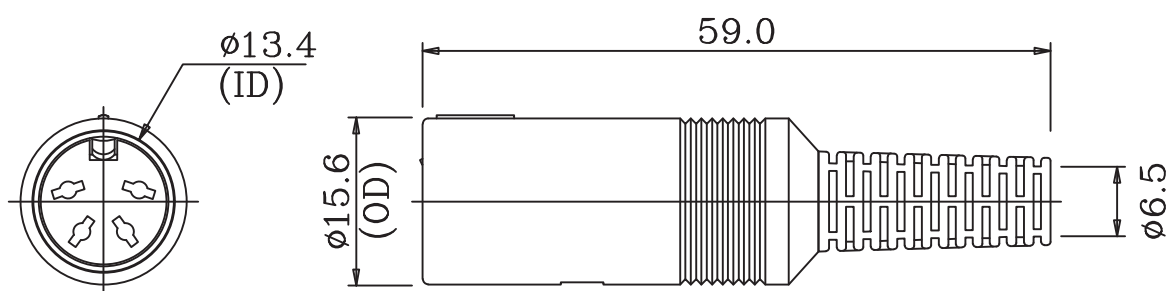

5	PLASTIC BODY	1	EVA	[UE633]		UL94HB
4	COVER-B	1	BSR-H (0.5t)	[C2680R]	NICKEL	30-50u"
3	COVER-A	1	BSR-H (0.5t)	[C2680R]	NICKEL	30-50u"
2	CONTACT TERMINAL	4	BSR-H (0.6t)	[C2680R]	TIN PLATED	30-50u"
1	PLASTIC CORE	1	NYLON	[101]		UL94V-2
P/N	PART NAME	Q'TY	MATERIAL		PLATING	REMARKS

DATE	980828	SCALE	4 : 3	UNIT	M/M	MODEL NO.		4	P	216°
CONNECTORS										JACK
FILE NO.										
DESIGN		DRAFTSMAN		APPREVE						