
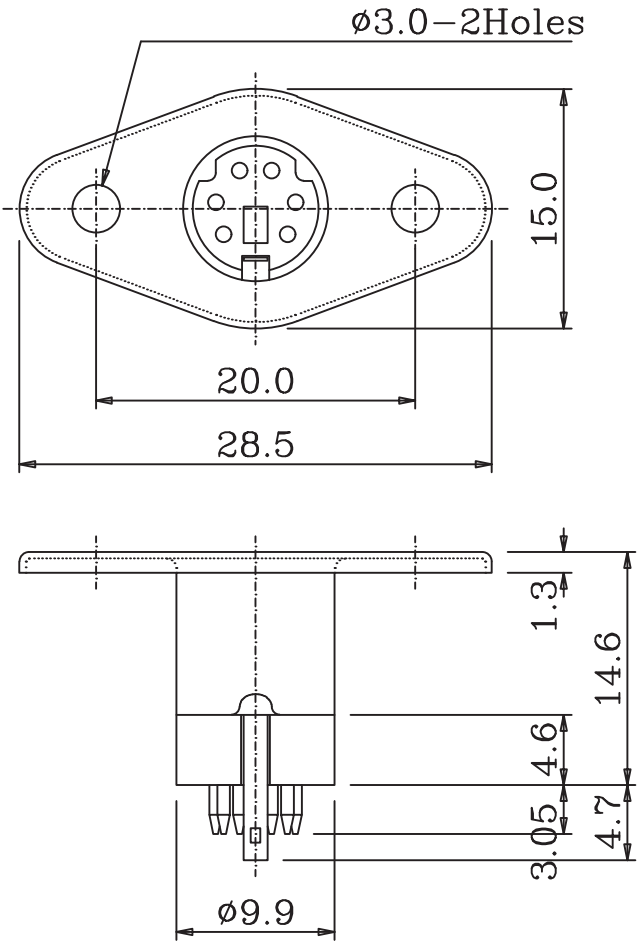


ARRANGEMENT OF CONTACTS						SPECIFICATIONS	
3P	4P	5P	6P	7P	8P	Contact resistance	30m Ω Max.
						Dielectric strength	250V AC/1 Minute
						Insulation resistance	50M Ω Min. at 250V DC
						Rating	100V AC 1A Max.; 12V DC 2A Max.

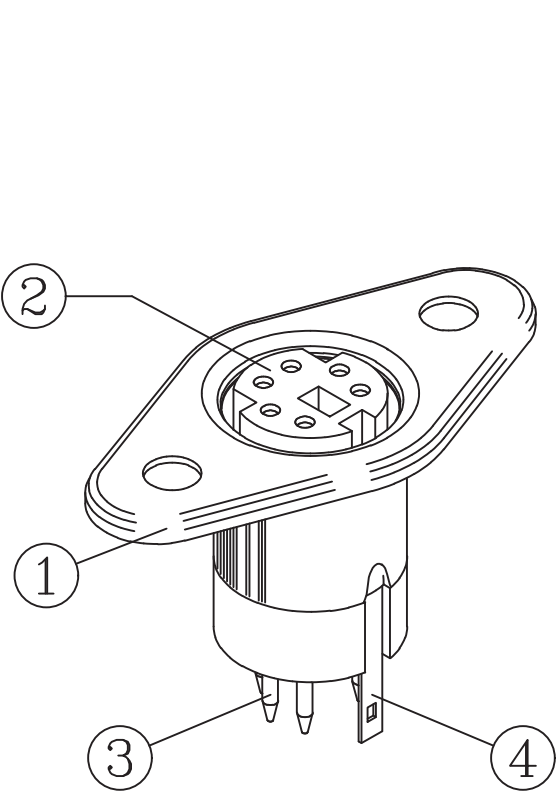

4	GROUNDING PIECE	1	BSR-H (0.2t) [C1519R-H]	NICKEL	30-50u”
3	CONTACT TERMINAL	6	BSR-H (0.2t) [C1519R-H]	TIN PLATED	30-50u”
2	PLASTIC CORE	1	ABS [777D]		UL94HB
1	METAL BODY	1	JIS G3141 SPCC-SD (0.4t)	NICKEL	30-50u”
P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS
DATE		SCALE 2 : 1	UNIT M/M	MODEL NO. A-3002	
MINIATURE CONNECTORS				6 P	JACK
FILE NO.					
DESIGN		DRAFTSMAN C. C. U.	APPREVE T. S. L.		