




120X120X38mm




General Specifications

Airflow	89.5~212.6 CFM
Static Pressure	3.9~19.8 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #22 AWG

Dimensions:mm

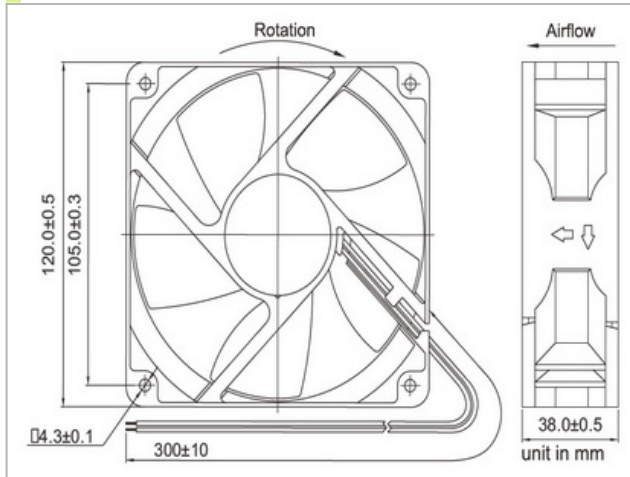

Performance

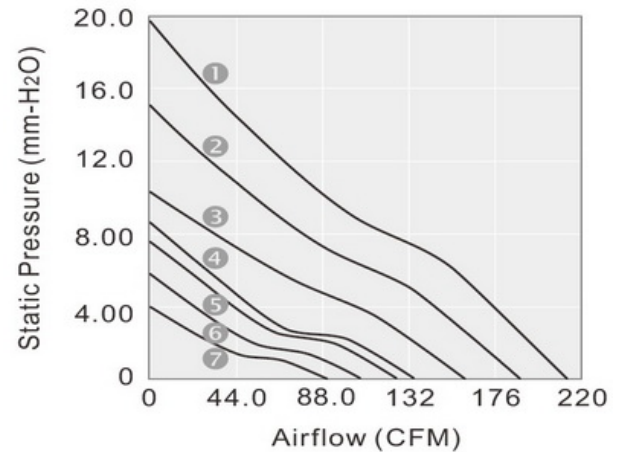

Specifications

Model NO.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Airflow	Static Pressure	Current	Power	Life at 40°C L10	P-Q Curve	Noise	Weight
		VDC	VDC	RPM	CFM	mm-H ₂ O	mA	W	HOURL		dBA	g
GD121238LB	2BALL	12	7~13.2	2000	89.5	3.9	320	3.84	80000	7	36.0	220
GD121238MB	2BALL	12	7~13.2	2400	107.0	5.8	400	4.80	80000	6	41.0	220
GD121238HB	2BALL	12	7~13.2	2800	125.5	7.6	660	7.92	75000	5	45.0	220
GD121238EB	2BALL	12	7~13.2	3000	135.0	8.6	830	9.96	65000	4	47.0	220
GD121238EB	2BALL	12	7~13.2	3500	161.1	10.4	750	9.00	65000	3	55.5	220
GD121238EB	2BALL	12	7~13.2	4100	189.2	15.1	1250	15.00	65000	2	59.0	220
GD121238UB	2BALL	12	7~13.2	4600	212.6	19.8	1750	21.00	65000	1	61.5	220
GD241238LB	2BALL	24	12~26.4	2000	89.5	3.9	150	3.60	80000	7	36.0	220
GD241238MB	2BALL	24	12~26.4	2400	107.0	5.8	250	6.00	80000	6	41.0	220
GD241238HB	2BALL	24	12~26.4	2800	125.5	7.6	310	7.44	75000	5	45.0	220
GD241238EB	2BALL	24	12~26.4	3000	135.0	8.6	410	9.84	65000	4	47.0	220
GD241238EB	2BALL	24	12~26.4	3500	161.1	10.4	410	9.84	75000	3	55.5	220
GD241238EB	2BALL	24	12~26.4	4100	189.2	15.1	620	14.88	65000	2	59.0	220
GD241238UB	2BALL	24	12~26.4	4600	212.6	19.8	860	20.64	65000	1	61.5	220
GD481238LB	2BALL	48	24~56.0	2000	89.5	3.9	120	5.76	80000	7	36.0	220
GD481238MB	2BALL	48	24~56.0	2400	107.0	5.8	140	6.72	80000	6	41.0	220
GD481238HB	2BALL	48	24~56.0	2800	125.5	7.6	180	8.64	75000	5	45.0	220
GD481238EB	2BALL	48	24~56.0	3000	135.0	8.6	210	10.08	65000	4	47.0	220
GD481238EB	2BALL	48	24~56.0	3500	161.1	10.4	210	11.52	65000	3	55.5	220
GD481238EB	2BALL	48	24~56.0	4100	189.2	15.1	340	16.32	65000	2	59.0	220
GD481238UB	2BALL	48	24~56.0	4600	212.6	19.8	470	22.56	60000	1	61.5	220