


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , - .
© COPYRIGHT - FGF ALL RIGHTS RESERVED.		

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	T2	REVISED PER ECO-11-004587	11MAR11	RK	HMR
	T3	REVISED PER ECO-17-014338	20APR2018	RS	DR

 WIRE RANGE	 E13288	 LR7189 Certified
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED

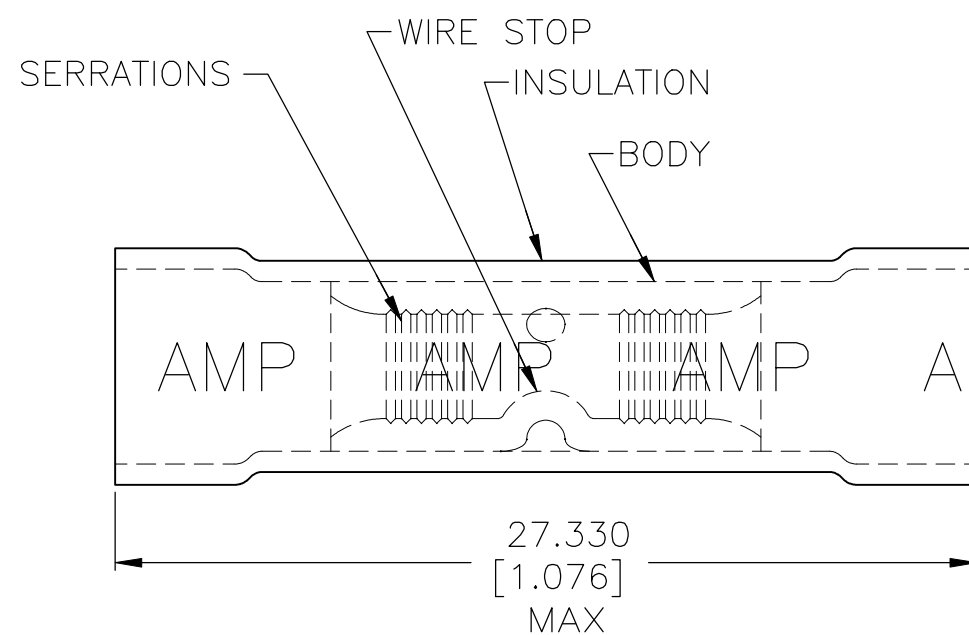

- 1 WIRE INSUL DIA,
2.667-3.556 [.105-.140]
- 2 NOTE DELETED

100	LOOSE PIECE, BOX	8-34070-1
2500	ON TAPE, REEL	1-34070-1
1000	LOOSE PIECE	34070
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: 105° C [221° F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M ELLIS19JUL95		TE Connectivity Ltd.						
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752		DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK C PRESNELL19JUL95	APVD S BORTNER19JUL95					NAME SPLICE, BUTT, PLASTI-GRIP WIRE SIZE, 22-16 AWG —		
				0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± 0.127[.005] 4 PLC ± — ANGLES ± —	PRODUCT SPEC UL486A-B	SIZECAGE CODEDRAWING NORESTRICTED TO A300779C-34070—							
				MATERIAL BODY, CU ASTM B 152 INSULATION: PVC	FINISH BODY: TIN PLATE PER ASTM B545 INSULATION: COLOR-RED					APPLICATION SPEC 114-2161			
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	VOLTAGE RATING: 600V MAX 1000V (FIXTURES OR SIGNS)	CIRCULAR MIL AREA: 0.26mm ² -1.65mm ² [509-3260] SOLID OR STRANDED		WEIGHT		CUSTOMER DRAWINGSCALE4:1SHEET1 OF 1REV T3						
FOR ORDER ENTRY	1-800-526-5142												