

2326951 (U06-CM1A5B-027-AS36)



RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

NOTES: 1. MATERIAL:

A, CONTACT: BRASS

B:SHELL: STAINLESS STEEL

C:HOUSING:LCP (BLACK)

2. ELECTRICAL:

A:RATED RATING: 3A ± 0.2

B:RATED VOLTAGE: 5V ± 0.3 DC





C:WORKING TEMPERATURE: -25°C-80°C

3. SALT SPRAY TEST: 5% SALT, 35°C 48H NO OXIDATION

4. LIFE TIME: 30TIMES/MINUTE, 8000CYCLES

5. PCB THICKNESS: 0.9mm±0.05

6. RESISTANCE: 56K

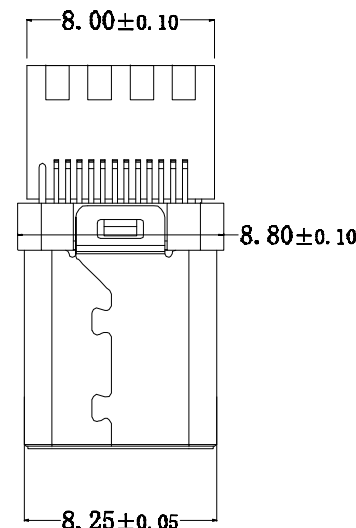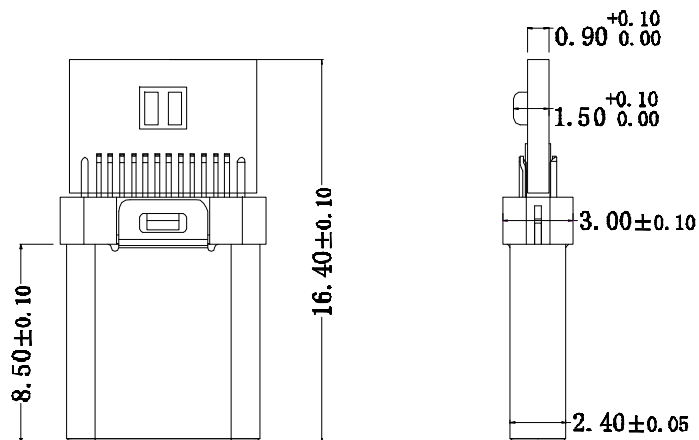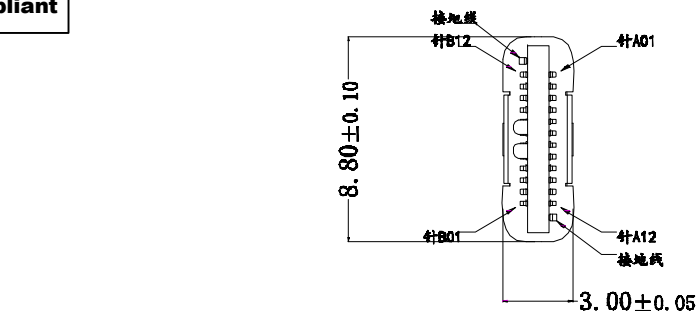

PART NO. INFORMATION

U06 - C M X X 5 B - 027-AS36

PORT TYPE C: TYPE C	PACKAGE T: TRAY B:BAG
GENDER F: FEMALE M: MALE	HOUSING COLOR 2: WHITE 5: BLACK 9: NATURE
CONTACT PLATED 1: GOLD FLASH 2: GOLD 3U" 3: GOLD 5U" 4: GOLD 10U" 5: GOLD 15U" 6: GOLD 30U"	HOUSING MATERIAL A: LCP B: PBT C: PA9T D: PA6T E: PA46 F: PA66

Top Willing Co., Ltd.

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.15	X.*	±	5°
.X	±	0.10	.X*	±	2°
.XX	±	0.05	.XX*	±	1°

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN:

I. L

DATE:

CHECKED:

C. W

DATE:

APPROVED:

C. W

DATE:

TITLE:

USB 3.1 C TYPE-C MALE CONNECTOR

MATERILA:

FINSH:

PART NO: 2326951

DWG NO:

U06-CM1A5B-027-AS36

SIZE: A4

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS

