


R REC LT SERIES

FEATURES

- Employment of suitable plastic materials to be applied to high temperature and various chemical solution
- Power consumption: 0.33W~0.45W
- Using at cooking appliances, air conditioners, audio equipments, domestic appliances, car control units, etc.

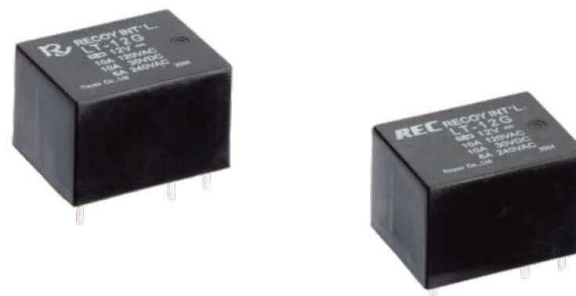

ORDERING INFORMATION

<u>LT</u>	—	<u>12</u>	<u>G</u>	<u>S</u>
1		2	3	4

1. Type
2. Coil Nominal Voltage
3. Contact Rating
G : 10A
4. Coil Sensitivity
NIL : 0.45W

NIH : 0.45W

S : 0.33W

COIL DATA(0.45W,0.33W, at 25°C)

Coil Nominal Voltage (VDC)	Resistance Tol.±10% (Ohms)		Nominal Current (mA)		Maximum Pick Up Voltage (V)	Minimum Drop Out Voltage (V)
	0.45W	0.33W	0.45W	0.33W		
3	20	27	150.0	111.1	2.1	0.3
5	56	75	89.2	62.5	3.5	0.5
6	80	110	75.0	54.5	4.2	0.6
9	180	250	50.0	36.0	6.3	0.9
12	320	440	37.5	30.0	8.4	1.2
24	1,280	1,750	18.7	13.4	16.8	2.4
48	4,600		10.4		33.6	4.8


RAYEX ELEC.ISSUED RECOY INT'L.

CONTACT RATING



Resistive (Cos.θ = 1)	AC 120V / DC 30V	10A
	AC 240V	6A
	AC 120V / DC 30V	6A

Inductive (Cos.θ = 0.4)	AC 120V / DC 30V	0A
	AC 240V	3A


DIMENSIONS(±0.2mm)

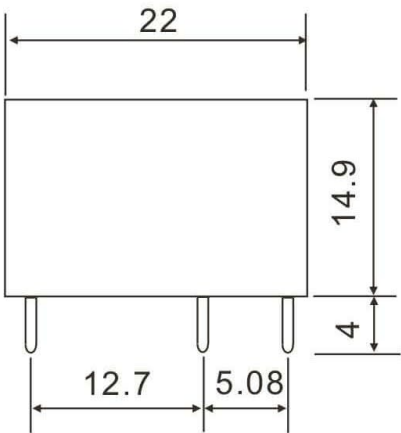

WIRING DIAGRAM
(BOTTOM VIEW)

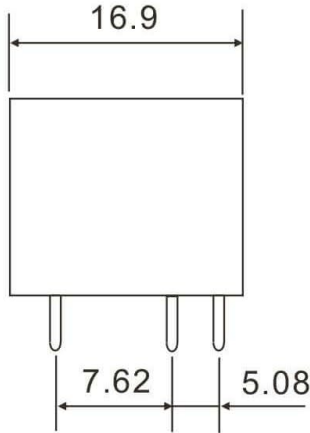

P.C.B LAYOUT
(BOTTOM VIEW)

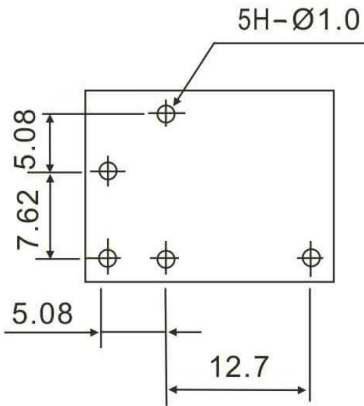

GENERAL DATA

Insulation Resistance	100 MΩ Min. (DC 500V)
Dielectric Strength	750 VAC, 50/60Hz between contact.
	1,500 VAC, 50/60Hz between all elements.
Contact Material	Ag Allov.

Contact Resistance	100 milliohms max. (initial value)
Shock Resistance	Malfunction: 10G(11ms) ; Destructive: 100G(6ms)
Vibration Resistance	Malfunction: 10 to 55 Hz. at Double Amplitude of 1.5 mm
	Destructive: 10 to 55 Hz. at Double Amplitude of 1.5 mm
Operation Time	10 ms max.
Release Time	10 ms max.
Temperature Range	- 25°C ~ + 60°C
Expected Life	With operation rate 30/min. Mechanical - 10,000,000 operations min. Electrical - 100,000 operations min. at rated load.
Weight	10 grams

RAYEX ELEC.ISSUED RECOY INT'L.