


172X150X51mm




General Specifications

Airflow	106~235CFM
Housing	Die Cast Aluminum Painted Black Or Natural Color
Impeller	Plastic With Fiber Glass Filled UI 94V-0
Motor Type	Shaded Pole, Impedance Protected
Connecting	Terminal & Wire Leads

Dimensions:mm

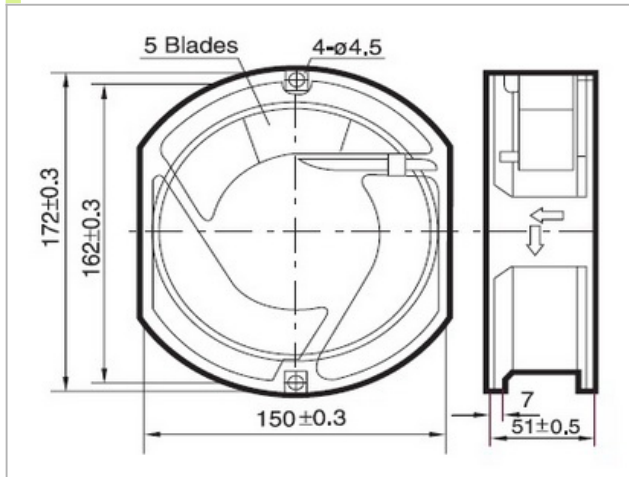

Performace

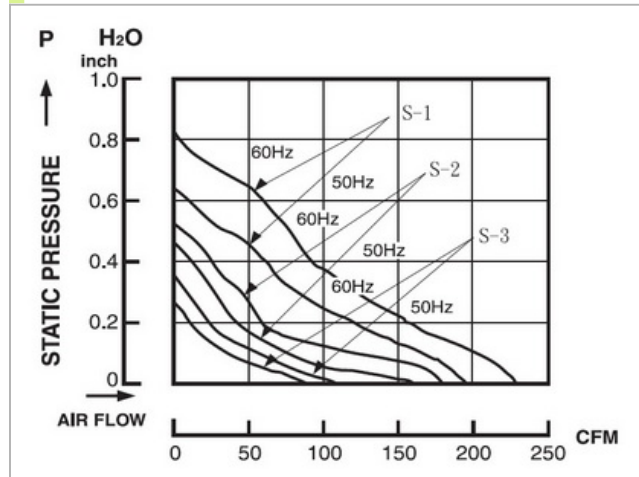

Specifications

Model NO.	Bearing	Rated Voltage	Frequency	Speed	Airflow	Static Pressure	Current	Power	Noise
		VAC	HZ	RPM	CFM	Inch-H2O	A	W	dBA
6C115ABSL	2BALL	110/120	50/60	2800/3100	190/235	0.63/0.79	0.50/0.45	38/35	50/45
6C115ABST	2BALL	110/120	50/60	2800/3100	190/235	0.63/0.79	0.50/0.45	38/35	50/45
6C230ABSL	2BALL	220/240	50/60	2800/3100	190/235	0.63/0.79	0.23/0.21	32/31	50/45
6C230ABST	2BALL	220/240	50/60	2800/3100	190/235	0.63/0.79	0.23/0.21	32/31	50/45
6C115ABSL-L	2BALL	110/120	50/60	2100/1900	110/106	0.40/0.31	0.35/0.33	22/21	33/30
6C230ABSL-L	2BALL	220/240	50/60	1900/1800	110/106	0.40/0.31	0.15/0.12	22/19	33/30