
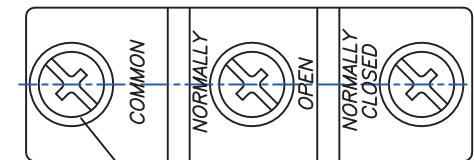
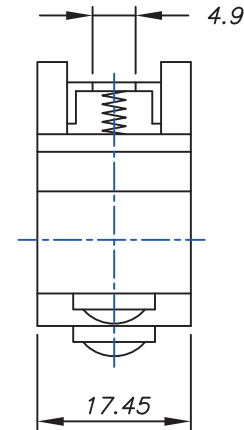


Date	Rev.	Description

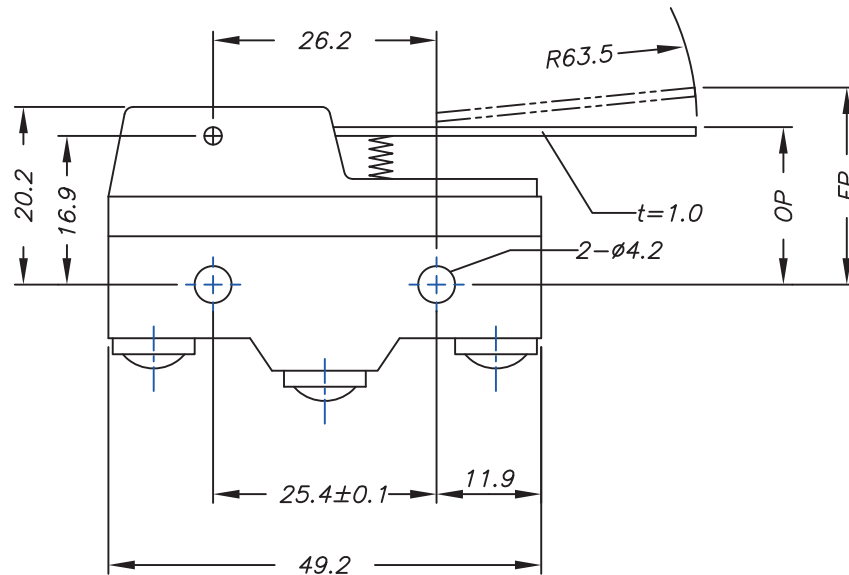

3-M4x5.0
Terminal screw
with toothed lock
washer

TOLERANCE	
ANGULAR	LINEAR
0.000*±0.25*	0.000±0.005
0.00*±0.5*	0.00±0.10
0.0*±1*	0.0±0.20
0*±2*	0±0.50

CHARACTERISTICS	Rating	15A 125VAC or 250VAC
Contact Resistance : 15mΩ (initial)	Terminal	SCREW
Insulation Resistance : 100MΩ min. (at 500 VDC)		
Dielectric Strength: 1,000 VAC, 50/60Hz for 1 minute between	OF max. RF min. PT max. OT min. MD max. FP max. OP	70g 14g 10mm 5.6mm 1.27mm 28.2mm 19±0.8mm
Mechanically Service Life : 1,000,000 operations min.		
Electrically Service Life : 100,000 operations min.		

DCC. NO.
A4 DRAWING NO.

GOLDSUN ELECTRONICS CO., LTD.

PART NO. 2351407 Rev. 1

Description :

UNIT mm SCALE SHEET 1 OF 1 CAS No:
ERN No:

DRAWN : Jay

VERIFY : Arthur / Sam