



## S2011 Series

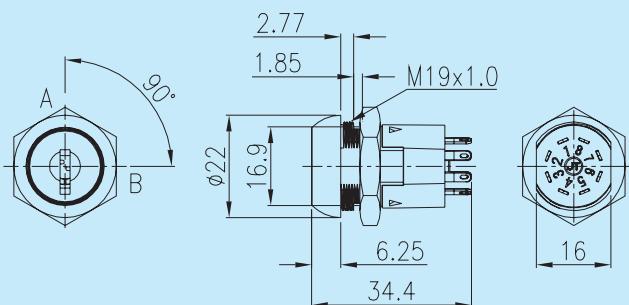

Unit: mm

Recommended hole size



### DESCRIPTION

- . Zinc alloy die cast housing and cylinder.
- . Bright nickel plated standard.
- . 4 disc tumbler mechanism.
- . Brass keys, nickel plated.
- . Key withdraw in different positions available.
- . Golden plated contacts and terminals.
- . Hex nut or speed clip mounted.
- . All keyed alike or 20 combinations standard.
- . 20 combinations available.

### SPECIFICATION

- . Contact Rating: 4A 125VAC, 2A 250VAC.  
4A 28VDC
- . Contact Resistance: 50Milli-Ohms Max.
- . Insulation Resistance:  $10^9$  Ohm Min.
- . Dielectric Strength: 1000 VAC -1 Minute.

# MODEL / SWITCH AND FUNCTION FOR S2011

LOCK CONFIGURATION CAS VIEWED FROM KEY ENC	MODEL NO. NO. POLES	CONNECTED TERMINALS					KEY PULL POSSIBLE THESE POS.
		POS.1	POS.2	POS.3	POS.4	POS.5	
POS.1  45° INDEXING	A SP B DP	8-1 8-1 4-5	1-2 1-2 5-6	2-3 2-3 6-7			POS.1
POS.1  45° INDEXING	C SP D DP	8-1 8-1 4-5	1-2 1-2 5-6	2-3 2-3 6-7			POS.3
POS.1  45° INDEXING	E SP F DP	8-1 8-1 4-5	1-2 1-2 5-6	2-3 2-3 6-7			POS.1 POS.3
POS.1  45° INDEXING	G SP H DP	8-1 8-1 4-5	1-2 1-2 5-6	7-8 7-8 3-4			POS.1
POS.1  45° INDEXING	I SP J DP	8-1 8-1 4-5	1-2 1-2 5-6	7-8 7-8 3-4			POS.1 POS.2 POS.3
POS.1  45° INDEXING	K SP	8-1	1-2	2-3	7-8	6-7	POS.1
POS.1  45° INDEXING	L SP	8-1	1-2	2-3	7-8	6-7	POS.3 POS.5
POS.1  45° INDEXING	M SP	8-1	1-2	2-3	7-8	6-7	POS.1 POS.3 POS.5
POS.1  90° INDEXING	N SP O DP	8-1 8-1 4-5	1-3 1-3 5-7				POS.1
POS.1  90° INDEXING	P SP Q DP	8-1 8-1 4-5	1-3 1-3 5-7				POS.2
POS.1  90° INDEXING	R SP S DP	8-1 8-1 4-5	1-3 1-3 5-7				POS.1 POS.2
POS.1  45°/90° INDEXING	T SP	8-1	1-3	7-8	6-7		POS.1
POS.1  45°/90° INDEXING	U SP	8-1	1-3	7-8	6-7		POS.2 POS.4
POS.1  45°/90° INDEXING	V SP	8-1	1-3	7-8	6-7		POS.1 POS.2 POS.4
POS.1  45°/90° INDEXING	Y SP	7-1	1-2	2-3	6-7		POS.1
POS.1  45°/90° INDEXING	Z SP	7-1	1-2	2-3	6-7		POS.3 POS.4
POS.1  45°/90° INDEXING	AI SP	7-1	1-2	2-3	6-7		POS.1 POS.3 POS.4
POS.1  90° INDEXING	BI SP	7-1	1-3	6-7			POS.1
POS.1  90° INDEXING	CI SP	7-1	1-3	6-7			POS.2 POS.3
POS.1  90° INDEXING	DI SP	7-1	1-3	6-7			POS.1 POS.2 POS.3