

YS6V-U SERIES



Input: 85-265VAC 50/60Hz
Output Voltage: 5V-36V DC
Rated Power: 6W max

Features

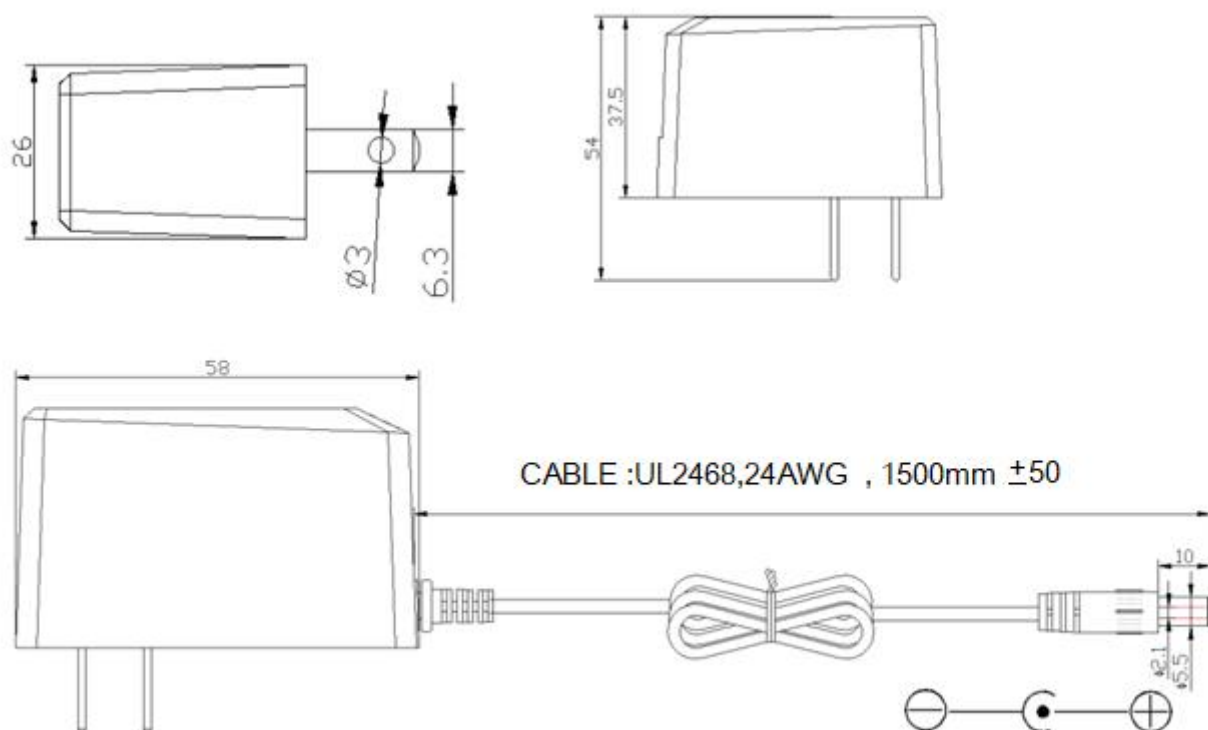
Univeral AC input/ Full range
 Energy efficiency level VI
 Leakage Current: < 0.25mA
 Extremely low leakage current
 Protection: Over load/Over voltage/Short circuit
 Withstand voltage : 3KV
 Life Warranty: 3 years

Application

Digital equipment
 Consumer electronic devices
 Telecommunication devices
 Office facilities
 Industrial equipments



■ Dimensions and Installation

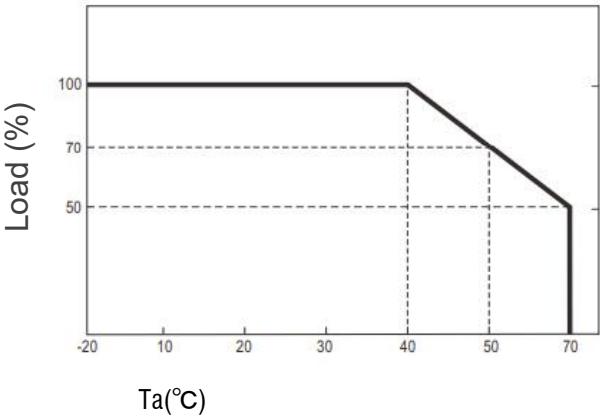


YS6V-U SERIES

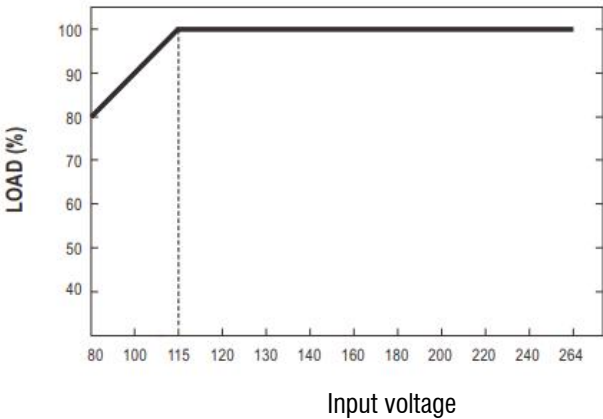
MODEL DETAIL SPEC.		YS6V-0501200U	YS6V-0601000U	YS6V-0750800	YS6V-0900660	YS6V-1200500	YS6V-2400250
INPUT	Input Voltage:	85-265VAC					
	Input Frequency:	50/60Hz					
	Inrush Current:	15A/115VAC 30A/230VAC					
	AC Current:	0.2A/115VAC 0.21A/230VAC					
	Leakage Current:	< 0.25mA/240VAC					
	Efficiency:	75%	77%	80%	80%	81%	82%
OUTPUT	DC Voltage:	5V	6V	9V	12V	15V	24V
	Rated Current:	1.2A	1A	0.66A	0.5A	0.4A	0.25A
	Rated Power:	6W	6W	6W	6W	6W	6W
	Voltage Tolerance:	±5.0%	±5.0%	±5.0%	±5.0%	±5.0%	±5.0%
	Ripple and Noise:	75mVp-p	75mVp-p	90mVp-p	120mVp-p	120mVp-p	200mVp-p
	Line Regulation:	±3%					
	Load Regulation:	±5%	±5%	±5%	±5%	±5%	±5%
	Setup, Rise, Hold Up time:	500ms, 30ms/120ms 230VAC 1000ms, 30ms/25ms 115VAC at full load					
ENVIRONMENTAL	Operating Temperature:	-20 ~ +70 (Refer to "Derating Curve")					
	Storage Temp:	-40°C ~ 85°C					
	Storage Humidity:	10 ~ 95% RH					
	Working Humidity:	20 ~ 95% RH non-condensing					
PROTECTION	Over Load:	105% -150% rated output power					
		Protection type: Hiccup mode, recovers automatically after fault condition is removed					
	Over Voltage:	105% -130% rated output power					
		Protection type: Shut down o/p voltage, re-power on to recover					
	Over Temperature:	Shut down o/p voltage, re-power on to recover					
SAFETY & EMC	Safety Regulations:	UL62368-1 approved					
	Withstand Voltage:	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC					
	Isolation Resistance:	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH					
	EMC Emission:	FCC Part15/CISPR22, CAN ICES-3(B) NMB-3(B), Class B					
	EMC Immunity:	FCC Part15/CISPR22, CAN ICES-3(B) NMB-3(B), Class B					
OTHER	MTBF:	500Khrs min. MIL-HDBK-217F(25°C)					
	Size:	58*26*35mm					
	Weight:	70g / pcs					
	Packaging:	100PCS/CTN					

YS6V-U SERIES

Deduction curve
and temperature




Minus output
and input voltage curves










■ DC output plug

Standard plug: D1M

D1M	Pin Assignment
  	
	Outside  Inside  -V not connected to AC FG(standard) -V connected to AC FG(optional)






YS6V-U SERIES

Optional DC plug: (Available in customized cable or quick adapter)

Tuning Fork Style			Type No.	A	B	C	Quick Adapter Accessory	
				OD	ID	L		
 	 (Straight)	D1I	5.5	2.1	9.5	Available (Current rating: 7.5A max.)		
		D1L	5.5	2.5	9.5			
		D1M	5.5	2.1	11.0			
	 (Right-angled)	D1IR	5.5	2.5	9.5			
		D1JR	5.5	2.1	11.0			
		D1LR	5.5	2.5	9.5			
		D1MR	5.5	2.5	11.0			
Barrel Style			Type No.	A	B	C	Quick Adapter Accessory	
				OD	ID	L		
 	 (Straight)	D2I	5.5	2.1	9.5	None		
		D2J	5.5	2.1	11.0			
		D2L	5.5	2.5	9.5			
		D2M	5.5	2.1	11.0			
	 (Right-angled)	D2IR	5.5	2.5	9.5			
		D2JR	5.5	2.1	11.0			
		D2LR	5.5	2.5	9.5			
		D2MR	5.5	2.5	11.0			
Lock Style			Type No.	A	B	C	Quick Adapter Accessory	
				OD	ID	L		
  	D2S(S761K)	5.53	2.03	12.06	None			
	D2K(761K)	5.53	2.54	12.06				
	D2C(S760K)	5.53	2.03	9.52				
	D2D(760K)	5.53	2.54	9.52				
Center Pin Style			Type No.	A	B	C	D	Quick Adapter Accessory
				OD	ID	L	Center Pin	
   EIAJ equivalent	D4A	5.5	3.4	11.0	1.0	Available (Current rating: 7.5A max.)		
	D4B	6.5	4.4	11.0	1.4			
	D4C	7.4	5.1	11.0	0.6			
Min. Pin Style			Type No.	A	B	C	Quick Adapter Accessory	
				OD	ID	L		
   EIAJ equivalent	D3A	2.35	0.7	11.0	Available (Current rating: 5A max.)			
	D3B	4.0	1.7	11.0				
	D3C	4.75	1.7	11.0				

YS6V-U SERIES

Optional DC plug: (Available in customized cable or quick adapter)

Min.Din 3Pin with Lock (male)	Type No.	Pin Assignment		Quick Adapter Accessory
		PIN No.	Output	
   KYCON KPPX-3P equivalent	M6B	1	+Vo	Available (Current rating: 7.5A max.)
		2	-Vo	
		3	+Vo	
Min.Din 4Pin with Lock (male)	Type No.	Pin Assignment		
		PIN No.	Output	
   KYCON KPPX-4P equivalent	M7B	PIN No.	Output	Available (Current rating: 7.5A max.)
		1	+Vo	
		2	-Vo	
		3	-Vo	
		4	+Vo	
Min.Din 4Pin with Lock (female)	Type No.	Pin Assignment		
		PIN No.	Output	
   KYCON KPJX-CM-4S equivalent	M7BF	PIN No.	Output	None
		1	+Vo	
		2	-Vo	
		3	-Vo	
		4	+Vo	
DIN 5Pin (male)	Type No.	Pin Assignment		
		PIN No.	Output	
  	M1B	PIN No.	Output	Available (Current rating: 7.5A max.)
		1	-Vo	
		2	-Vo	
		3	+Vo	
		4	-Vo	
		5	+Vo	
Stripped and tinned leads	Type No.	Pin Assignment		
		PIN No.	Output	
	by customer	1	+Vo	None
		2	-Vo	