

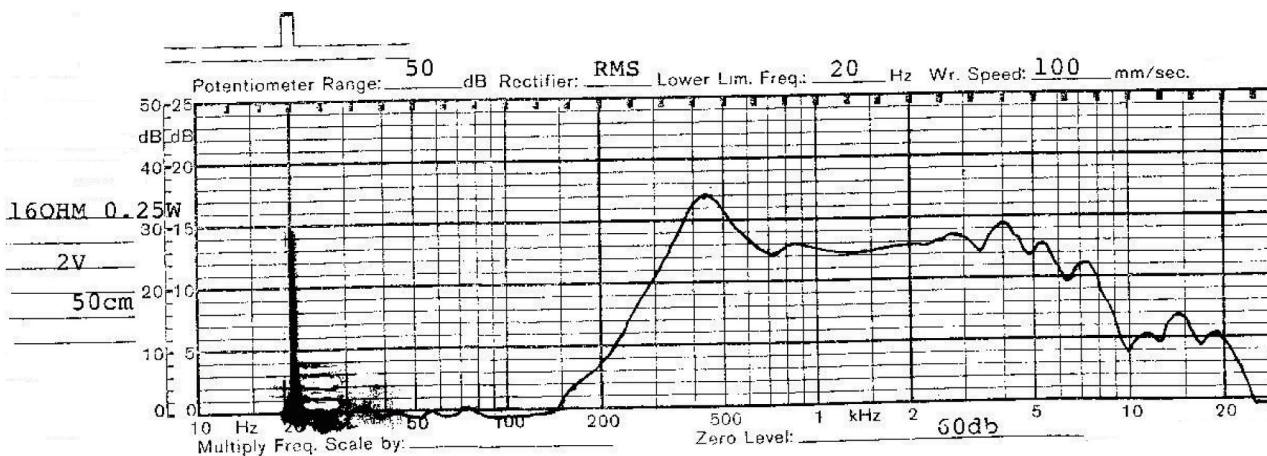
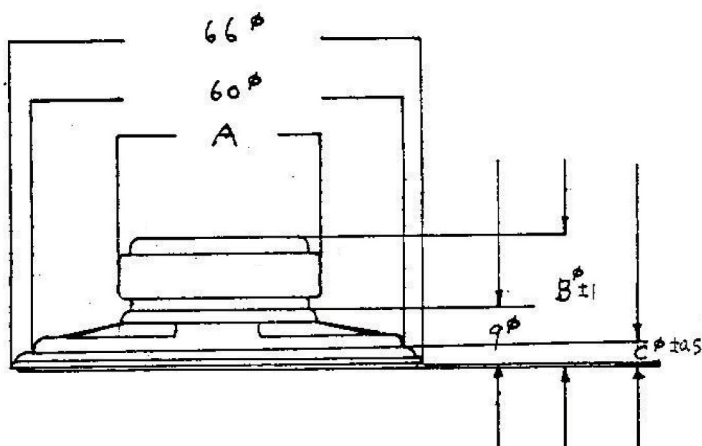


Nominal Size	66 mm.		
Impedance	$16 \Omega \pm 15\%$	at. 800 Hz.	1 /v.
Resonance fo	$380 \text{ Hz.} \pm 76 \text{ Hz.}$	fo Hz.	1 /v.
S. P. Level	$84 \text{ dB/w} \pm 3 \text{ dB}$	0.25 w.	50cm.
Response	fo Hz~ 9K Hz -10 dB MAX	1K .1.4K .1.7K . 2k	Hz-Av
Input Power	Nominal input 0.25 w.	Handling Capacity	0.5 W.
Operation	Must be normal at program Source 0.25 w.		
Buzz. Rattle. etc.	Must be normal at Sine Wave 1.41 v.		
Flux Dewsity	6000 Gauss	12. Total Flux	12000 Maxwell/min
Magnet	Freeite 32*18*6 mm	16.5 gr	0.58 Oz

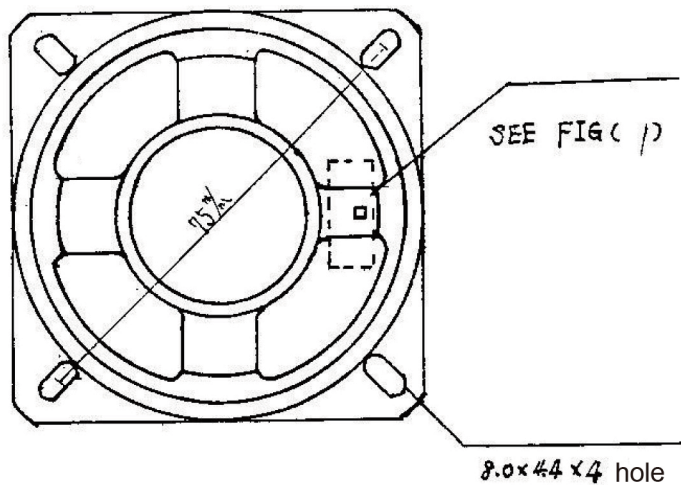

GOLDSUN ELECTRONICS CO., LTD.

JAMECO NO.	31959	GOLDSUN NO.	TQ-066F-ROHS(BOX)
Description	"SQUARE FERRITE SPEAKER 16 OHM 0.25W D66xH20mm"		Rev. 1
UNIT:	SCALE:	SHEET 1 OF 1	CAS No: ERN No:
mm			



02	32	20.5	3	32x18x6	0.58
PART NO.	A	B	C	MAG SIZE	02

GOLDSUN ELECTRONICS CO., LTD.

JAMECO NO. 31959		GOLDSUN NO. TQ-066F-ROHS(BOX)	
Description "SQUARE FERRITE SPEAKER 16 OHM 0.25W D66xH20mm"			Rev. 1
UNIT: mm	SCALE:	SHEET 1 OF 1	CAS No: ERN No: