

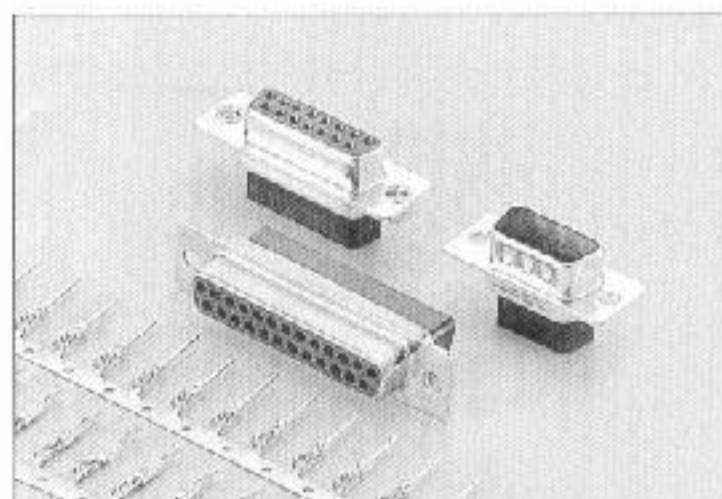


1005 Series

D-SUB Crimp Type


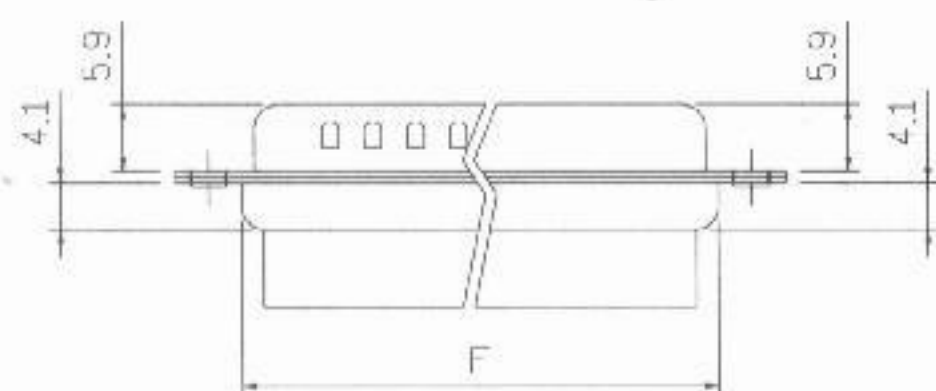


(ROHS)

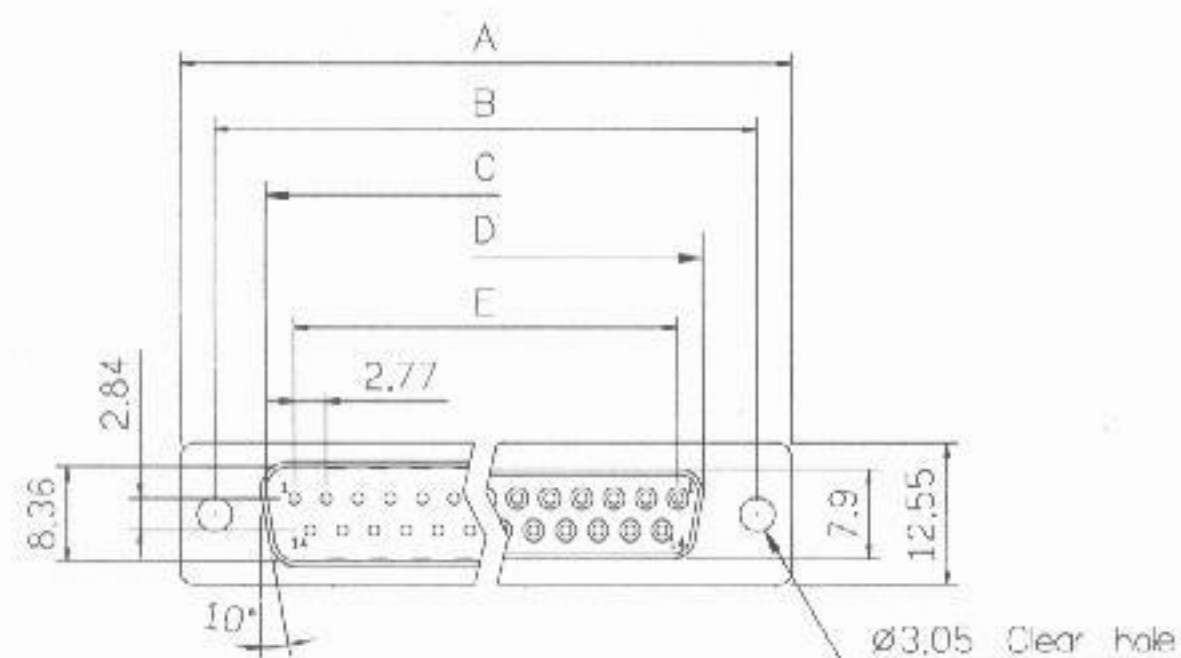


Dimensions


Positions	A	B	C	D	E	F
9	30.81	24.99	16.92	16.33	11.08	19.20
15	39.14	33.32	25.50	24.66	19.39	27.70
25	53.04	47.04	38.96	38.38	33.24	41.10
37	69.32	63.50	55.42	54.84	49.86	57.30

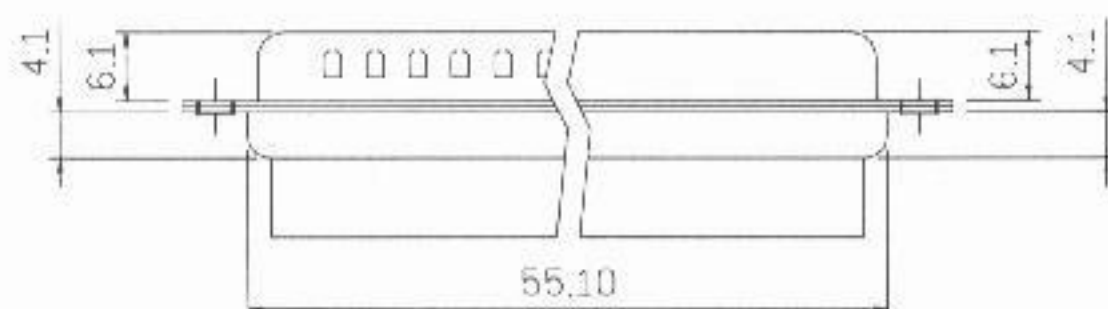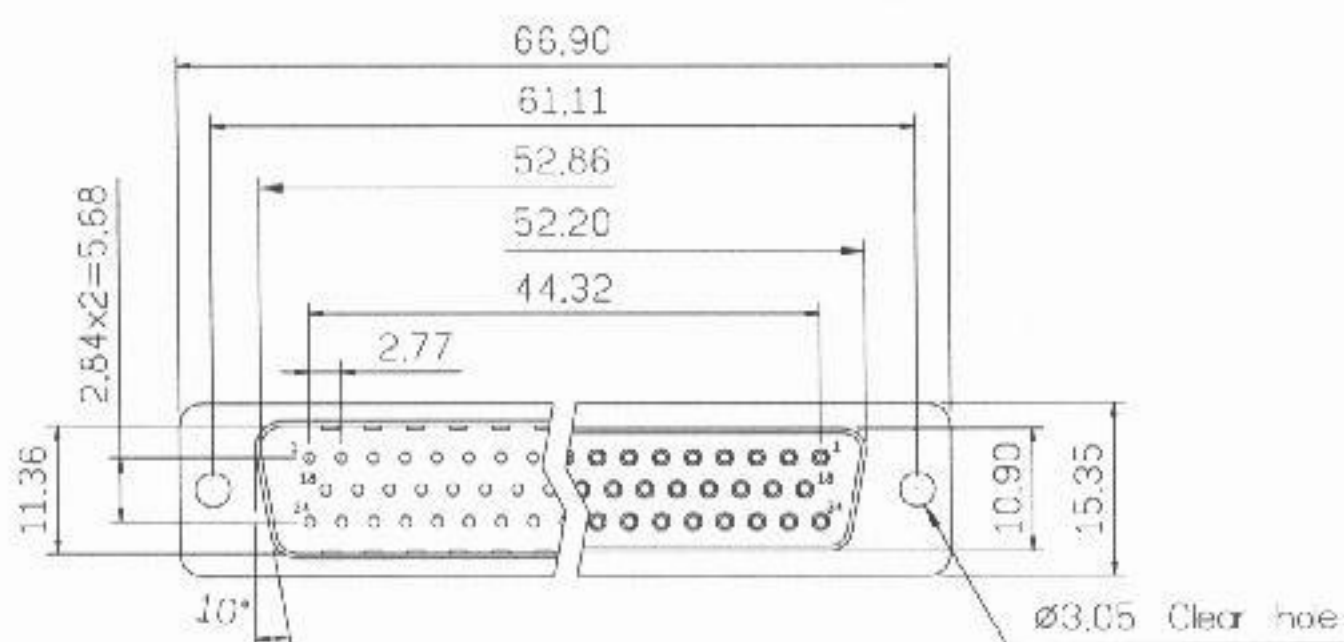

50 Positions

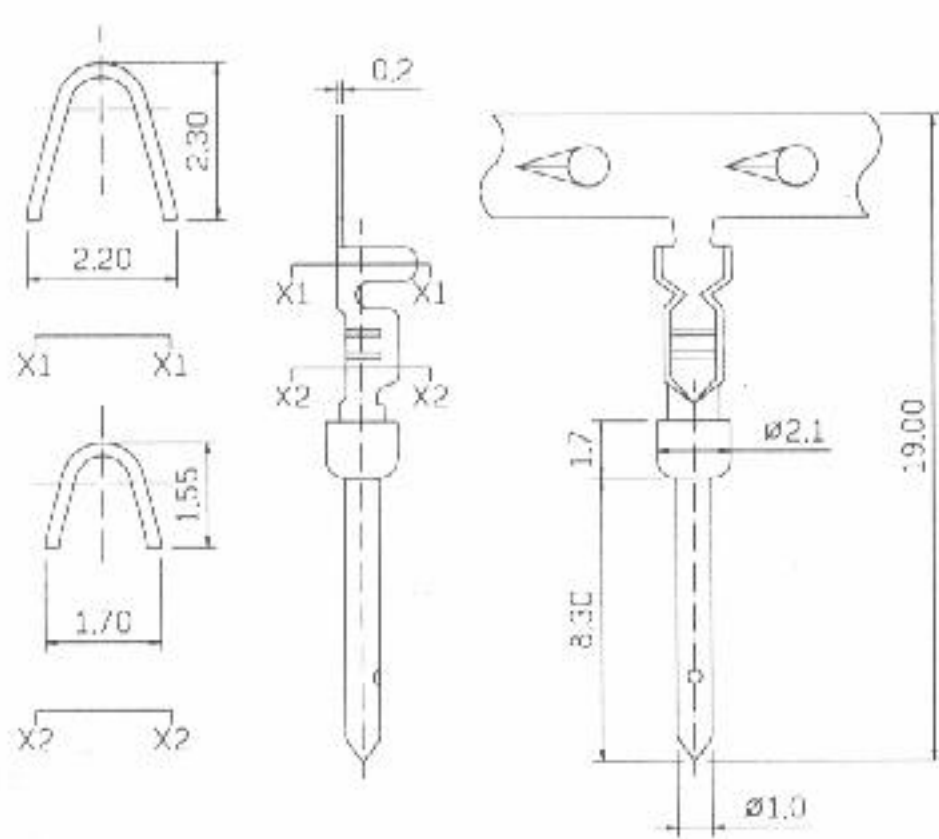

1.0 Crimp Pin Male

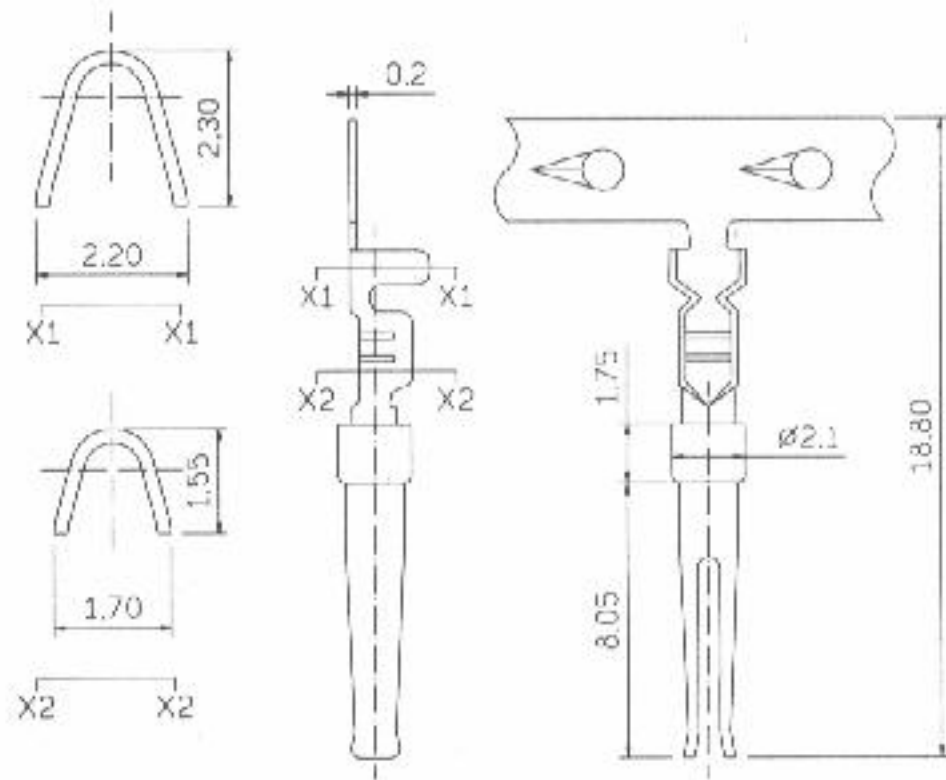

1.0 Crimp Pin Female

Product Specification

Material

Insulator : Glass-Filled Thermoplastic PBT, UL94V-0 rated

Shell : Steel, 100u" Tin Over 50u" min Nickel.

Clinch Nut: Brass, 100u" min Nickel Plated,

Screwlock : Brass, 100u" min Nickel Plated.

Electrical

Insulation Resistance : 1000 megohms at 500 VDC

Dielectric Withstanding Voltage : 1000 VAC/rms 60Hz for 1 minute