


1/4 Hex Male-Female Standoff

Jameco Part# 77594

Jameco Electronics

1-800-831-4242

Hex Length Table		
✓ FCXXXX	Length (L)	
FC4530	1/4	
FC4531	5/16	
FC4532	3/8	
FC4533	7/16	
FC4534	1/2	
FC4535	9/16	
FC4536	5/8	
FC4537	11/16	
FC4538	3/4	
FC4539	13/16	
FC4540	7/8	
FC4541	15/16	
FC4542	1	
FC4543	1-1/16	
FC4544	1-1/8	
FC4545	1-3/16	
FC4546	1-1/4	
FC4547	1-5/16	
FC4548	1-3/8	
FC4549	1-7/16	
FC4550	1-1/2	
FC4551	1-9/16	
FC4552	1-5/8	
FC4553	1-11/16	
FC4554	1-3/4	
FC4555	1-13/16	
FC4556	1-7/8	
FC4557	1-15/16	
FC4558	2	
FC4559	2-1/8	
FC4560	2-1/4	
FC4561	2-3/8	
FC4562	2-1/2	
FC4563	2-5/8	
FC4564	2-3/4	
FC4565	2-7/8	
FC4566	3	
FC4567	3-1/4	
FC4568	3-1/2	
FC4569	3-3/4	
FC4570	4	

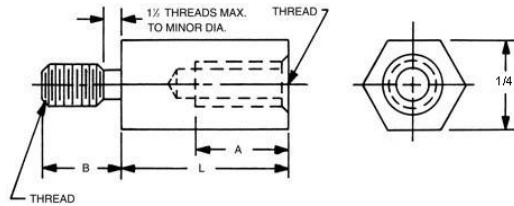

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

Thread			
Short lengths, 'A' tapped to maximum depth			
✓ Thread Code (XXX)	Depth (A)	Length (B)	
	256	3/16	5/32
440	1/4	3/16	
632	3/8	1/4	
832	7/16	3/8	

Material		
Material Code (XX)		
✓ A	Aluminum	
B	Brass	
S	Steel	
SS	Stainless Steel	
N	Nylon	

Tolerances
Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

Compatible Finish		
✓ A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	

Jameco Electronics

1-800-831-4242