

AC Power Inlet with 0.250" Terminals


Date	Rev.	Description

SPECIFICATIONS :





1. Rating : 10A 250VAC / 15A 250VAC
2. Dielectric Strength : AC 2000V 1 Minute
3. Insulation Resistance :
MORE THAN 100M Ω at DC 500V
4. Certification : UL , VDE , ENEC , CCC



MOUNTING HOLE



PANEL THICKNESS:
 $0.8 - 1.2t (X=20.3)$
 $1.3 - 2.0t (X=20.5)$
 $2.1 - 3.0t (X=20.7)$

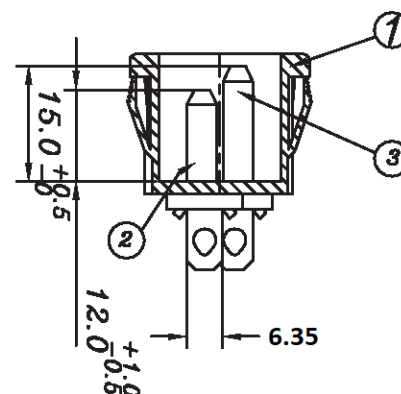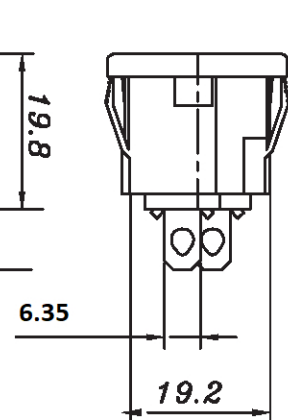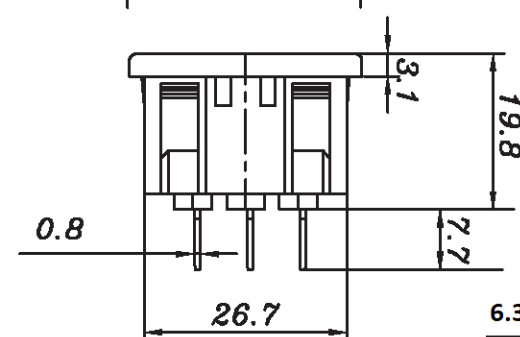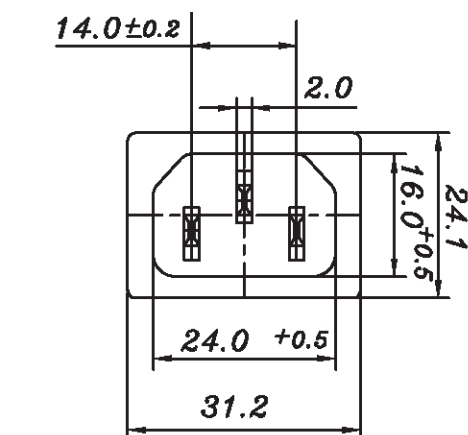

1	BODY	1	NYLON #66	94V-2	or 94V-0	Q101-0E01
2	CONTACT	2	Bsp1-1/2H	T=2.0	Sn-PLATED	Q101-0A02
3	GROUND CONTACT	1	Bsp1-1/2H	T=2.0	Sn-PLATED	Q101-0A03

GOLDSUN ELECTRONICS CO., LTD.

PART NO. **147109** Rev. **1**

Description :

UNIT mm SCALE SHEET 1 OF 1 CAS No: ERN No:

DRAWN : Jay

VERIFY : Arthur / Sam

DCC. NO.
A4 DRAWING NO.