


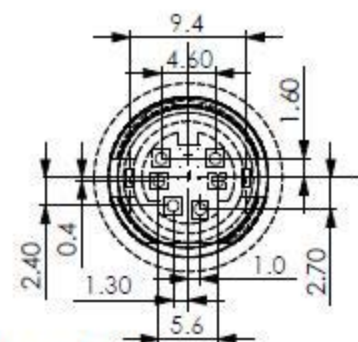
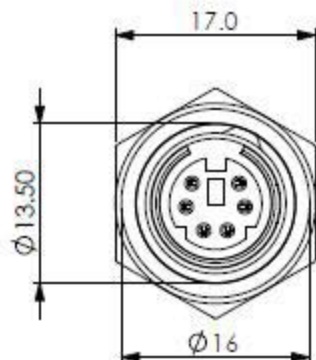




P.C.B. LAYOUT
(BOTTOM VIEW)



SECTION A-A



specification :

- current carrying capacity
 - AC : 100V 1A MAX.
 - DC : 12V 2A MAX.
- contact resistance : 30m OHM MAX.
- insulation resistance : 50M OHM MIN. @ DC 250V
- voltage withstand : AC 250V for 1 minute
- insertion force : 1.0 ~ 4.5 Kg
withdrawal force : 0.8 ~ 3.0 Kg

4	Terminals	Brass	Silver Ptd.	6
3	8P HOUSING	PBT		1
2	Screw Nut	Steel		1
1	Shield Cover	Brass	Tin Ptd.	1
No.	Description	Material	Treat	Q'ty

CIC COMPONENTS IND CO LTD	品名: ITEM :	6P MINI DIN SOCKET SCREW TYPE			一般公差	SHEET:	單位: unit:	mm	日期: date:	07/01/23	繪圖: drwn by:	DanielShyr
	料號: PART NO	2076762	圖號: DRW NO.		.X +/-0.25 .XX +/-0.10		比例: scale:	2:1	版本: version:	V. 1.0	核准: aprvld by:	SkyShyr