


DC 3610KL SERIES FAN


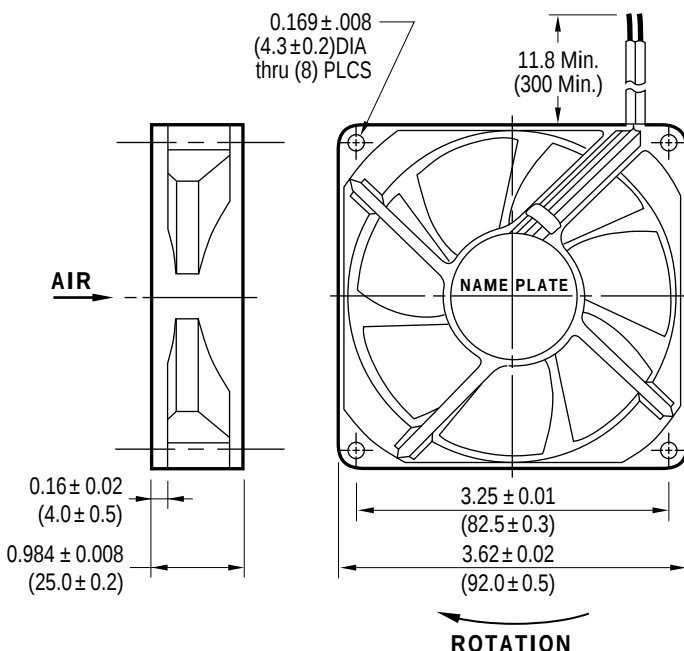


FEATURES:

Size 3.62 in sq. X 0.98 in (92mm sq. X 25mm)
 Airflow 27 - 62 CFM
 Weight 3.5 oz (100g)
 Noise 25 - 41 dBA
 Lead Wire AWG 24, Red/Black, UL1007, CSA TR-64
 Terminal 0.110 in
 (Optional) Rib type only (LOO)

Impeller and
 Venturi UL94V-0 Reinforced plastic

† Non-stock item, may be subject to lead time
 †† Rib-type is a non-stock item, may be subject to lead time

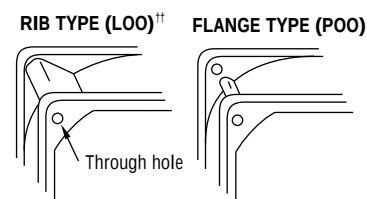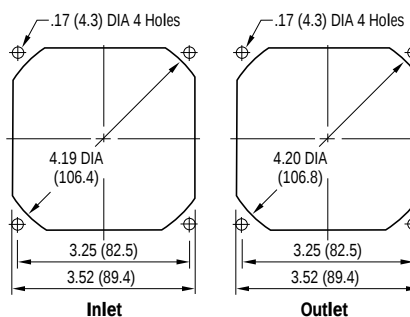

Dimensions are in inches. () are in millimeters

MODEL	VOLTAGE (V)	RANGE (V)	POWER (W)	CURRENT (mA)	SPEED (RPM)	NOISE (dBA)	NOISE NPEL (BELS)				PRESSURE (in H ₂ O)	AIRFLOW CFM	MODEL	VOLTAGE (V)	RANGE (V)	POWER (W)	CURRENT (mA)	SPEED (RPM)	NOISE (dBA)	NOISE NPEL (BELS)				PRESSURE (in H ₂ O)	AIRFLOW CFM
							100%	80%	60%	20%										100%	80%	60%	20%		
3610KL-04W-B10-P00	12	6-13.8	0.88	73	1750	25	4.26	4.12	4.22	3.93	0.06	27	3610KL-05W-B10-P00	24	10-27.6	1.13	47	1750	25	4.26	4.12	4.22	3.93	0.06	27
B20-P00†	12	6-13.8	1.32	110	2100	29	4.26	4.20	4.34	4.48	0.08	34	B20-P00†	24	10-27.6	1.37	57	2100	29	4.26	4.20	4.34	4.48	0.08	34
B30-P00	12	6-13.8	1.92	160	2450	34	4.72	4.78	4.80	4.80	0.11	41	B30-P00	24	10-27.6	2.09	87	2450	34	4.72	4.78	4.80	4.80	0.11	41
B40-P00†	12	6-13.8	2.64	220	2850	37	4.98	4.92	5.08	5.05	0.15	48	B40-P00†	24	10-27.6	2.88	120	2850	37	4.98	4.92	5.08	5.05	0.15	48
B50-P00	12	6-13.8	3.78	315	3200	41	5.40	5.73	5.41	5.25	0.19	55	B50-P00	24	10-25	3.84	160	3200	41	5.40	5.73	5.41	5.25	0.19	55

