

CUSTOMER JAMES

SPECIFICATION FOR APPROVAL

AC/DC ADAPTOR

CUSTOMER SPEC:INPUT: 100-240V AC 50/60Hz OUTPUT: 9VDC500mA

CUSTOMER DWG./PART NO. _____

MODEL NO. KSA-6W-090050VUD

SAMPLE NO: KS231047

DATE: 2023-09-08

PRODUCT NO: _____

Unit Color: Black



White



APPROVED SIGNATURES/客户确认

核准/APPROVED BY	审核/CHECKED BY:	检测/TESTED BY:

Manufacturer/制造商

业务/SALES	品管/QE	核准/APPROVED BY	制样/DESIGNED BY
EDDY	周松平	林伟金	阳灿

Von Development Ltd. 旺怡發展有限公司

1A, Fook Ying Bldg, 379 Kings Road, North Point, Hong Kong

TEL: 852-2187-2875

FAX: 852-3012-1881

info@vonhk.com

				Switching power supply specification(class B)		
				KUANTECH P/N:	PRODUCT NO.:	CUSTOMER P/N:
				KSA-6W-090050VUD	KS231047	

Project Modify List

Item	Content	Rev.	Date	Prepared By	Checked By
1	First REV.	A	2023-09-08	Liao xiaoyan	Lin xuexian
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					

TITLE:		REVISION: A		DRAWING NO.:	
PREPARED: 廖小艳	CHECKED: 林学贤 林英青	APPROVED: 贺洪明		DATE: 2023-09-08	PAGE: 2 OF 11

		Switching power supply specification(class B)		
		KUANTECH P/N:	PRODUCT NO.:	CUSTOMER P/N:
		KSA-6W-090050VUD	KS231047	
1	GENERAL	4		
1.1	Description.....	4		
2	INPUT REQUIREMENTS	4		
2.1	Input Conditions.....	4		
2.2	AC Inrush Current.....	4		
3	OUTPUT REQUIREMENTS	4		
4	MECHANICAL	5		
4.1	Enclosure And Layout.....	5		
4.2	Input and Output Configuration	5		
5	EGULATORY COMPLIANCE	6		
5.1	EMC Specifications	6		
5.1.1	Radiated and Conducted Emission.....	6		
5.2	Immunity	6		
5.2.1	Electrostatic Discharge Immunity.....	6		
5.2.2	Radiated Field Immunity.....	6		
5.2.3	Fast Transient Immunity	6		
5.2.4	Surge Immunity.....	6		
5.3	Safety Requirements and Certification	7		
5.3.1	Regulatory Standard.....	7		
5.3.2	Additional Safety Requirements	7		
6	ENVIRONMENTAL REQUIREMENTS	7		
6.1	Temperature	7		
6.2	Humidity	7		
7	APPEARANCE DRAWING: (Unit: mm)	8		
8	NAME PLATE:	9		
9	DIMENSION OF OUTPUT PLUG & DC CORD (Unit: mm).....	10		
10	PACKING (Unit: mm)	11		
TITLE:		REVISION: A	DRAWING NO.:	
PREPARED: 廖小艳	CHECKED: 林学贤 林英青	APPROVED: 贺洪明	DATE: 2023-09-08	PAGE: 3 OF 11

	Switching power supply specification(class B)		
	KUANTECH P/N:	PRODUCT NO.:	CUSTOMER P/N:
	KSA-6W-090050VUD	KS231047	

1 GENERAL

1.1 Description

This specification defines the performance characteristics for a class II adapter., single-phase 4.5 watts. Single output level power supply.

- Simple design philosophy.
- Reliability level of 50K hours MTBF @ 25°C(rated input voltage, and using the Telcordia SR-332 issue method).
- DC output voltage must be Safe Extra Low Voltage (SELV) & Limited Power as defined by IEC62368-1.
- The maximum room ambient temperature (T_{mra}), as mentioned in clause B.1.6 and B.2.6 of IEC62368-1,for the external power supply is 50°C.
- Cooling: natural convection.

2 INPUT REQUIREMENTS

2.1 Input Conditions

The supply shall operate over the voltage ranges as follows:

Rated input voltage	100-240Vac
Operating range	90-264Vac
Rated input frequency	50/60Hz +/- 3Hz
Rated input current	0.18A Max.
Power consumption (no-loading)	0.1W Max.
Primary current protection	An adequate internal fuse on the AC input line is provide.
Configuration	<u>2</u> Conductor

2.2 AC Inrush Current

No damage shall be occurred and the input fuse shall not be blown up nominal input voltage full load 25°C cold start.

3 OUTPUT REQUIREMENTS

3.1	Nominal dc output voltage	+9.0V
3.2	Minimum load current	0.01A
3.3	Rating load current	0.5A
3.4	Rating output power	4.5W
3.5	Line regulation	The line regulation is less than <u>±5%</u> while measuring at rated load and +/-10% of input voltage changing.
3.6	Load regulation	The load regulation for <u>+9.0V</u> is less than <u>±5%</u> , at measured output load from 0% to 100% rated load .

TITLE:		REVISION: A	DRAWING NO.:	
PREPARED: 廖小艳	CHECKED: 林学贤 林英青	APPROVED: 贺洪明	DATE: 2023-09-08	PAGE: 4 OF 11

		Switching power supply specification(class B)		
		KUANTECH P/N:	PRODUCT NO.:	CUSTOMER P/N:
		KSA-6W-090050VUD	KS231047	

3.7	Ripple and noise	200mV nominal input AC voltage at 25°C Ambient Temperature.
		Add 0.1uF/50V ceramic capacitor and 10uF/50V aluminum electrolytic capacitor across the output terminal. Measured with 20MHz Bandwidth Oscilloscope.
3.8	Average efficiency	<u>77.05%</u> minimum
		115V/60Hz and 230V/50Hz, output current from 100%, 75%, 50%, 25%.
3.9	Turn on delay time	<u>4000mS Max</u> at nominal input AC voltage and full load
3.10	Rise time	The Supply shall have a start-up rise time of less than <u>50mS</u> to rise to within regulation limits for all DC outputs.
3.11	Hold up time	8 mS minimum at nominal input 100Vac minimum voltage and full load.
3.12	Output over-shoot	Less than <u>10%</u> of nominal voltage value
3.13	LED indication function	/
3.14	Protection function	
	Short-circuit protection	The adapter shall not be damaged by short the DC output to Ground. The adapter shall resume normal operation when a short circuited fault condition is removed
	Over current protection	The output shall be protected against the over current conditions. A power cycle shall be required to restore normal operation.

4 MECHANICAL

4.1 Enclosure And Layout

Plastic case: UL94V-0
Weight : /g (Max.)
Dimensions: 55.1*24.1*35.49mm
Colour : BLACK

4.2 Input and Output Configuration

Input pin: US PIN
Output connector : DC plug type: 5.5*2.1*10mm (Fork and Groove)
Polarity: Center“+”
Cable: 1.83M VW-1 80°C 300V 2468 24AWG 2C BLACK+WHITE
(PAHS REACH ROHS)

TITLE:		REVISION: A	DRAWING NO.:	
PREPARED: 廖小艳	CHECKED: 林学贤 林英青	APPROVED: 贺洪明	DATE: 2023-09-08	PAGE: 5 OF 11

	Switching power supply specification(class B)		
	KUANTECH P/N:	PRODUCT NO.:	CUSTOMER P/N:
	KSA-6W-090050VUD	KS231047	

5 REGULATORY COMPLIANCE

5.1 EMC Specifications

The external power supply must meet all specification in this section. It is recommended that the external power supply be tested with the customer's equipment in order to get the best EMC solution.

5.1.1 Radiated and Conducted Emission

FCC part 15: Class B for radiated and conducted emissions.

EN55032, Class B for radiated and conducted emissions.

5.2 Immunity

5.2.1 Electrostatic Discharge Immunity

EN 55035, EN 61000-4-2

- Air Discharge: $\pm 8\text{kV}$

- Contact Discharge: $\pm 4\text{kV}$

- Performance Criteria B

Electrostatic-discharge test by contact or air should be conducted with Static-discharge tester, energy storage capacitance of 150pF, and discharge resistance of 330 Ω , 8kV air discharge, 4kV contact discharge.

5.2.2 Radiated Field Immunity

EN 55035, EN 61000-4-3

- Frequency Range: 80-1000MHz, still need test singly 1800MHz, 2600MHz, 3500MHz, 5000MHz

- Field Strength: 3 V/m with 80% amplitude modulation of 1kHz

- Performance Criteria A

Radio-frequency electromagnetic field susceptibility test, RS 80-1000MHz, 3V/m, 80%AM(1kHz).

5.2.3 Fast Transient Immunity

EN 55035, EN 61000-4-4

- Power line: 1kV

- Signal line: 0.5kV

- Performance Criteria B

5.2.4 Surge Immunity

EN 55035, EN 61000-4-5

- Line to line: $\pm 1.0\text{kV}$

- Line to Earth: $\pm 2.0\text{kV}$

- + 90° / -270°

Lightning Surge Voltage shall be applied in differential and common mode to AC input lines and cross primary AC input and secondary GND.

TITLE:		REVISION: A	DRAWING NO.:	
PREPARED: 廖小艳	CHECKED: 林学贤 林英青	APPROVED: 贺洪明	DATE: 2023-09-08	PAGE: 6 OF 11

	Switching power supply specification(class B)		
	KUANTECH P/N:	PRODUCT NO.:	CUSTOMER P/N:
	KSA-6W-090050VUD	KS231047	

5.3 Safety Requirements and Certification

5.3.1 Regulatory Standard

The power supply shall comply with the following international regulatory standards:

for short	Country	Certified Status	Standard
UL	USA	Meet	UL 62368-1
CUL	Canada	Meet	CSA C22.2 NO.62368-1

5.3.2 Additional Safety Requirements

- ◎ Dielectric Withstand Voltage, Primary(input AC short)-to-Secondary(output DC short): 3000Vac, 10m A, 1 minute.
- ◎ Insulation Resistance, Input to output: 40MΩ(MIN.) at 500VDC.
- ◎ Reinforced insulation system, Primary-to-Ground and Primary-to-Secondary.
- ◎ The leakage current shall not exceed 0.25mA.

6 ENVIRONMENTAL REQUIREMENTS

6.1 Temperature

- ◎ Operating: 0 °C +50 °C
- ◎ Non-Operating: -20 °C +80 °C


6.2 Humidity

- ◎ Operating: 10%~90% (Non Condensing)
- ◎ Non-Operating: 10%~90% (Non Condensing)

TITLE:		REVISION: A	DRAWING NO.:	
PREPARED: 廖小艳	CHECKED: 林学贤 林英青	APPROVED: 贺洪明	DATE: 2023-09-08	PAGE: 7 OF 11

Switching power supply specification(class B)			
KUANTECH P/N:		PRODUCT NO.:	CUSTOMER P/N:
KSA-6W-090050VUD		KS231047	

7 APPEARANCE DRAWING: (Unit: mm)

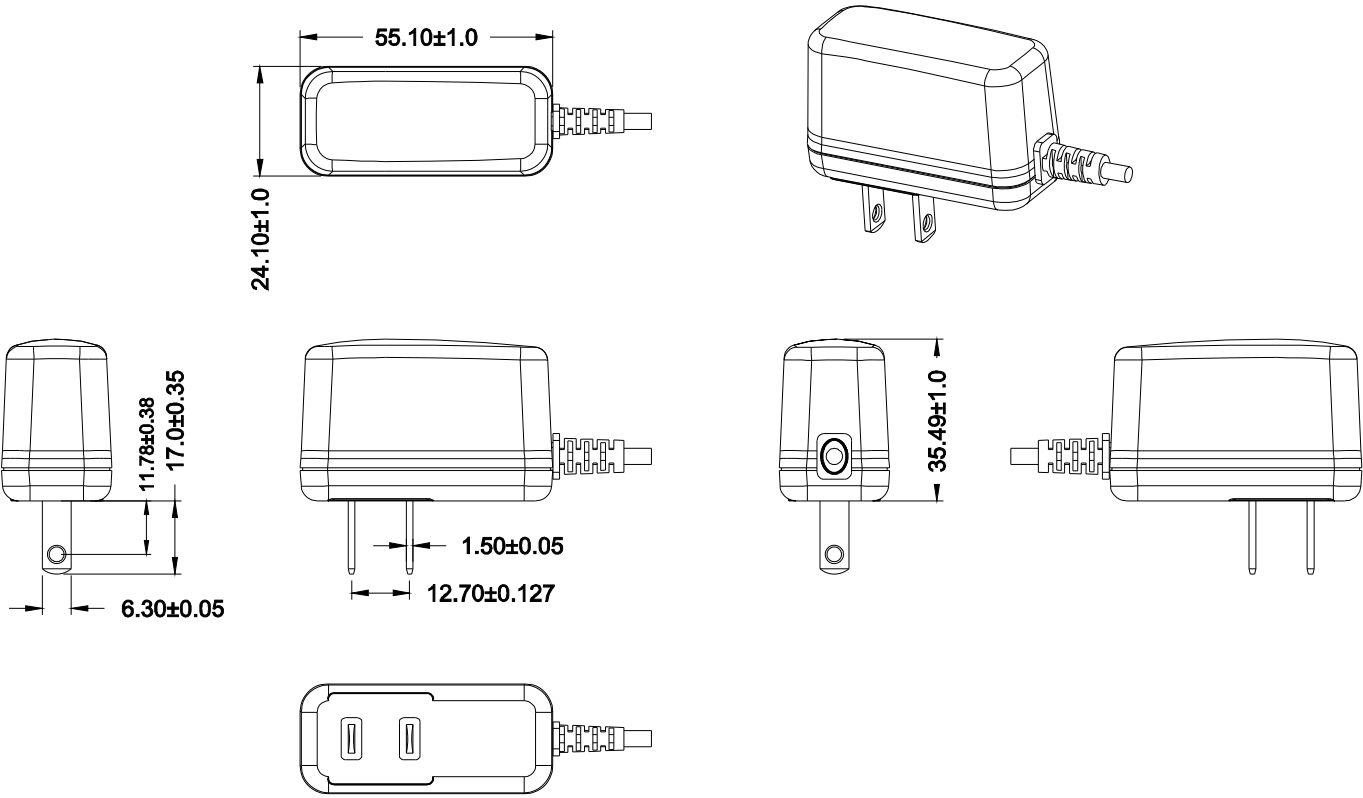


- NOTE: 1. Case cover & chassis material:
- PC BLACK
2. AC PIN MATERIAL: BRASS (NI PLATED)
3. PAHS REACH ROHS
4. Satin Finish 雾面

TITLE:		REVISION: A	DRAWING NO.:	
PREPARED: 廖小艳	CHECKED: 林学贤 林英青	APPROVED: 贺洪明	DATE: 2023-09-08	PAGE: 8 OF 11

Switching power supply specification(class B)			
KUANTECH P/N:		PRODUCT NO.:	CUSTOMER P/N:
KSA-6W-090050VUD		KS231047	

8 NAME PLATE:

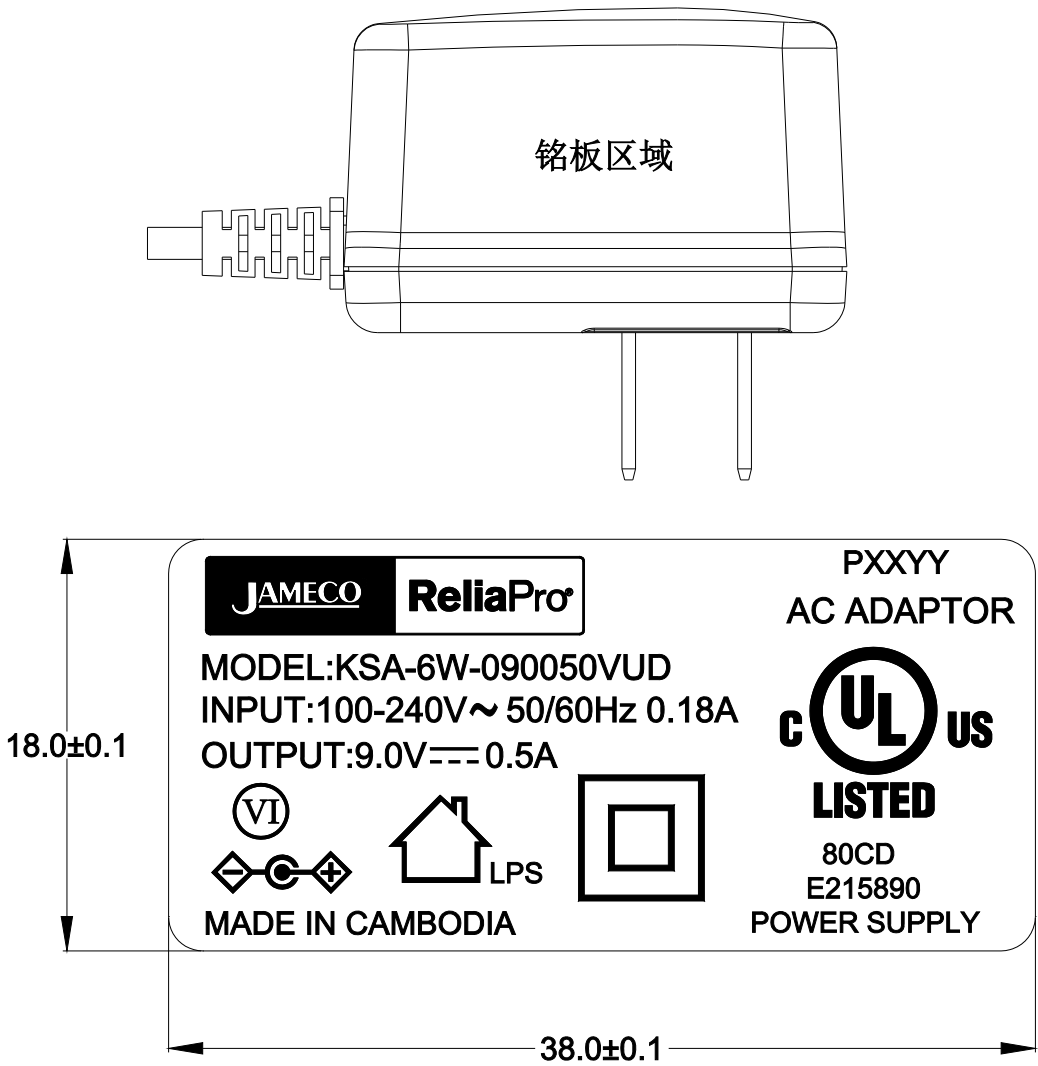


1. Laser 镭射

DATE CODE (PXYY: P=PAHS, XX=WEEK, YY=YEAR)按实际生产日期

TITLE:		REVISION: A	DRAWING NO.:	
PREPARED: 廖小艳	CHECKED: 林学贤 林英青	APPROVED: 贺洪明	DATE: 2023-09-08	PAGE: 9 OF 11

Switching power supply specification(class B)			
KUANTECH P/N:		PRODUCT NO.:	CUSTOMER P/N:
KSA-6W-090050VUD		KS231047	

9
 DIMENSION OF OUTPUT PLUG & DC CORD (Unit: mm)


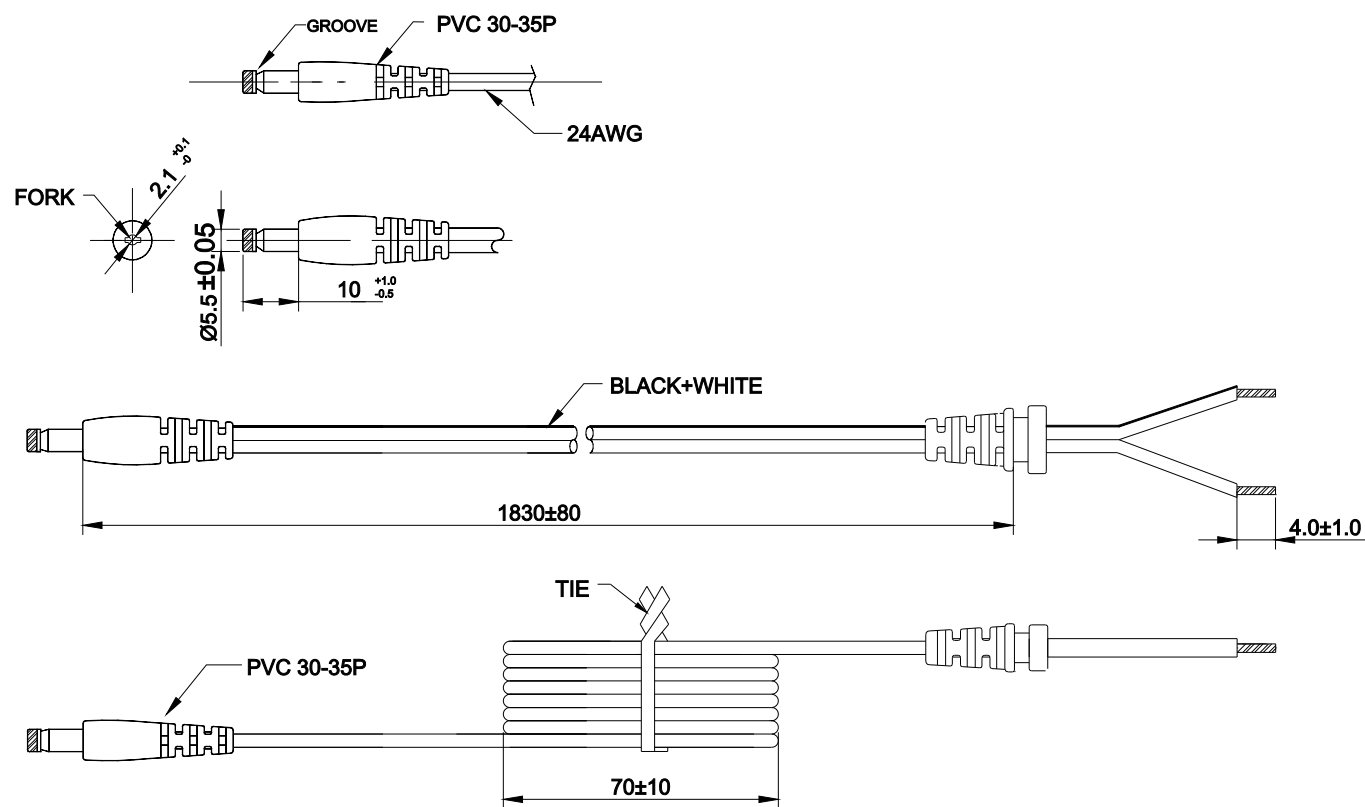


- NOTE: (unit:mm)
- 1).WIRE TYPE:\VW-1 80°C 300V L=1830mm 2468 24AWG 2C BLACK+WHITE
BLACK and WHITE----Positive BLACK----Negative
 - 2).THE POLARITY:
 - 3).PAHS REACH ROHS

TITLE:		REVISION: A	DRAWING NO.:	
PREPARED: 廖小艳	CHECKED: 林学贤 林英青	APPROVED: 贺洪明	DATE: 2023-09-08	PAGE: 10 OF 11

	Switching power supply specification(class B)		
	KUANTECH P/N:	PRODUCT NO.:	CUSTOMER P/N:
	KSA-6W-090050VUD	KS231047	

10 PACKING (Unit: mm)

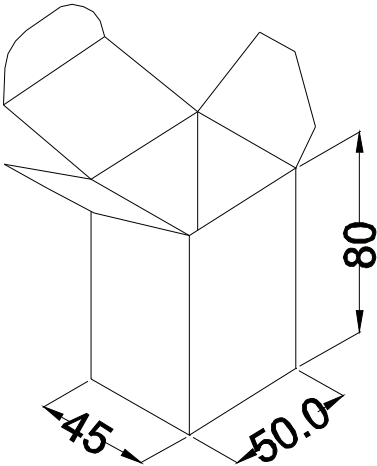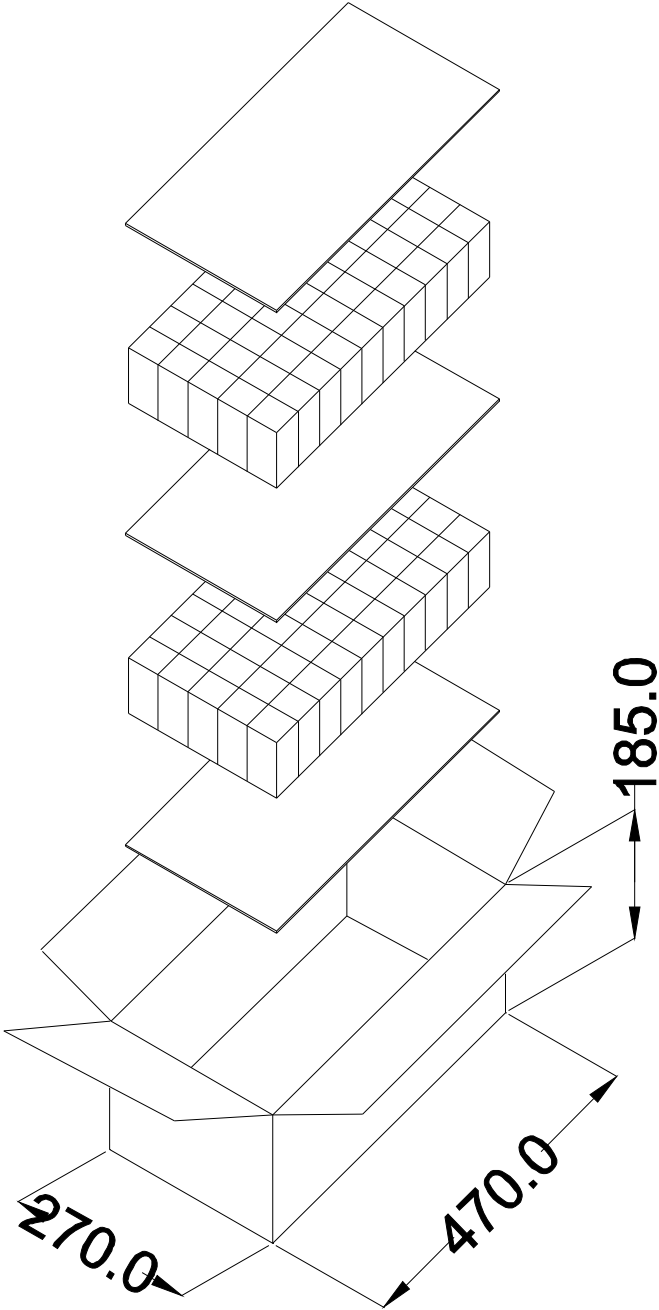

TITLE:		REVISION: A	DRAWING NO.:	
PREPARED: 廖小艳	CHECKED: 林学贤 林英青	APPROVED: 贺洪明	DATE: 2023-09-08	PAGE: 11 OF 11