


R13-104 · 105

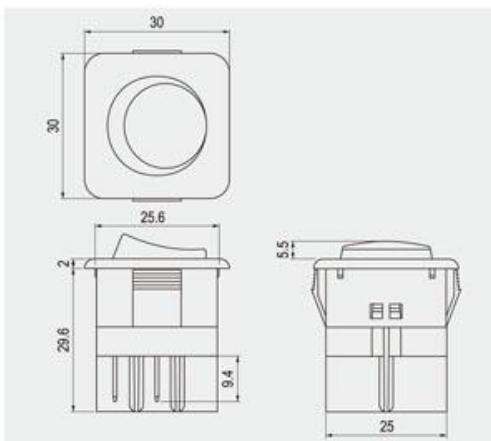

Rating

16.1A 125V/250V AC
10(6)A 250V AC

Contact resistance

50mΩ Max

Insulation resistance

DC 500V 100MΩ Min

Dielectric strength

AC 1500V 1 minute

Cut-out

X

Y

XX-YY	X	Y
0.75-1.25	26.7-0.1	25.8±0.1
1.25-2	26.9-0.1	25.8±0.1
2-3	27.3-0.1	25.8±0.1

FEATURES

- * MATERIAL: Frame is nylon (UL flame: 94V-2). Terminals are silver plated brass.
- * Illuminated actuators are molded in PC, available with red, amber, green, blue and white colors.
- * Snap-in mounting, easy to install switch into panel.

R13-

ROCKER	FUNCTION	TERMINAL
1 0 4	A OFF ON 4P DPST	H OFF ON 6P DPDT
1 0 5	B OFF ON 4P DPST (ILLUMINATED) 125VAC 33KΩ / 250VAC 150KΩ	I OFF ON 6P DPDT
	C ON ON 6P DPDT	B F OFF (ON) 4P DPST (ILLUMINATED) 125VAC 33KΩ / 250VAC 150KΩ
D	D ON OFF ON 6P DPDT	F L OFF (ON) 2P SPST (ILLUMINATED) 125VAC 33KΩ / 250VAC 150KΩ