



R13-234

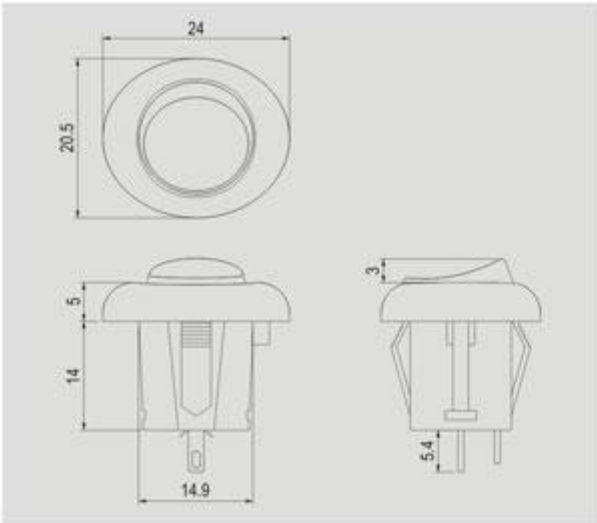


Rating
6A 125V AC
3A 250V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1500V 1 minute
Cut-out (R13-234)



R13-241

Screw Type

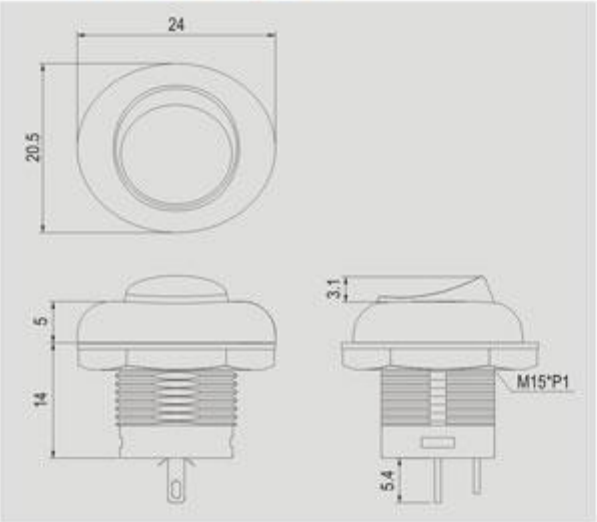

Cut-out (R13-241)



0.75~3 mm
6 mm max

FEATURES

- * MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.
- * Nylon with fiber glass base.
- * R13-234 Snap-in mounting, easy to install switch into panel.
- * R13-241 Screw type.

R13-234 - R13-241

FUNCTION		TERMINAL
A ON OFF 2P SPST	D ON OFF ON 3P SPDT	0 5 SO
C ON ON 3P SPDT	I (ON) OFF (ON) 3P SPDT	