


# R13-66

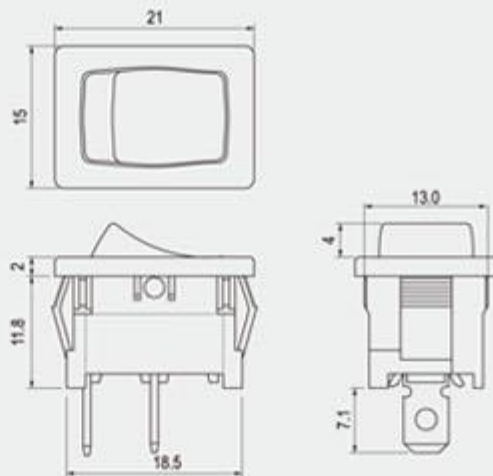

## Rating

16A 125V AC 1/3HP 125V AC  
10A 250V AC 1/2HP 250V AC

## Contact resistance

50mΩ Max

## Insulation resistance

DC 500V 100MΩ Min

## Dielectric strength

AC 1500V 1 minute

## Cut-out

X

Y

|           | X        | Y        |
|-----------|----------|----------|
| 0.75~1.25 | 19.2±0.1 | 13.0±0.1 |
| 1.25~2    | 19.4±0.1 | 13.0±0.1 |
| 2~3       | 19.8±0.1 | 13.0±0.1 |

## Cut-out for X8 ROCKER



|           | X        | Y        |
|-----------|----------|----------|
| 0.75~1.25 | 19.4±0.1 | 13.0±0.1 |
| 1.5~2.5   | 19.8±0.1 | 13.0±0.1 |

## FEATURES

- \* MATERIAL: Frame is nylon (UL flame: 94V-2). Terminals are silver plated brass.
- \* Illuminated actuators are molded in PC, available with red, amber, green, blue and white colors.
- \* Snap-in mounting, easy to install switch into panel.
- \* Waterproof cover is optional.
- \* The only difference between R13-66B and R13-66B6 is the rocker style.

IP55



For waterproof cover,  
Please refer to page 1-3  
(R13-66B-25)



Ordering number instruction