


R13-73

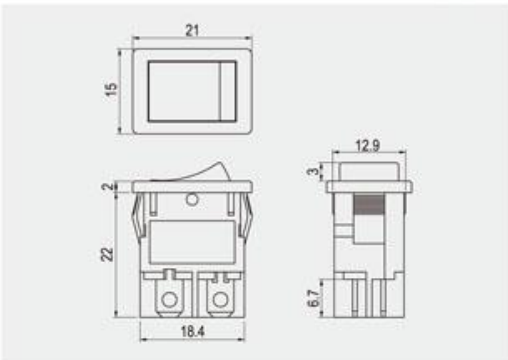

Rating
10A 125V AC
6A 250V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1500V 1 minute
Cut-out

	X	Y
	X	Y
0.75~1.25	19.2±0.1	13.0±0.1
1.25~2	19.4±0.1	13.0±0.1
2~3	19.8±0.1	13.0±0.1

FEATURES

- * MATERIAL: Frame is nylon (UL flame: 94V-2). Terminals are silver plated brass.
- * Illuminated actuators are molded in PC, available with red, amber, green, blue and white colors.
- * Snap-in mounting, easy to install switch into panel.
- * Lower rating than R13-73 A series.

Ordering number instruction

R13-73 -

FUNCTION				TERMINAL	
Different button (按鈕不同)				0 2	.187" SQ
Illuminated button (帶燈)				0 9	PC
				1 0	PC ANGLE
A	A 2	B	C		
OFF 4P DPST	OFF 4P DPST	OFF 3P SPST (NEON)	OFF 4P DPST (NEON)		
		125VAC 33KΩ / 250VAC 150KΩ	125VAC 33KΩ / 250VAC 150KΩ		

Related Products



R13-66



R13-243

* The specification subject to change without notice." "The drawing is for reference only.