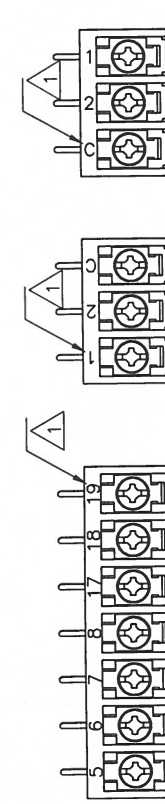

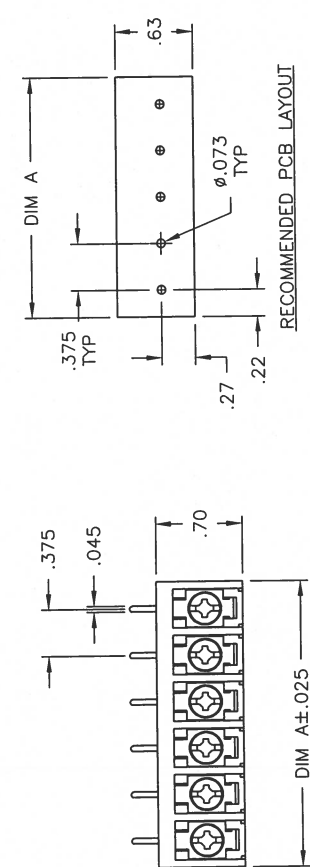


THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		- - -		LOC		DIST		REVIEWS					
© COPYRIGHT - By -		ALL RIGHTS RESERVED.				FT		O		P	LTR	DESCRIPTION	DATE	OWN	AP'D
											B4	REVISED PER ECO-11-004820	11MAR11	RK	HMR

~~0-1437651-4~~~~7-1437651-1~~~~7-1437651-2~~

MATERIAL:
HOUSING: THERMOPLASTIC, UL94V-0 BLACK.
TERMINALS: COPPER ALLOY, BRIGHT TIN PLATED.
SCREWS: 6-32 STEEL, ZINC PLATED WITH CLR CHROMATE.

ELECTRICAL:
MAXIMUM CURRENT: 25A.
OPERATING VOLTAGE: 300V.
WIRE RANGE: 12-22 AWG.
RECOMMENDED TIGHTENING TORQUE: 7 IN.-LBS.

RECOMMENDED TIGHTENING TORQUE: 7 IN.-LBS.

ENVIRONMENT:
OPERATING TEMP.: +105°C

1 MARKED WITH WHITE PERMANENT INK.

Δ ABSOLUTE DABTS: ABSOLUTE CIS STREAMLINING PER D REAUD/D.SINISI

REV	1	OF	1
SHEET	1	OF	1
SCALE	CUSTOMER DRAWING		
CUSTOMER DRAWING			

[illegible][illegible]1470-19 (3/11)