


● PRODUCT FEATURES :

- 1. LOWEST COST , PROMPT DELIVERY
- 2. EXCELLENT LONG TERM STABILITY
- 3. WIDE RESISTANCE RANGE 0Ω 1~22MΩ
- 4. POWER RATINGS 1/8W~3Ws

● POWER RATINGS DIMENSIONS


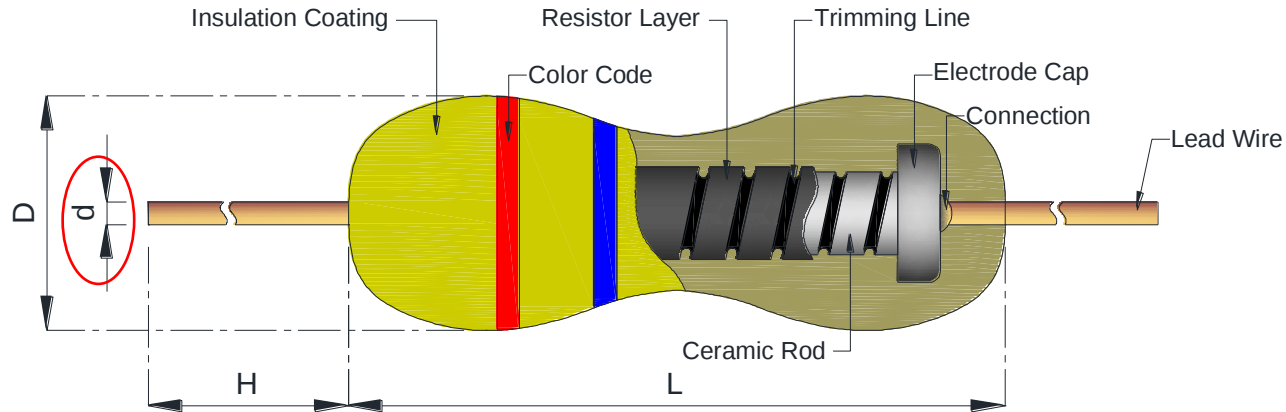


STYLE		DIMENSIONS(mm)				Comment
Normal	Miniature	L	D	H	d	
RC-1/8W	RC1/4Ws	3.3 ^{+0.4} _{-0.2}	1.8±0.3	29±2.0	0.4±0.03	
RC-1/8W	RC1/4Ws	3.3 ^{+0.7} _{-0.2}	1.8±0.3	29±2.0	0.4±0.03	
RC-1/8W	RC1/2Wss	3.3 ^{+0.7} _{-0.2}	1.8±0.3	29±2.0	0.4±0.03	
RC-1/4W	RC1/2Ws	6.3±0.5	2.3±0.3	28±2.0	0.5±0.03	
RC-1/3W	RC1/2Wss	8.5±0.5	2.7±0.5	27±2.0	0.52±0.03	
RC-1/2W	RC1Ws	9.0±0.5	3.2±0.5	26±2.0	0.52±0.03	
RC-1W	RC2Ws	11.5±1.0	4.5±0.5	35±2.0	0.78±0.03	
RC-2W	RC3Ws	15.5±1.0	5.0±0.5	32±2.0	0.78±0.03	

● ELECTRICAL CHARACTERISTICS

Power rating at 70℃	1/8W	1/4Ws	1/2WSS	1/4W	1/2Ws	1/3W	1/2WSS	1/2Ws	1/2W	1Ws	1W	2Ws	2W	3Ws
Body Size	3.3*1.8	3.3*1.8	3.3*1.8	6.3*2.3	6.3*2.3	8.5*2.7	8.5*2.7	6.3*2.3	9*3.2	9*3.2	11.5*4.5	11.5*4.5	15.5*5	15.5*5
Operating Temp. Range	-55℃ to +155℃													
Max. Working Voltage	150V	200V	280V	250V	300V	280V	300V	320V	350V	400V	450V	500V	500V	500V
Max. Overload Voltage	300V	400V	500V	500V	500V	500V	500V	600V	700V	800V	1000V	1000V	1000V	1000V
Dielectric Withstanding voltage	300V	400V	400V	500V	500V	500V	500V	600V	700V	800V	1000V	1000V	1000V	1000V
Value Range 、±5%	0.1Ω~0.68Ω-E6 Series; 1Ω~22MΩ-E24 series													

Value Range for standard resistance , below or over this resistance on request.

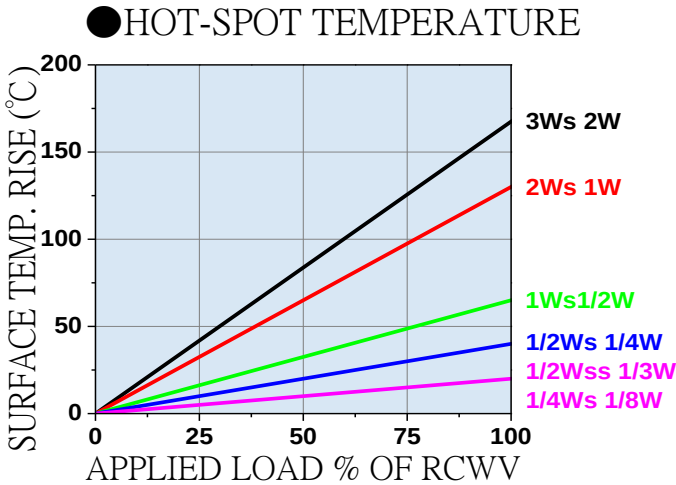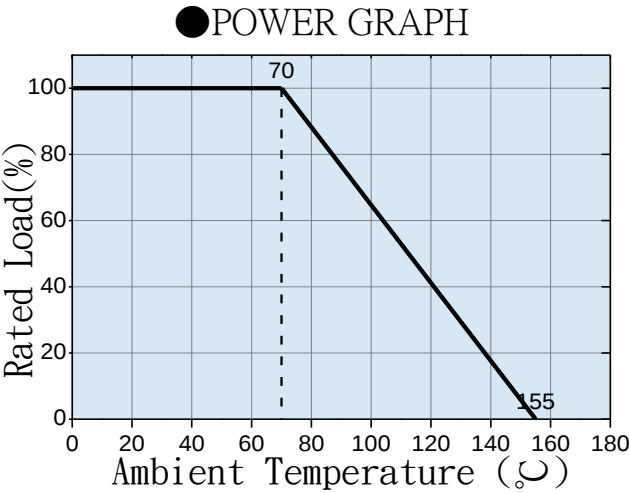

● TEMPERATURE COEFFICIENT (T.C.R.)

STYLE		Max. Value of Temp. Coefficient ppm/°C			
		under 1Ω	1Ω to 100KΩ	100KΩ to 1MΩ	1MΩ to 4M7Ω
RC	1W.2W.2WS. 3WS	±1500 ppm	±350 ppm	-0ppm -500ppm	-0ppm -1000ppm
	1/8W.1/4W.1/4WS	±1500 ppm	+350ppm- 500ppm	-0ppm-700ppm	-0ppm-1500ppm
	1/2W.1/2WS.1WS				

● ENVIRONMENTAL CHARACTERISTICS.

PERFORMANCE TEST	TEST METHOD	APPRAISE
SHORT TIME OVERLOAD	JIS-C-5202 5.5 2.5 times RCWV for 5 seconds	±(0.75%+0.05 Ω)
TEMPERATURE COEFFICIENT(T.C.R.)	Resistance value at room Temperature and room Temperature+100°C	page
DIELECTRIC WITHSTANDING VOLTAGE	JIS-C5202 5.7 In V-Block for 60 seconds	By Type
PULSE OVERLOAD	JIS-C5202 5.8 4 times RCWV for10000cycles(1sec.on , 25secs.off)	±(1%+0.05 Ω)
INSULATION RESISTANCE	JIS-C5202 5.6 In V-Block	> 10000MΩ
LOAD LIFE	JIS-C5202 7.10 70°C at RCWV for1000hrs.(1.5hrs. on , 0.5hrs.off)	±(3%+0.05 Ω)
LOAD LIFE IN HUMIDITY	JIS-C5202 7.9 40±2°C 90~95%RH at RCWV for1000hrs. (1.5hrs. on , 0.5hrs.off)	Less than 100KΩ±3% 100KΩ or more±5%
SOLDER ABILITY	JIS-C5202 6.5 260±5°C for 2±0.5 seconds	95% min. coverage
RESISTANCE TO SOLVENT	JIS-C5202 6.9 Specimens shall be immersed in a bath of alcohol completely for 3 minutes using ultrasonic test equipment	No deterioration of coatings and markings
TERMINAL STRENGTH	Direct load for 10 sec. In the direction off the terminal leads.	Tensile: ≥2.5kg

★ Rated continuous Working Voltage (RCWV) = $\sqrt{POWER.RATING. \times RESISTANCE\ VALUE}$

● Resistor body color

Standard : Epoxy Coating

- 1. Normal size(1/8W~2W)-----Khaki
- 2. Small size(1/2Ws~3Ws)-----Pink
- 3. Small size (1/4Ws)-----Khaki

Flame Proof : Silicone Coating

- 4. Normal size(1/4W~2W)-----Grey
- 5. Small size(1/2Ws~3Ws)-----Pink

● PART NUMBER:

RC	
↓	
Type	
RC	Carbon Film

04W	
↓	
Power rating	
08W	1/8W
04W	1/4W
S4	1/4Ws
02	1/2W
1S	1WS
2W	2W

3K00	
↓	
Resistance	
1E00	1Ω
10E0	10Ω
100E	100Ω
1K20	1K2Ω
1M00	1MΩ
22M0	22MΩ

J	
↓	
J	
G	± 2%
J	± 5%

T	
↓	
Packaging	
T	Taping Box
R	Taping Reel
B	Bulk
F	F-TYPE
M	M-TYPE
P	PANA