
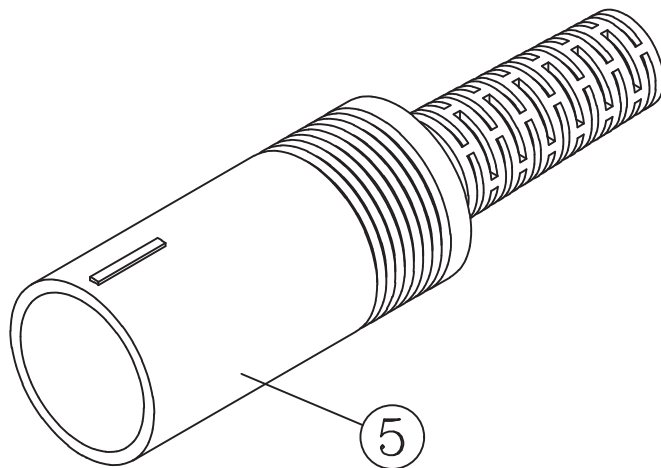
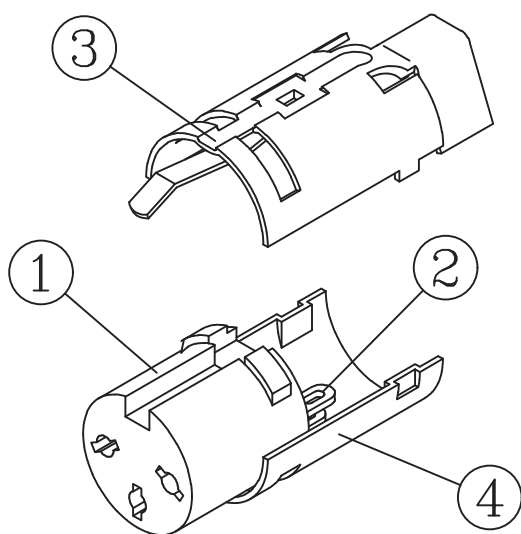


ARRANGEMENT OF CONTACTS

PARTS	3P	4P	5P			6P	7P	8P	
ANGLE	180°	216°	180°	240°	360°	240°	270°	270°	262°
POSITION OF VIEWS									

SPECIFICATIONS

Contact resistance	20mΩ Max.
Dielectric strength	1,000V AC/1 Minute
Insulation resistance	100MΩ Min. at 500V DC
Rating	100V AC 2A

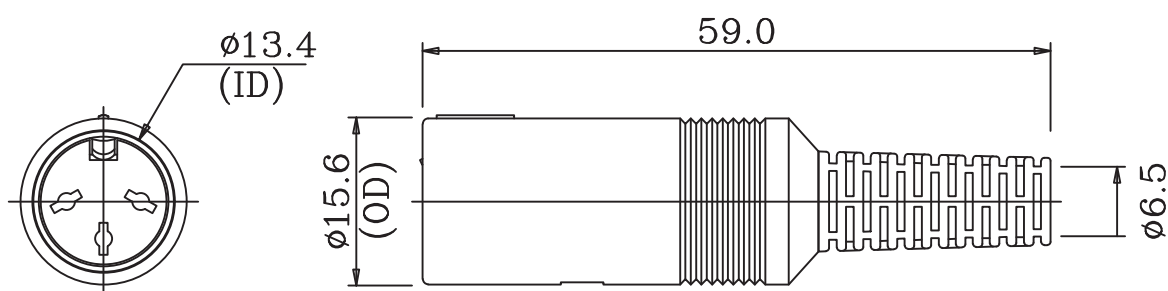

5	PLASTIC BODY	1	EVA [UE633]		UL94HB
4	COVER-B	1	BSR-H (0.5t) [C2680R]	NICKEL	30-50u"
3	COVER-A	1	BSR-H (0.5t) [C2680R]	NICKEL	30-50u"
2	CONTACT TERMINAL	3	BSR-H (0.6t) [C2680R]	TIN PLATED	30-50u"
1	PLASTIC CORE	1	NYLON [101]		UL94V-2
P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS

DATE	980828	SCALE	4 : 3	UNIT	M/M	MODEL NO.		3 P	180°
CONNECTORS									JACK
FILE NO.									
DESIGN		DRAFTSMAN		APPREVE					