
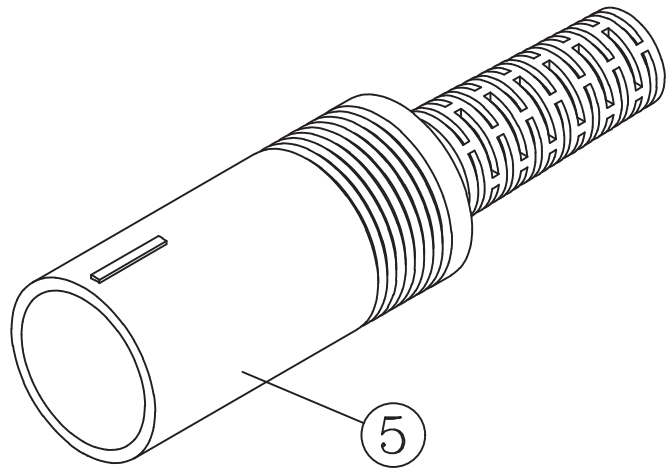
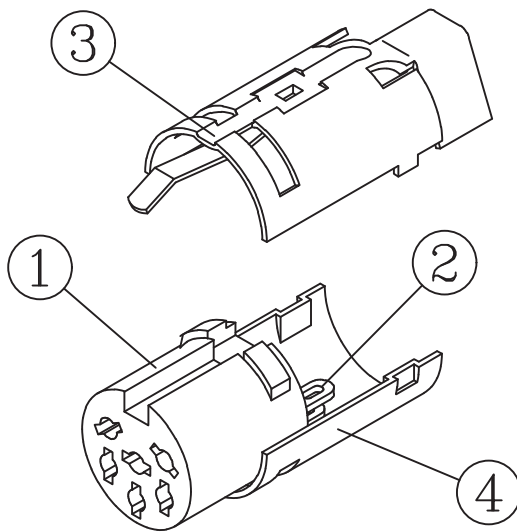


ARRANGEMENT OF CONTACTS

PARTS	3P	4P	5P			6P	7P	8P	
ANGLE	180°	216°	180°	240°	360°	240°	270°	270°	262°
POSITION OF VIEWS									

SPECIFICATIONS

Contact resistance	20mΩ Max.
Dielectric strength	1,000V AC/1 Minute
Insulation resistance	100MΩ Min. at 500V DC
Rating	100V AC 2A

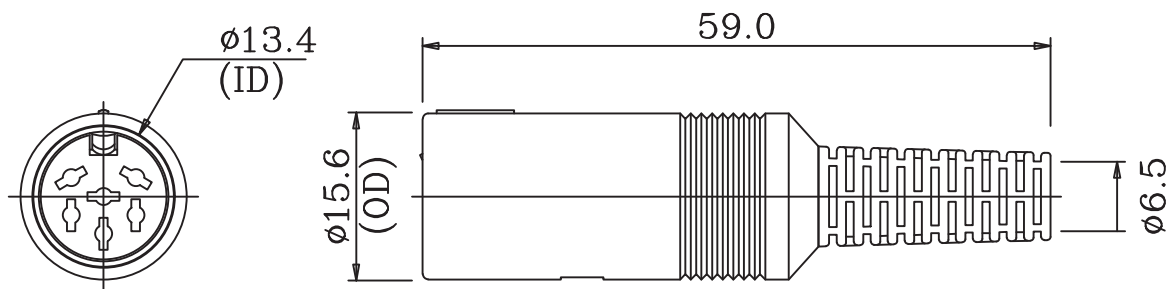

5	PLASTIC BODY	1	EVA	[UE633]		UL94HB		
4	COVER-B	1	BSR-H (0.5t)	[C2680R]	NICKEL	30-50u”		
3	COVER-A	1	BSR-H (0.5t)	[C2680R]	NICKEL	30-50u”		
2	CONTACT TERMINAL	6	BSR-H (0.6t)	[C2680R]	TIN PLATED	30-50u”		
1	PLASTIC CORE	1	NYLON	[101]		UL94V-2		
P/N	PART NAME	Q'TY	MATERIAL		PLATING	REMARKS		
DATE 980828		SCALE 4 : 3		UNIT M/M		MODEL NO.	6 P	240°
CONNECTORS								JACK
FILE NO.								
DESIGN		DRAFTSMAN		APPREVE				