


ARRANGEMENT OF CONTACTS						SPECIFICATIONS	
3P	4P	5P	6P	7P	8P	Contact resistance	30m Ω Max.
						Dielectric strength	250V AC/1 Minute
						Insulation resistance	50M Ω Min. at 250V DC
						Rating	100V AC 1A Max.; 12V DC 2A Max.

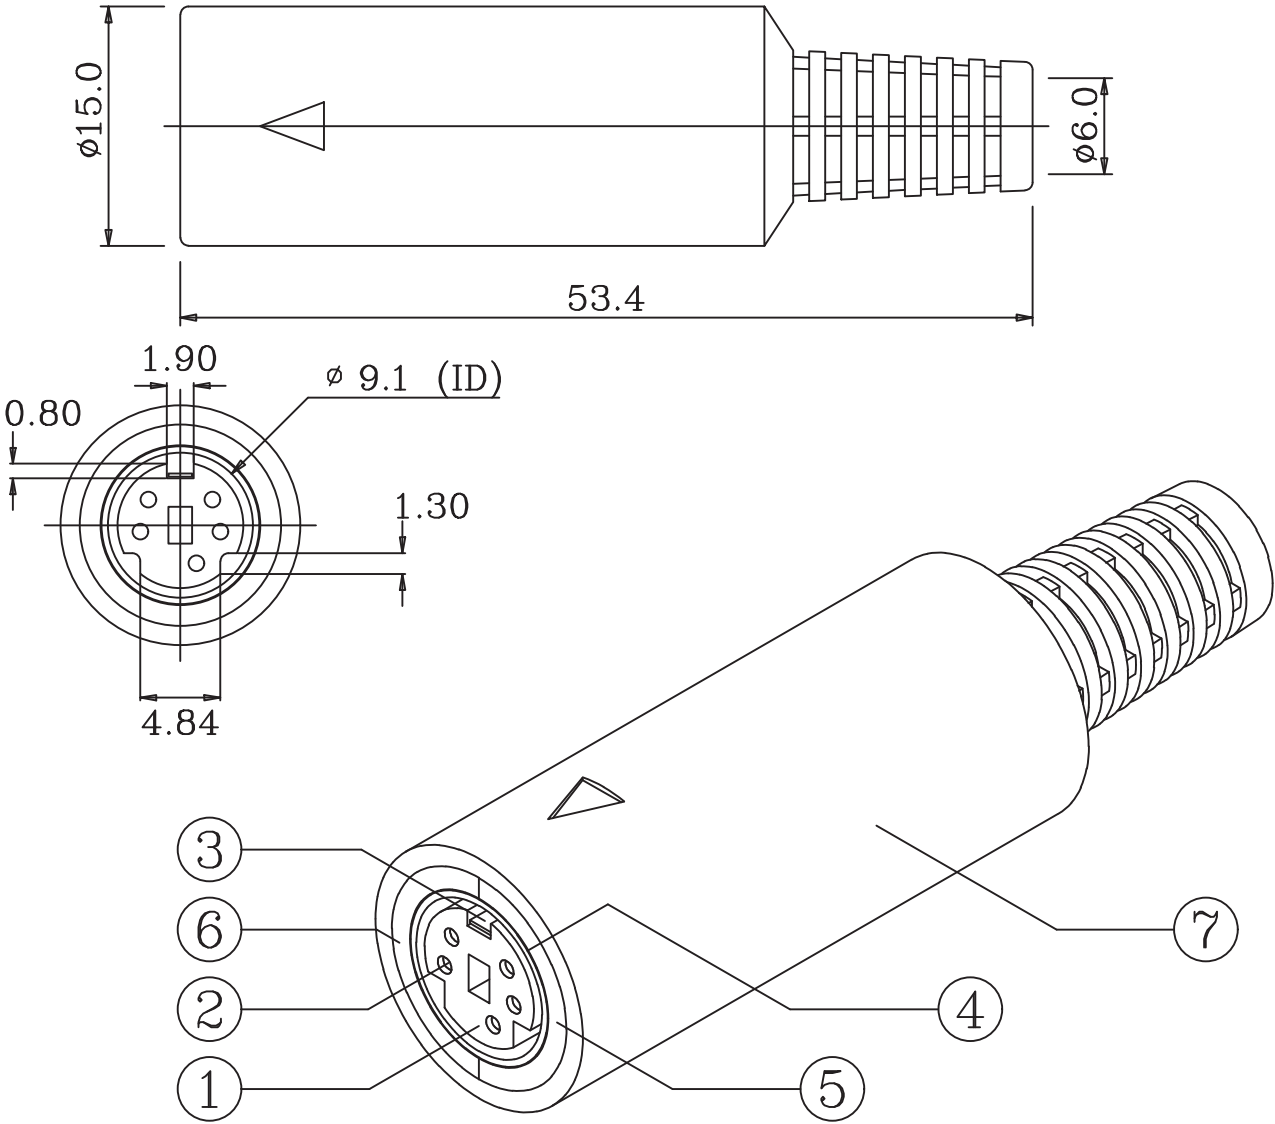

7	PLASTIC SLEEVE	1	EVA	[UE633]		UL94HB
6	PLASTIC LINING "L"	1	ABS	[777D]		UL94HB
5	PLASTIC LINING "R"	1	ABS	[777D]		UL94HB
4	BRASS SLEEVE	1	BSR-H (0.4t)	[C2680R]	NICKEL	30-50u"
3	GROUNDING PIECE	1	BSR-H (0.2t)	[C1519R-H]	NICKEL	30-50u"
2	CONTACT TERMINAL	5	BSR-H (0.2t)	[C1519R-H]	TIN PLATED	30-50u"
1	FEMALE INSERT	1	ABS	[777D]		UL94HB
P/N	PART NAME	Q'TY	MATERIAL		PLATING	REMARKS
DATE	980520	SCALE	2 : 1	UNIT	M/M	MODEL NO.
MINIATURE CONNECTORS						5 P
FILE NO.						JACK
DESIGN		DRAFTSMAN		APPREVE		