

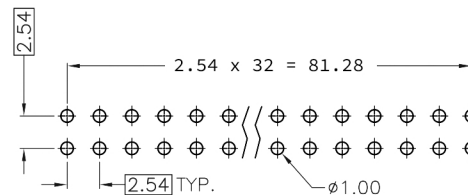
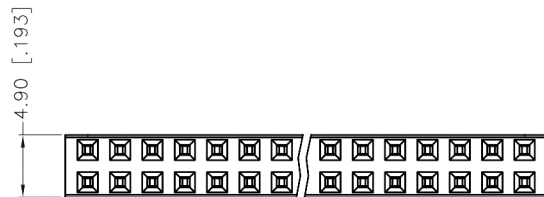


REV.	DESCRIPTION	DATE
A	RELEASE	Sep. 17, 2003

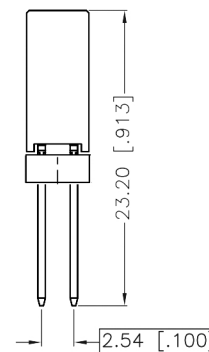

RECOMMEND P.C.B. LAYOUT
TOP VIEW

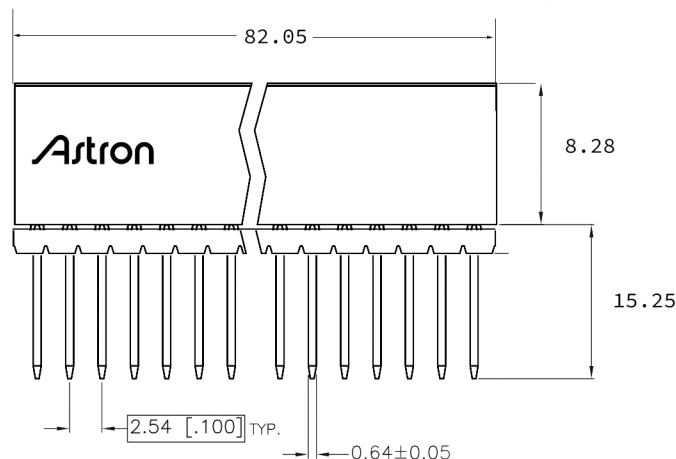


MATERIALS

1. HOUSING : P.P.S (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE. (t=0.60mm)
3. STRIP : P.P.S (UL 94V-0), BLACK.

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 1000V DC.
4. NTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.

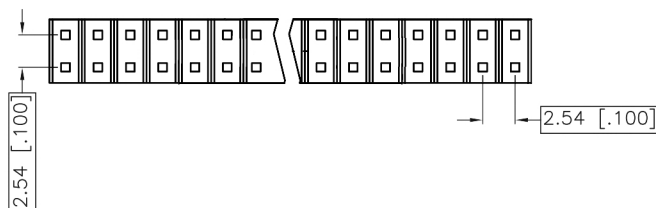

TOLERANCE		DRAWER		Astron WWW.ASTRON.COM.TW	
.0=±0.30 [.012]		CHECK			
.00=±0.20 [.008]		APP'D			
.000=±.XXX		NAME			
.0000=±.				POST HEADER RECEPTACLE	
ANG.=±3°				2.54mm PITCH, P.C.B. MOUNT	
		PRODUCT SPEC.		64 POSITION PC/104 COMPATIBLE	
				PART NUMBER	
UNITS : mm [inch]				ES1-64-12-2-GF	
SCALE	SIZE	SHEET	REV.	2290847	
NONE	A4	1 OF 1			