


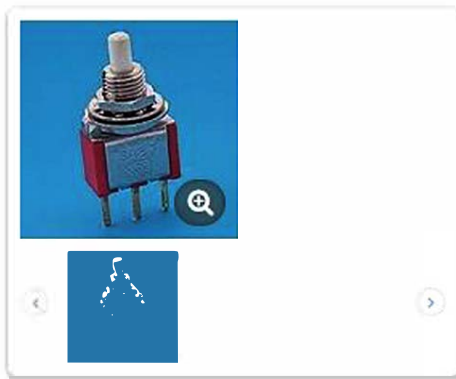

Miniature Pushbutton Switch - SP

Part Number T80-P SaleCom

Jameco SKU 2302407

Snap-acting momentary pushbutton switch with solder lug and PC thru-hole terminations. Positive tactile feel. Wide variety of cap options. This switch is perfect for Instrumentation, Telecommunications equipment, Computer peripherals.

T80-P Snap-Acting Momentary Pushbutton Switches

Features

Circuit: SPDT
Function: On-Mom

Specification

- Contact Rating: 1A @125 VAC or 28 VDC
- Electrical Life: 50,000 make and break cycles at full load
- Contact Resistance: 20 mΩ max., initial @2-4 VDC, 100 mA
- Insulation Resistance: 1,000 MΩ min.
- Dielectric Strength: 1,000 V RMS @ sea level
- Operating Temperature: -30°C to 85°C


Materials

- CASE: diallyl phthalate (DAP)
- PLUNGER: Glass filled nylon or glass filled polyester (UL94V-0)
- BUSHING: Copper alloy, nickel plated (1/4-20)
- HOUSING: Stainless Steel
- CONTACT & TERMINAL: Copper alloy, silver plated

Model No.	Switching position	
	on	Mom
Term. Conn.	1-3	1-2

SPDT

Product Drawing

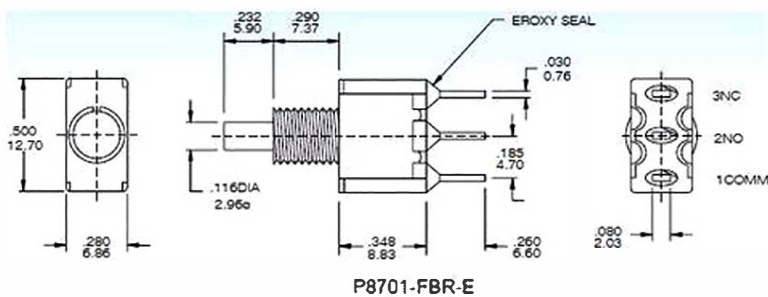

Safety Approval



Application

- Instrumentation and controls
- Telecommunication equipment
- Computer peripherals